


3 Port Manifold Data Sheet - OF-0003

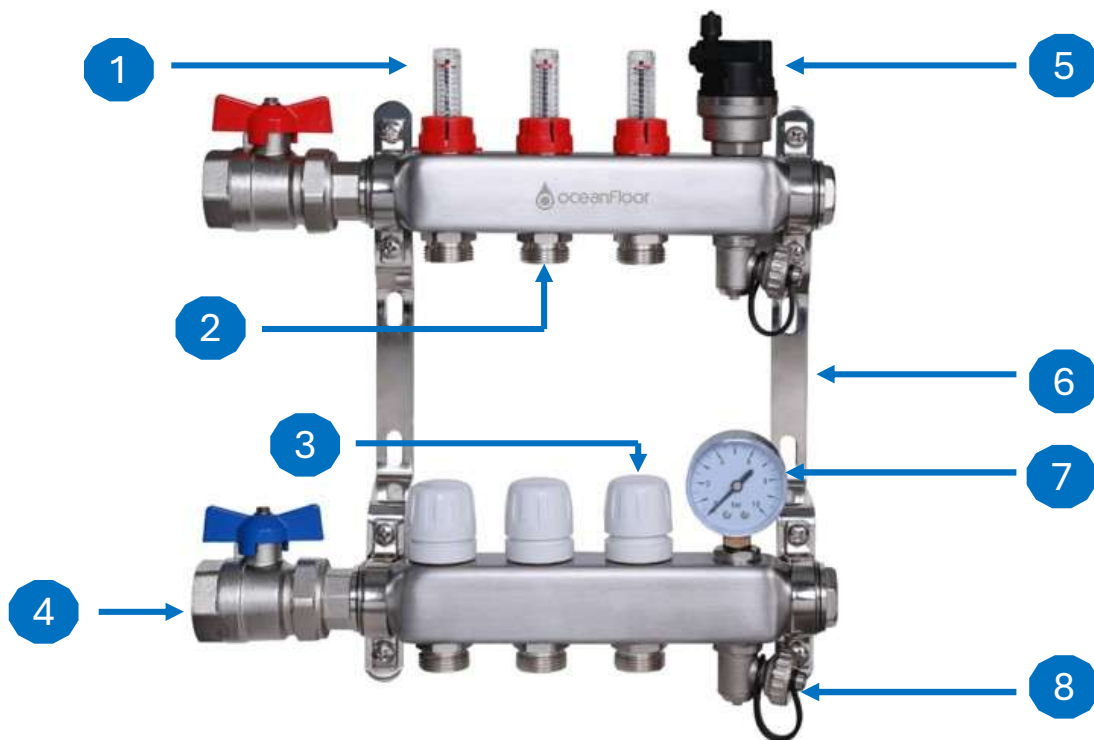

Product Components

1	Flow Meter (0-5 l/min)	5	Auto Air Vent (AAV)
2	3/4" Outlets for Pipe Connection	6	Manifold Bracket
3	Manual Valve Isolator	7	0-10 Bar Pressure Gauge
4	1" Connection Outlet & Ball Valve	8	Drain/Fill Valve

Product Features

- Standard UK spacing of 210 mm between the flow and return bars
- 50 mm centre-to-centre spacing between each port
- 1" threaded inlets designed to accommodate isolation valves
- Supplied pre-assembled on wall-mounting brackets for easy installation
- Compatible with 10 mm, 12 mm, 16 mm, and 20 mm pipework

3 Port Manifold Data Sheet - OF-0003



Product Overview

Our premium stainless steel underfloor heating manifolds are supplied pre-assembled on mounting brackets (pressure gauge supplied separately) for quick and easy installation.

When your manifold arrives, please check the contents to ensure all essential components are included for a complete setup:

- 1 × Auto Air Vent (AAV)
- 1 × Pair of 1" Ball Valves
- 1 × 10 Bar Pressure Gauge
- Flow meters with 0–5 L/min indicators
- 2 × Drain and Fill Valves

Product Sizing Guide

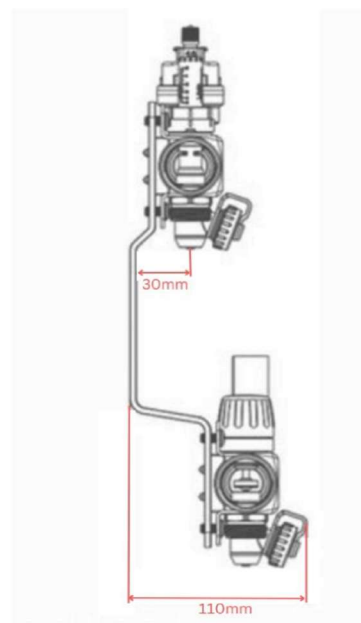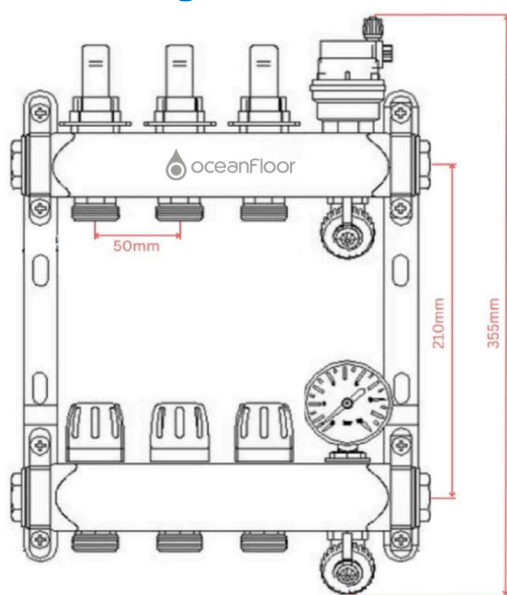

Number of Ports	2	3	4	5	6	7	8	9	10	11	12
Manifold Length exc Ball Valves (mm)	180	230	280	330	380	430	480	530	580	630	680
Manifold Length inc Ball Valves (mm)	275	325	375	425	475	525	575	625	675	725	775