


# 4 Port Manifold Data Sheet - OF-0004

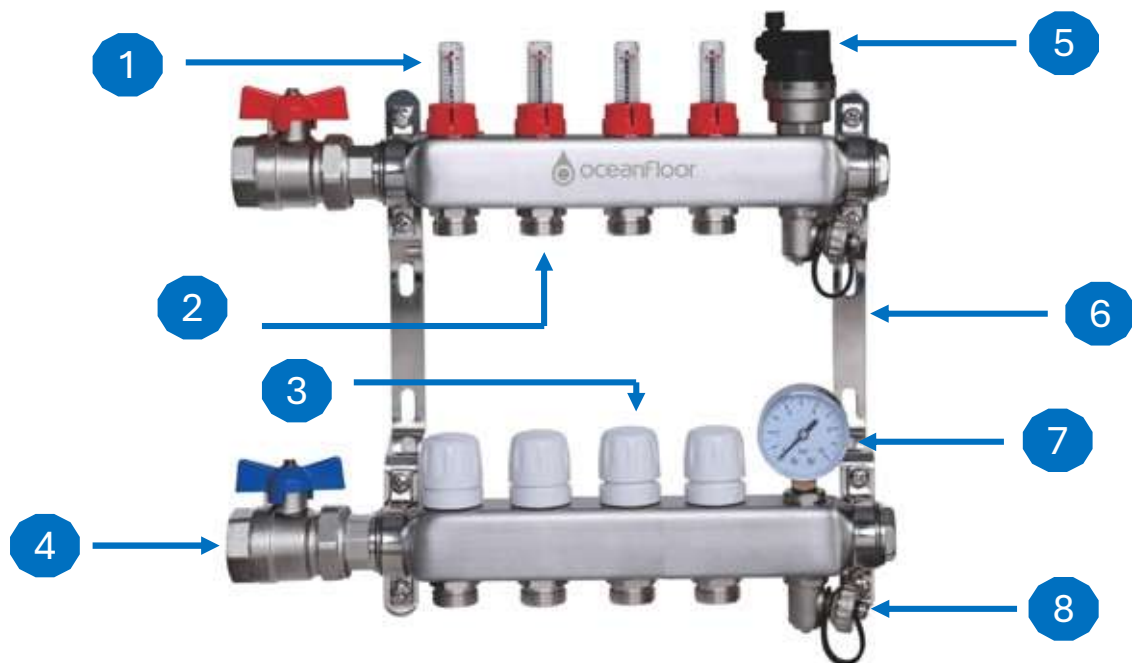

## Product Components

|   |                                   |   |                         |
|---|-----------------------------------|---|-------------------------|
| 1 | Flow Meter (0-5 l/min)            | 5 | Auto Air Vent (AAV)     |
| 2 | 3/4" Outlets for Pipe Connection  | 6 | Manifold Bracket        |
| 3 | Manual Valve Isolator             | 7 | 0-10 Bar Pressure Gauge |
| 4 | 1" Connection Outlet & Ball Valve | 8 | Drain/Fill Valve        |

## Product Features

- Standard UK spacing of 210 mm between the flow and return bars
- 50 mm centre-to-centre spacing between each port
- 1" threaded inlets designed to accommodate isolation valves
- Supplied pre-assembled on wall-mounting brackets for easy installation
- Compatible with 10 mm, 12 mm, 16 mm, and 20 mm pipework

# 4 Port Manifold Data Sheet - OF-0004



## Product Overview

Our premium stainless steel underfloor heating manifolds are supplied pre-assembled on mounting brackets (pressure gauge supplied separately) for quick and easy installation.

When your manifold arrives, please check the contents to ensure all essential components are included for a complete setup:

- 1 × Auto Air Vent (AAV)
- 1 × Pair of 1" Ball Valves
- 1 × 10 Bar Pressure Gauge
- Flow meters with 0–5 L/min indicators
- 2 × Drain and Fill Valves

## Product Sizing Guide

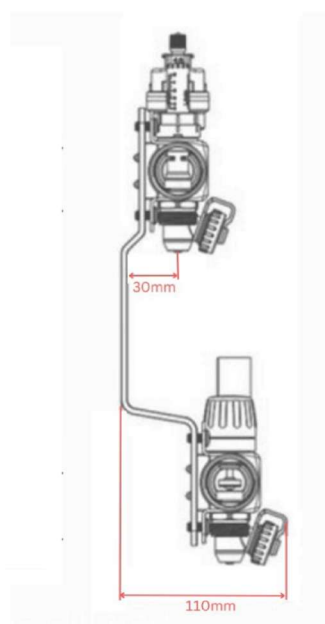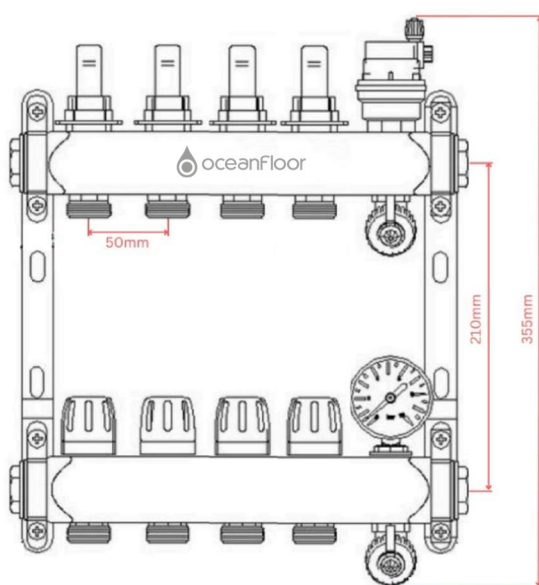

| Number of Ports                      | 2   | 3   | 4   | 5   | 6   | 7   | 8   | 9   | 10  | 11  | 12  |
|--------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Manifold Length exc Ball Valves (mm) | 180 | 230 | 280 | 330 | 380 | 430 | 480 | 530 | 580 | 630 | 680 |
| Manifold Length inc Ball Valves (mm) | 275 | 325 | 375 | 425 | 475 | 525 | 575 | 625 | 675 | 725 | 775 |