



Qty.	Description																		
1	UPS4 GO 25-65 130  Note! Product picture may differ from actual product Product No.: 93074168 UPS4 GO is a high-efficiency circulator pump fitted with an electronically commutated motor and designed for circulating liquids in heating and air conditioning systems. UPS4 GO is equipped with intelligent controls and offers three control modes: constant pressure, proportional pressure and constant curve. Each mode has three adjustable speed settings. Replacement of older integrated and stand-alone circulator pumps, including replicating curves, is made easy by using the Grundfos GO app and operating panel. The toolless installer plug enables a fast and easy electrical connection. The automatic self-venting ability and dry-running protection ensure quiet operation and reliability of the pump. The product features robust startup which reduces the risk of blockages from dirt, magnetite and limescale build-up. In the unlikely case of a blocked pump, the motor continuously attempts to start at the highest possible torque, ensuring startup in tough conditions. The ceramic shaft and bearings experience minimal wear, resulting in a longer lifespan and a reduced likelihood of noise in the system due to increased bearing clearance from wear. Fault finding is fast and easy by using the error codes on the pump operating panel. Controls: <table> <tr> <td>Frequency converter:</td><td>Built-in</td></tr> </table> Liquid: <table> <tr> <td>Pumped liquid:</td><td>Water</td></tr> <tr> <td>Liquid temperature range:</td><td>-10 .. 110 °C</td></tr> <tr> <td>Selected liquid temperature:</td><td>20 °C</td></tr> <tr> <td>Density:</td><td>998.2 kg/m³</td></tr> </table> Technical: <table> <tr> <td>Rated flow:</td><td>2.43 m³/h</td></tr> <tr> <td>Rated head:</td><td>3.76 m</td></tr> <tr> <td>Pump head orientation:</td><td>9H</td></tr> <tr> <td>Approvals:</td><td>CE,UKCA,VDE</td></tr> </table>	Frequency converter:	Built-in	Pumped liquid:	Water	Liquid temperature range:	-10 .. 110 °C	Selected liquid temperature:	20 °C	Density:	998.2 kg/m ³	Rated flow:	2.43 m ³ /h	Rated head:	3.76 m	Pump head orientation:	9H	Approvals:	CE,UKCA,VDE
Frequency converter:	Built-in																		
Pumped liquid:	Water																		
Liquid temperature range:	-10 .. 110 °C																		
Selected liquid temperature:	20 °C																		
Density:	998.2 kg/m ³																		
Rated flow:	2.43 m ³ /h																		
Rated head:	3.76 m																		
Pump head orientation:	9H																		
Approvals:	CE,UKCA,VDE																		

Qty.	Description
1	Materials: Pump housing: Cast iron EN 1561 EN-GJL-150 ASTM A48-150B Impeller: Composite PES+30% GF Installation: Range of ambient temperature: 0 .. 55 °C Maximum operating pressure: 10 bar Pipe connection standard: ISO 228-1 Type of connection: G Size of connection: 1 1/2 inch Pressure rating for connection: PN 10 Port-to-port length: 130 mm Electrical data: P1 min.: 4 W Max. P1: 60 W Mains frequency: 50 / 60 Hz Rated voltage: 1 x 220-240 V Minimum current consumption: 0.06 A Maximum current consumption: 0.6 A Enclosure class (IEC 34-5): IP44 Insulation class (IEC 85): F Thermal protection: Electronic Others: Energy (EEI): 0.20 Net weight: 1.86 kg Gross weight: 2.04 kg Shipping volume: 0.004 m³


93074168 UPS4 GO 25-65 130

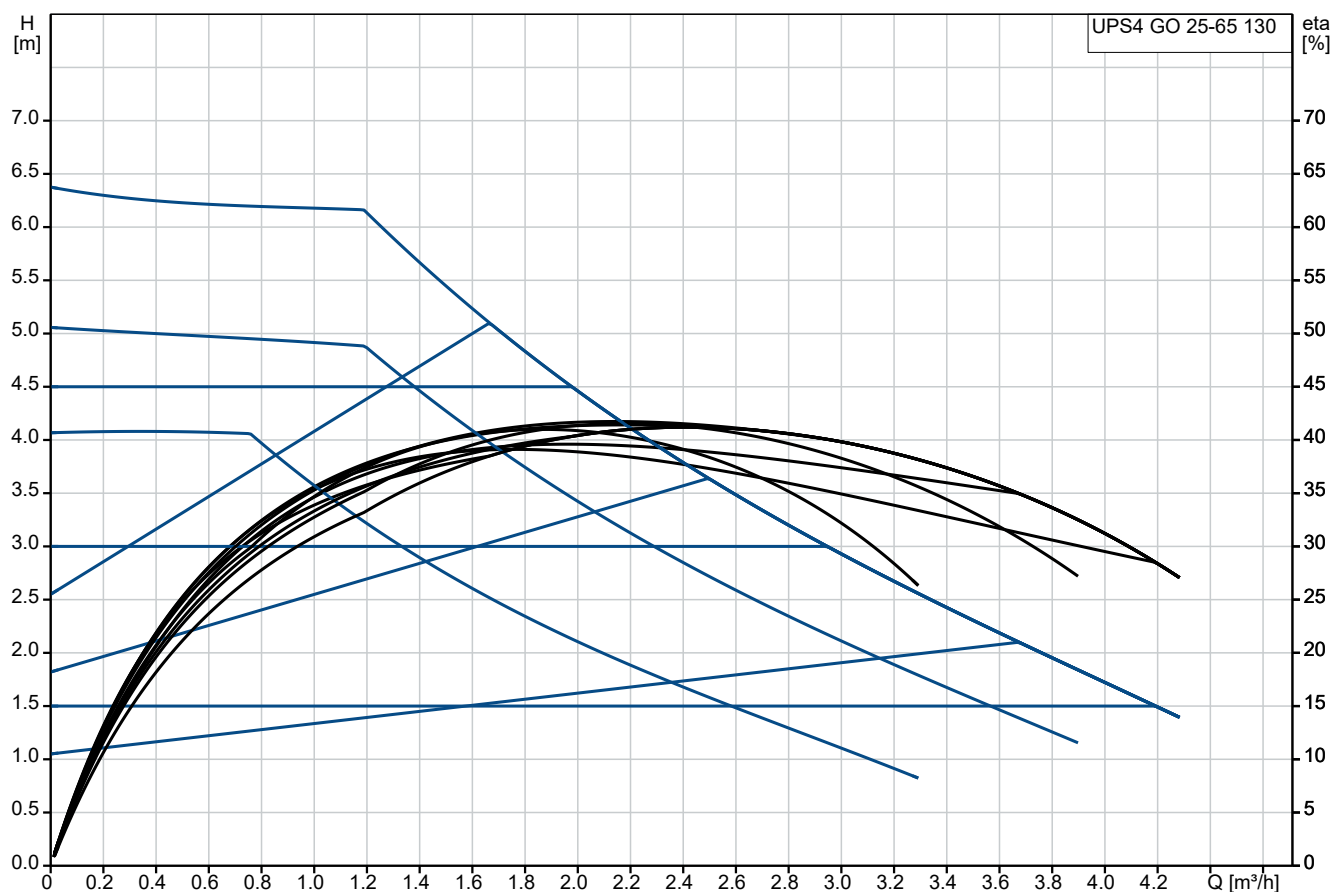




Pumped liquid = Water
 Liquid temperature during operation = 20 °C
 Density = 998.2 kg/m³

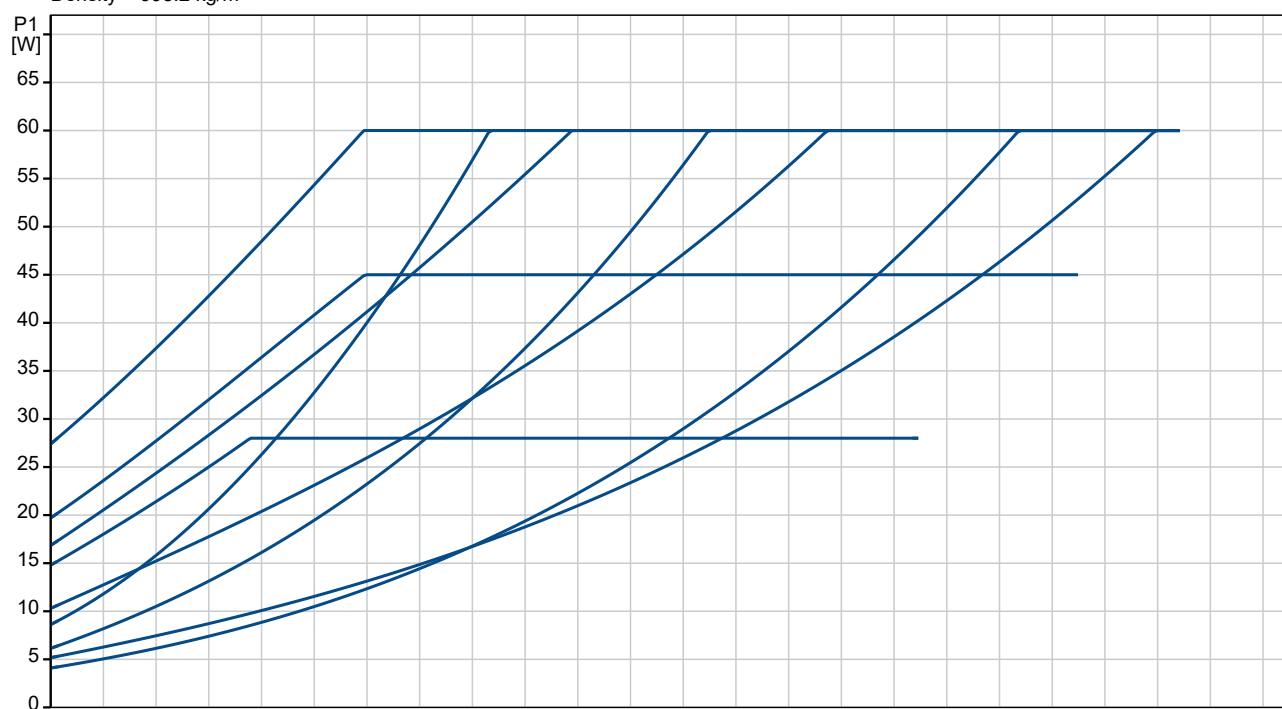



Description	Value
General information:	
Product name:	UPS4 GO 25-65 130
Product No:	93074168
EAN number:	5715467403947
Technical:	
Rated flow:	2.43 m³/h
Rated head:	3.76 m
Maximum head:	65 dm
Pump head orientation:	9H
Approvals:	CE, UKCA, VDE
Model:	A
Materials:	
Pump housing:	Cast iron
	EN 1561 EN-GJL-150
	ASTM A48-150B
Impeller:	Composite
	PES+30% GF
Installation:	
Range of ambient temperature:	0 .. 55 °C
Maximum operating pressure:	10 bar
Pipe connection standard:	ISO 228-1
Type of connection:	G
Size of connection:	1 1/2 inch
Pressure rating for connection:	PN 10
Port-to-port length:	130 mm
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	-10 .. 110 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m³
Electrical data:	
P1 min.:	4 W
Max. P1:	60 W
Mains frequency:	50 / 60 Hz
Rated voltage:	1 x 220-240 V
Minimum current consumption:	0.06 A
Maximum current consumption:	0.6 A
Enclosure class (IEC 34-5):	IP44
Insulation class (IEC 85):	F
Thermal protection:	Electronic
Controls:	
Frequency converter:	Built-in
Others:	
Energy (EEI):	0.20
Net weight:	1.86 kg
Gross weight:	2.04 kg
Shipping volume:	0.004 m³
Sales region:	Great Britain

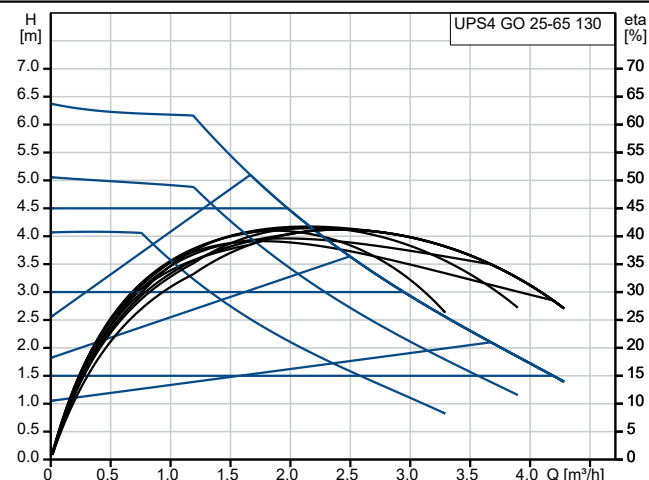

Pumped liquid = Water
Liquid temperature during operation = 20 °C
Density = 998.2 kg/m³

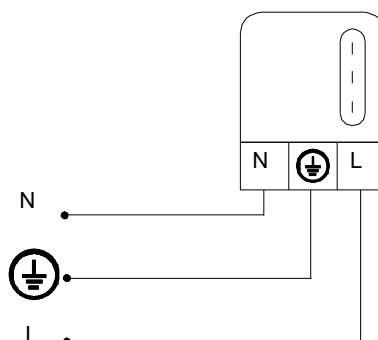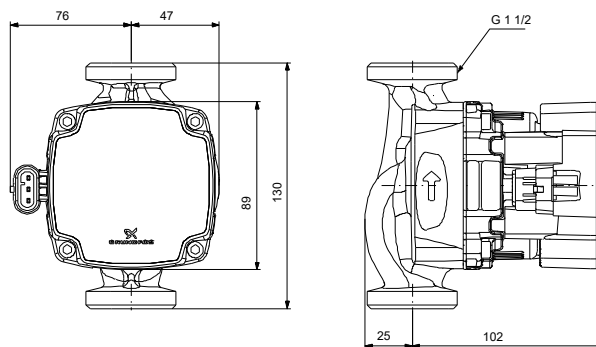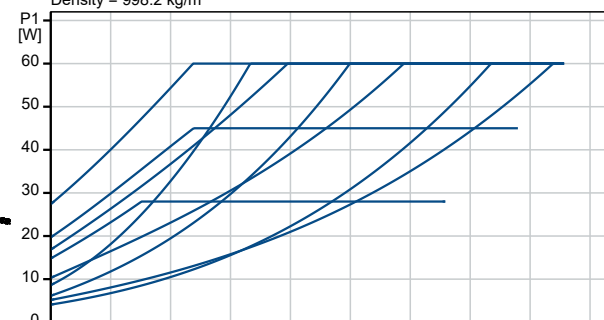


93074168 UPS4 GO 25-65 130

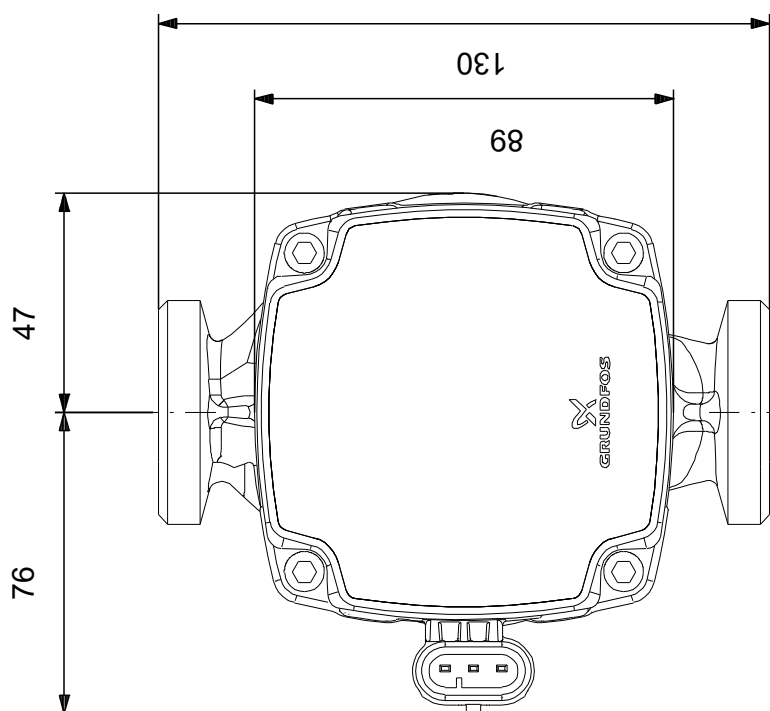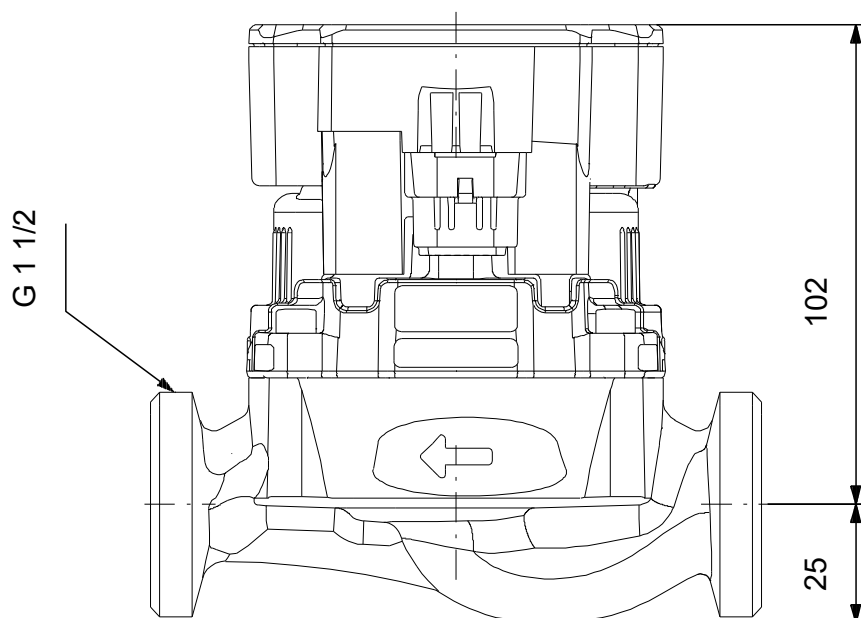

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

93074168 UPS4 GO 25-65 130

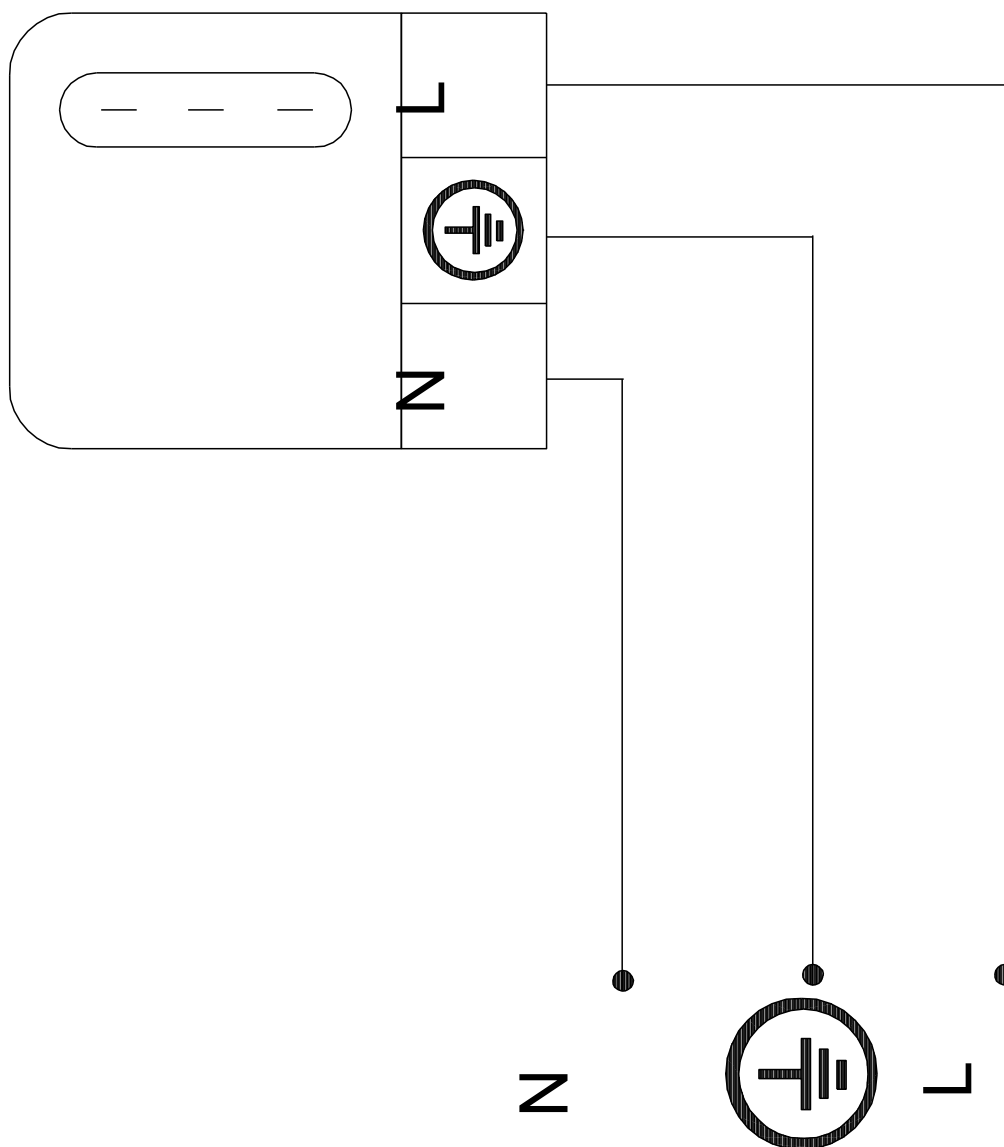

Note! All units are in [mm] unless others are stated.