

AOYG60LATT

Please visit our webstore for full product and technical documentation



Nominal Cooling Capacity	(kW)	15.0
Nominal Heating Capacity	(kW)	18.0
Height (mm)		1290
Width (mm)		900
Depth (mm)		330
Weight (kg)		104
Airflow Rate - Cooling - High	(m ³ /h)	6900
Airflow Rate - Heating - High	(m ³ /h)	7300
Sound Pressure Level - Cooling - High	(dB(A))	56
Sound Pressure Level - Heating - High	(dB(A))	58
Refrigerant Type (Global Warming Potential)		R410A (2,088)
Liquid Pipe Size		3/8"
Gas Pipe Size		5/8"
Min - Max Pipe Length	(m)	5 - 75
Max Height Difference	(m)	30
Refrigerant Charge (kg)	(kg)	3.45
Refrigerant CO ₂ eq-T		7.204
Precharged For	(m)	30
Additional Charge (g/m)	(g/m)	50
Unit Power Supply		3Ph-400V-50Hz
Suggested Fuse Size	(A)	16
Cooling Mode Minimum Ambient	(°C)	-15
Cooling Mode Maximum Ambient	(°C)	46
Heating Mode Minimum Ambient	(°C)	-15
Heating Mode Maximum Ambient	(°C)	24

Document Downloads

[Accessories](#)

[Refrigerant Circuit](#)

[Airflow](#)

[Spare Parts List All Pages](#)

[Capacity Correction](#)

[Specifications](#)

[Dimensional Drawing](#)

[Wiring Diagram](#)

[Function Settings](#)

[Inputs & Outputs](#)

[Installation Manual](#)


[Noise Curve](#)

[Product Image](#)


Related Items

[ARYG60LHTA](#)


15.0kW High Static Ducted Indoor Unit - R410A

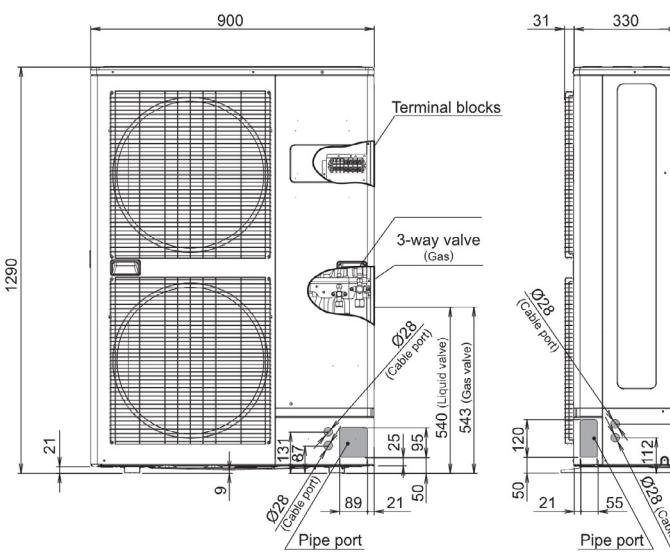

Front view

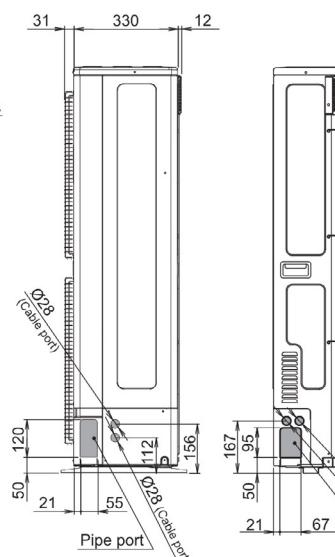

Side view

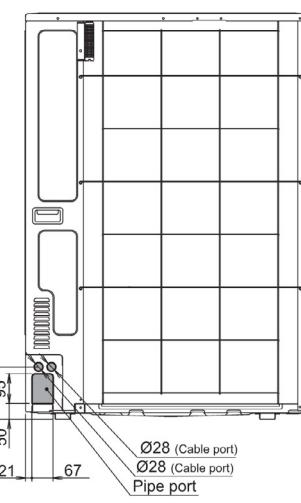

Rear view

Units: mm

• Specifications and design are subject to change without notice for further improvement.

• Actual products' colors may be different from the colors shown in this printed material.

FUJITSU GENERAL AIR CONDITIONING (UK) LIMITED

Unit 150, Centennial Park, Centennial Avenue, Elstree, Borehamwood, Herts, WD6 3SG

www.fujitsu-general.com/uk

sales@fgac.fujitsu-general.com

Tel: +44 (0) 208 731 3450 Fax: +44 (0) 208 731 3451