

Residential Splits

Daikin Split Systems	90
Wall Mounted	92
Multi Series Systems	99
Ducted Units	103
Easyzone	105
Floor Standing Cased	108
Concealed Floor Standing	109
Ceiling Suspended	110
Split System Controls	111
Aesthetic Customisation of Units	113

Daikin Split Systems

Designed with quality and efficiency in mind, Daikin's stylish split units provide both heating and cooling ensuring comfort all year round.

1. Flexibility

Daikin offer a variety of award winning indoor units, whether you are looking for wall mounted, floor standing or concealed ceiling units. They are available in a range of different sizes and colours to suit any room.



reddot design award
winner 2013



Silver FTXA-CS



Black FTXA-CB



Silver FTXJ-AS9



Black FTXJ-AB9




FDXM-F9



2. High heating capacity

Daikin split systems such as Emura (FTXJ-A9/RXJ) and Perfera (FTXM-A/RXM) can provide heating down to -20°C.

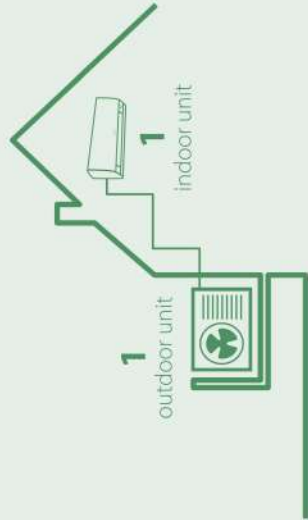

Connecting one
indoor unit to one
outdoor unit


3. Full comfort offering heating and cooling

Daikin split systems provide both heating and cooling and offer exceptional comfort thanks to intelligent sensors and airflow techniques.



Intelligent thermal sensor

Stylish FTXA and Daikin Emura FTXJ use an intelligent 64 grid sensor to detect the surface temperature of a room to create a more comfortable climate by directing the airflow that requires cooling or heating.



3-D air flow

Combines vertical and horizontal auto-swing to circulate a stream of warm or cool air right to the corners of even large spaces.



Coanda effect

By using specially designed flaps, a more focused airflow allows a better temperature distribution throughout the whole room.



Heat boost

Heat boost quickly heats up your home when starting up your heat pump system. Set temperature is reached 14% faster* than a regular air-to-air heat pump (pair only).

* Heat boost test condition: 50 class, outdoor temperature 2°C - Indoor temperature 10°C, R/C setting, 23°C

* Applicable for Daikin Emura, Stylish and Perfera

4. Control your units, wherever you are

All indoor units are individually controlled by a remote control or via the Onecta app. The Daikin Onecta app enables scheduling, controlling and monitoring of each air-to-air heat pump unit as well as control and monitoring of the domestic hot water tank – via voice control. Onecta is compatible with Amazon Alexa and Google Assistant.



Unit cooling and heating capacities shown within this section are based on the following conditions (db):

Nominal cooling	Nominal heating	UK cooling
Ambient = 35°C	Ambient = 7°C	Ambient = 30°C
Internal = 27°C	Internal = 20°C	Internal = 22°C

Split

* Available as option
** The Flash Streamer technology is not meant to be used for medical purposes

FTXZ-N / RXZ-N

Wall Mounted – Ururu Sarara



Accessories:

Accessory Ref	Description	Trade Price
BRC073	Wired remote control - connection cable required	£119.00
BRCW901A03	3m extension cord required for wired remote controller BRC073	£17.00
BRCW901A08	8m extension cord required for wired remote controller BRC073	£30.00
BRP069B42	Wi-Fi adapter for use with Daikin ONECTA App	£90.00
K.CWB90-2	Wall bracket (90kg, 500mm support arm)	£51.00
K.DT1	Condensate drip tray for use with K.CWB90-2	£79.00
K.FF6005	Two flexi-feet (Standard 600mm x 185mm x 100mm) to mount the outdoor unit	£67.00
K.CGM	Condensing unit guard (1150 x 1150 x 650)	£453.00
KLIC-DDV3	KNX interface for Split type systems	£250.00
KPMH950A4L	L-shaped cuffs for humidification hose (10 pieces)	£51.00
KPMH974B403	Humidification hose extension set (2m length)	£69.00
KPMH974B43	Hose for humidification (10m length)	£203.00
KPMJ942A4	Humidification hose extension joints (10 pieces)	£51.00
KPMJ983A4L	L-shaped joints for humidification hose (10 pieces)	£159.00
KRP413A1S	Adaptor PCB for remote on/off control - constant/pulse contact	£112.00
KRP928A2S	Adaptor PCB for interface to Daikin centralised control systems	£202.00
RTD-RA	Adaptor PCB for Modbus connection and/or extended system functions	£232.00

Indoor Units	FTXZ25N	FTXZ35N	FTXZ50N
Capacity			
UK Total Cooling	kW	2.44	4.89
UK Sensible Cooling	kW	2.11	3.49
Nominal Cooling	kW	2.5	5.0
Nominal Heating	kW	3.6	6.3
Seasonal Efficiency (EN14825) COOLING			
Energy Label	A+++	A+++	A+++
PDesign	3.5	3.5	5.0
SEER	9.54	9.00	8.60
Annual Energy Consumption	kWh	92	203
Seasonal Efficiency (EN14825) HEATING			
Energy Label	A+++	A+++	A+++
PDesign	3.5	4.5	5.6
SCOP	5.90	5.73	5.50
Annual Energy Consumption	kWh	831	1427
Air Flow Rate (Cooling)	High / Low / Silent	10.7 / 5.3 / 4.0	12.1 / 6.6 / 4.6
Dimensions			
Height	mm	295	295
Width	mm	798	798
Depth	mm	372	372
Weight	kg	15	15
RAL Colour		RAL 9002	RAL 9002
Sound Pressure (Cooling)	High / Nom / Low / Silent	38 / 33 / 26 / 19	42 / 38 / 30 / 23
Sound Pressure (Heating)	High / Nom / Low / Silent	39 / 35 / 28 / 19	44 / 38 / 31 / 24
Sound Power (Cooling)	dBA	54	60

Outdoor Units	RXZ25N	RXZ35N	RXZ50N
Dimensions			
Height x Width x Depth	mm	693 x 795 x 300	693 x 795 x 300
Weight	kg	50	50
Electrical Details			
Power Supply	1ph	1ph	1ph
Running Current	A	1.80	4.80
Starting Current	A	2.8	6.2
Max Fuse Size	A	16	16
Interconnection Wiring	Core / Cable size	3+E / 1.5	3+E / 1.5
Piping Connections	Liquid / Gas	1/4 (6.4) / 3/8 (9.5)	1/4 (6.4) / 3/8 (9.5)
Pipework			
Maximum Length	m	10	10
Maximum Vertical Rise	m	8	8
Precharged to	g/m	10	10
Additional charge	g/m	-	-
Holding Charge	kg	1.34	1.34
Sound Pressure (Cooling)	High / Low / Silent	46 / - / -	49 / - / -
Sound Pressure (Heating)	High / Low / Silent	46 / - / -	50 / - / -
Sound Power (Cooling)	dBA	59	63
Operating Range (Cooling)	Min / Max	-10 / 43	-10 / 43
Operating Range (Heating)	Min / Max	-20 / 18	-20 / 18
Air Flow Rate (Cooling)	High	31	34-4
Meets ETL criteria		●	●

Trade Fan Coil Price	£511.00	£600.00	£786.00
Trade Condensing Unit Price	£1,385.00	£1,605.00	£1,687.00
Total System Price	£1,896.00	£2,205.00	£2,473.00

Notes & Features:

- The pinnacle of comfort cooling using integrated: ventilation, humidification (in Heating Mode) and dehumidification (in Cooling/Dry Mode), to deliver maximum efficiencies and comfort
- All fan coils are supplied with infrared remote controller ARC477A1
- The supplied humidifying hose is 8m long
- Self cleaning filters ensure optimum air quality & efficiency of operation
- Three-area intelligent eye ensures air is directed away from people in the room



Wall Mounted – Emura



RXJ20-35A

Accessories:

Accessory Ref	Description	Trade Price
EKR521	Wire harness for S21 port for all marked (*) options	£9.00
BRC073*	Wired remote control - connection cable required	£119.00
BRCW901A03	3m extension cord required for wired remote controller BRC073	£17.00
BRCW901A08	8m extension cord required for wired remote controller BRC073	£30.00
K.CGM	Condensing unit guard (1150 x 1150 x 650)	£453.00
K.CG5	Condensing unit guard (750 x 1050 x 460)	£328.00
K.CWB90-2	Wall bracket (90kg, 500mm support arm)	£51.00
K.DT1	Condensate drip tray for use with K.CWB90-2	£79.00
K.FF600S	Two flexi-feet (Standard 600mm x 185mm x 100mm) to mount the outdoor unit	£67.00
KLIC-DDV3*	KNX interface for Split type systems	£250.00
KRP413A1S*	Adaptor PCB for remote on/off control - constant/pulse contact	£112.00
KRP928A2S*	Adaptor PCB for interface to Daikin centralised control systems	£202.00
RTD-RA*	Adaptor PCB for Modbus connection and/or extended system functions	£232.00

Indoor Units	White (RAL 9002)			Silver (RAL 9006)			Black (RAL 9005)		
	FTXJ20AW9	FTXJ25AW9	FTXJ35AW9	FTXJ20AS9	FTXJ25AS9	FTXJ35AS9	FTXJ20AB9	FTXJ25AB9	FTXJ35AB9
	Capacity	Capacity	Capacity	Capacity	Capacity	Capacity	Capacity	Capacity	Capacity
Capacity	UK Total Cooling	1.95	2.44	1.95	2.44	3.32	1.95	2.44	3.32
	UK Sensible Cooling	1.71	1.98	1.71	1.98	2.43	1.71	1.98	2.43
	Nominal Cooling	2.0	2.5	2.0	2.5	3.4	2.0	2.5	3.4
	Nominal Heating	2.5	2.8	2.5	2.8	4.0	2.5	2.8	4.0
Seasonal Efficiency (EN14825)	Energy Label	A+++	A+++	A+++	A+++	A+++	A+++	A+++	A+++
	Pdesign	2.00	2.50	2.00	2.50	3.40	2.00	2.50	3.40
	SEER	8.75	8.74	8.75	8.74	8.73	8.75	8.74	8.73
	Annual Energy Consumption kWh	80	100	80	100	136	80	100	136
Seasonal Efficiency (EN14825)	Energy Label	A+++	A+++	A+++	A+++	A+++	A+++	A+++	A+++
	Pdesign	2.40	2.45	2.40	2.45	2.50	2.40	2.45	2.50
	SCOP	5.15	5.15	5.15	5.15	5.15	5.15	5.15	5.15
	Annual Energy Consumption kWh	652	666	652	666	680	652	666	680
Air Flow Rate (Cooling)	High / Med / Low / Silent	11.0 / 8.4 / 6.0 / 4.6	11.4 / 8.6 / 6.0 / 4.6	11.8 / 8.6 / 6.0 / 4.6	11.0 / 8.4 / 6.0 / 4.6	11.8 / 8.6 / 6.0 / 4.6	11.0 / 8.4 / 6.0 / 4.6	11.4 / 8.6 / 6.0 / 4.6	11.8 / 8.6 / 6.0 / 4.6
	Dimensions	305 x 900 x 212	305 x 900 x 212	305 x 900 x 212	305 x 900 x 212	305 x 900 x 212	305 x 900 x 212	305 x 900 x 212	305 x 900 x 212
	Weight	12	12	12	12	12	12	12	12
	Sound Pressure (Cooling) dBA	39/32/25/19	40/33/25/19	41/33/25/19	39/32/25/19	40/33/25/19	41/33/25/19	40/33/25/19	41/33/25/19
Sound Pressure (Heating)	High / Med / Low / Silent	39/32/25/19	40/33/25/19	41/33/25/19	39/32/25/19	40/33/25/19	41/33/25/19	40/33/25/19	41/33/25/19
	Dimensions	305 x 900 x 212	305 x 900 x 212	305 x 900 x 212	305 x 900 x 212	305 x 900 x 212	305 x 900 x 212	305 x 900 x 212	305 x 900 x 212
	Weight	12	12	12	12	12	12	12	12
	Sound Pressure (Heating) dBA	46/39/31/24	46/39/31/24	46/39/31/24	46/39/31/24	46/39/31/24	46/39/31/24	46/39/31/24	46/39/31/24
Sound Pressure (Cooling)	High / Med / Low / Silent	46/39/31/24	46/39/31/24	46/39/31/24	46/39/31/24	46/39/31/24	46/39/31/24	46/39/31/24	46/39/31/24
	Dimensions	305 x 900 x 212	305 x 900 x 212	305 x 900 x 212	305 x 900 x 212	305 x 900 x 212	305 x 900 x 212	305 x 900 x 212	305 x 900 x 212
	Weight	12	12	12	12	12	12	12	12
	Sound Pressure (Cooling) dBA	46/39/31/24	46/39/31/24	46/39/31/24	46/39/31/24	46/39/31/24	46/39/31/24	46/39/31/24	46/39/31/24
Outdoor Units	Height x Width x Depth	552 x 840 x 350	552 x 840 x 350	552 x 840 x 350	552 x 840 x 350	552 x 840 x 350	552 x 840 x 350	552 x 840 x 350	552 x 840 x 350
	Dimensions	552 x 840 x 350	552 x 840 x 350	552 x 840 x 350	552 x 840 x 350	552 x 840 x 350	552 x 840 x 350	552 x 840 x 350	552 x 840 x 350
	Weight	32	32	32	32	32	32	32	32
	Electrical Details	Power Supply	1ph	1ph	1ph	1ph	1ph	1ph	1ph
Electrical Details	Maximum Input Current (MCA)	8.86	9.69	9.69	8.86	9.69	9.69	8.86	9.69
	Max Fuse Size	10	13	13	10	13	13	10	13
	Core / Cable size	3+E / 1.5	3+E / 1.5	3+E / 1.5	3+E / 1.5	3+E / 1.5	3+E / 1.5	3+E / 1.5	3+E / 1.5
	Liquid / Gas	1/4 (6.4) / 3/8 (9.5)	1/4 (6.4) / 3/8 (9.5)	1/4 (6.4) / 3/8 (9.5)	1/4 (6.4) / 3/8 (9.5)	1/4 (6.4) / 3/8 (9.5)	1/4 (6.4) / 3/8 (9.5)	1/4 (6.4) / 3/8 (9.5)	1/4 (6.4) / 3/8 (9.5)
Piping Connections	Maximum Length	20	20	20	20	20	20	20	20
	Maximum Vertical Rise	15	15	15	15	15	15	15	15
	Precharged to	10	10	10	10	10	10	10	10
	Additional charge	20	20	20	20	20	20	20	20
Sound Pressure (Cooling)	Holding Charge	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
	Nominal	46	46	46	46	46	46	46	46
	Sound Pressure (Heating) dBA	47	47	47	47	47	47	47	47
	Nominal	60	60	60	60	60	60	60	60
Sound Pressure (Cooling)	Operating Range (Cooling) Min / Max	-10 / 50	-10 / 50	-10 / 50	-10 / 50	-10 / 50	-10 / 50	-10 / 50	-10 / 50
	Operating Range (Heating) Min / Max	-21 / 18	-21 / 18	-21 / 18	-21 / 18	-21 / 18	-21 / 18	-21 / 18	-21 / 18
	Air Flow Rate (Cooling) m³/min	34.0	34.0	34.0	34.0	34.0	34.0	34.0	34.0
	Nominal	34.0	34.0	34.0	34.0	34.0	34.0	34.0	34.0
Meets ETL criteria	Meets ETL criteria	•	•	•	•	•	•	•	•
	Indoor Trade Price - White	£435.00	£457.00	£513.00	£435.00	£457.00	£513.00	£435.00	£457.00
	Indoor Trade Price - Silver	£518.00	£545.00	£611.00	£518.00	£545.00	£611.00	£518.00	£545.00
	Indoor Trade Price - Black	£477.00	£502.00	£563.00	£477.00	£502.00	£563.00	£477.00	£502.00
Condensing Unit Trade Price	Condensing Unit Trade Price	£789.00	£832.00	£965.00	£789.00	£832.00	£965.00	£789.00	£832.00
	Total System Price - White	£1,224.00	£1,289.00	£1,478.00	£1,224.00	£1,289.00	£1,478.00	£1,224.00	£1,289.00
	Total System Price - Silver	£1,307.00	£1,377.00	£1,576.00	£1,307.00	£1,377.00	£1,576.00	£1,307.00	£1,377.00
	Total System Price - Black	£1,266.00	£1,334.00	£1,528.00	£1,266.00	£1,334.00	£1,528.00	£1,266.00	£1,334.00

Notes & Features:

- All fan coils are supplied with colour matching infrared remote controller ARC48A1 (7-day schedule timer)
- Wired controller, KLIC-DDV3 and RTD-RA options cannot be combined
- Night set mode
- Air purifying filters deliver superior purification and deodorisation of the air inside the room
- Flash Streamer technology helps improve indoor air quality
- Five fan speed can be selected; from high to super low
- RXJ20-35A9 can reduce the sound power by a further 6 dB(A)



Wall Mounted – Stylish



Accessory Ref	Description	Trade Price
EKR521	Wire harness for new S21 port for all marked (*) options	£9.00
BRC073*	Wired remote control - connection cable required	£119.00
BRCW901A03	3m extension cord required for wired remote controller BRC073	£17.00
BRCW901A08	8m extension cord required for wired remote controller BRC073	£30.00
K.CGM	Condensing unit guard (1150 x 1150 x 650)	£453.00
K.CG5	Condensing unit guard (750 x 1050 x 460)	£328.00
K.CWB90-2	Wall bracket (90kg, 300mm support arm)	£51.00
K.DT1	Condensate drip tray for use with K.CWB90-2	£79.00
K.FF6005	Two flexi-feet (Standard 600mm x 185mm x 100mm) to mount the outdoor unit	£67.00
KLIC-DDV3*	KNX interface for Split type systems	£250.00
KRP413A15*	Adaptor PCB for remote on/off control - constant/pulse contact	£112.00
KRP928A25*	Adaptor PCB for interface to Daikin centralised control systems	£202.00
RTD-RA*	Adaptor PCB for Modbus connection and/or extended system functions	£232.00

Accessory Ref	Description	Trade Price
EKR521	Wire harness for new S21 port for all marked (*) options	£9.00
BRC073*	Wired remote control - connection cable required	£119.00
BRCW901A03	3m extension cord required for wired remote controller BRC073	£17.00
BRCW901A08	8m extension cord required for wired remote controller BRC073	£30.00
K.CGM	Condensing unit guard (1150 x 1150 x 650)	£453.00
K.CG5	Condensing unit guard (750 x 1050 x 460)	£328.00
K.CWB90-2	Wall bracket (90kg, 300mm support arm)	£51.00
K.DT1	Condensate drip tray for use with K.CWB90-2	£79.00
K.FF6005	Two flexi-feet (Standard 600mm x 185mm x 100mm) to mount the outdoor unit	£67.00
KLIC-DDV3*	KNX interface for Split type systems	£250.00
KRP413A15*	Adaptor PCB for remote on/off control - constant/pulse contact	£112.00
KRP928A25*	Adaptor PCB for interface to Daikin centralised control systems	£202.00
RTD-RA*	Adaptor PCB for Modbus connection and/or extended system functions	£232.00

Outdoor Units		RXA20A8	RXA25A8	RXA35A8	RXA42B8	RXA50B8
Dimensions	Height x Width x Depth	550 x 840 x 350	550 x 840 x 350	550 x 840 x 350	734 x 870 x 373	734 x 870 x 373
	Weight	32	32	32	50	50
Electrical Details	Power Supply	1ph	1ph	1ph	1ph	1ph
	Maximum Input Current (MCA)	9.88	11.17	12.29	12.8	12.8
Interconnection Wiring	Max Fuse Size	10	13	13	16	16
	Core / Cable Size	3+E / 1.5	3+E / 1.5	3+E / 1.5	3+E / 1.5	3+E / 1.5
Piping Connections Pipework	Liquid / Gas	1/4 (6.4) / 3/8 (9.5)	1/4 (6.4) / 3/8 (9.5)	1/4 (6.4) / 3/8 (9.5)	1/4 (6.4) / 3/8 (9.5)	1/4 (6.4) / 1/2 (12.7)
	Maximum Length	20	20	20	30	30
	Maximum Vertical Rise	15	15	15	20	20
	Precharged to	10	10	10	10	10
	Additional charge	20	20	20	20	20
Sound Pressure (Cooling)	Holding charge	0.76	0.76	0.76	1.1	1.1
	Nominal	46	46	49	48	48
Sound Power (Cooling)	dBA	59	59	61	62	62
	Operating Range (Cooling)	-10 / 46	-10 / 46	-10 / 46	-10 / 46	-10 / 46
Operating Range (Heating)	Min / Max	-15 / 18	-15 / 18	-15 / 18	-15 / 18	-15 / 18
	Air Flow Rate (Cooling)	34.0	34.0	36.0	46.6	46.6
Meets ETL criteria		●	●	●	●	●

Outdoor Units		RXA20A8	RXA25A8	RXA35A8	RXA42B8	RXA50B8
Dimensions	Height x Width x Depth	550 x 840 x 350	550 x 840 x 350	550 x 840 x 350	734 x 870 x 373	734 x 870 x 373
	Weight	32	32	32	50	50
Electrical Details	Power Supply	1ph	1ph	1ph	1ph	1ph
	Maximum Input Current (MCA)	9.88	11.17	12.29	12.8	12.8
Interconnection Wiring	Max Fuse Size	10	13	13	16	16
	Core / Cable Size	3+E / 1.5	3+E / 1.5	3+E / 1.5	3+E / 1.5	3+E / 1.5
Piping Connections Pipework	Liquid / Gas	1/4 (6.4) / 3/8 (9.5)	1/4 (6.4) / 3/8 (9.5)	1/4 (6.4) / 3/8 (9.5)	1/4 (6.4) / 3/8 (9.5)	1/4 (6.4) / 1/2 (12.7)
	Maximum Length	20	20	20	30	30
	Maximum Vertical Rise	15	15	15	20	20
	Precharged to	10	10	10	10	10
	Additional charge	20	20	20	20	20
Sound Pressure (Cooling)	Holding charge	0.76	0.76	0.76	1.1	1.1
	Nominal	46	46	49	48	48
Sound Power (Cooling)	dBA	59	59	61	62	62
	Operating Range (Cooling)	-10 / 46	-10 / 46	-10 / 46	-10 / 46	-10 / 46
Operating Range (Heating)	Min / Max	-15 / 18	-15 / 18	-15 / 18	-15 / 18	-15 / 18
	Air Flow Rate (Cooling)	34.0	34.0	36.0	46.6	46.6
Meets ETL criteria		●	●	●	●	●

Indoor Trade Price - White	£365.00	£413.00	£436.00	£489.00	£552.00	£644.00
Indoor Trade Price - Black	£399.00	£454.00	£478.00	£537.00	£606.00	£707.00
Indoor Trade Price - Silver	£436.00	£493.00	£519.00	£582.00	£657.00	£768.00
Condensing Unit Trade Price		£752.00	£792.00	£919.00	£1,049.00	£1,237.00
Total System Price - White		£1,165.00	£1,228.00	£1,408.00	£1,601.00	£1,881.00
Total System Price - Black		£1,206.00	£1,270.00	£1,456.00	£1,655.00	£1,944.00
Total System Price - Silver		£1,311.00	£1,311.00	£1,501.00	£1,706.00	£2,005.00

- All fan coils are supplied with infrared remote controller ARC466A85
- Fan with Coanda effect for optimum air distribution and indoor comfort
- Grid eye sensor redirects air away from the occupants in the room
- Flash Streamer technology helps improve indoor air quality
- Antibacterial Filter for effectively arresting small particulates



FTXM-A / RZAG-B

Wall Mounted – Mini Sky Air

SkyAir Alpha-series



50m
PIPE RUN



ARC466A86



RZAG35-608

Accessories:

Accessory Ref	Description	Trade Price
EKR521	Wire harness for S21 port for all marked (*) options	£9.00
BRC073*	Wired remote control - connection cable required	£119.00
BRCW901A03	3m extension cord required for wired remote controller BRC073	£17.00
BRCW901A08	8m extension cord required for wired remote controller BRC073	£30.00
K.CG.M	Condensing unit guard (1150 x 1150 x 650)	£453.00
K.CWB90-2	Wall bracket (90kg, 500mm support arm)	£51.00
K.DT1	Condensate drip tray for use with K.CWB90-2	£79.00
K.FF600S	Two flexi-feet (Standard 600mm x 185mm x 100mm) to mount the outdoor unit	£67.00
KLIC-DDV3*	KNX interface for Split type systems	£250.00
KRP413A15*	Adaptor PCB for remote on/off control - constant/pulse contact	£112.00
KRP928A25*	Adaptor PCB for interface to Daikin centralised control systems	£202.00
RTD-RA*	Adaptor PCB for Modbus connection and/or extended system functions	£232.00

Indoor Units		FTXM35A		FTXM50A		FTXM60A	
Capacity	UK Total Cooling	kW	3.42	4.89	5.86		
	UK Sensible Cooling	kW	2.52	3.36	3.98		
	Nominal Cooling	kW	3.5	5.0	6.0		
	Nominal Heating	kW	4.0	6.0	7.0		
Seasonal Efficiency (EN14825) COOLING	Energy Label		A++	A++	A++		
	Pdesign	kW	3.5	5.0	6.0		
	SEER		7.70	7.41	6.90		
	Energy Label		A++	A++	A+		
Seasonal Efficiency (EN14825) HEATING	Pdesign	kW	2.6	4.5	4.6		
	SCOP		4.60	4.60	4.35		
	Air Flow Rate (Cooling)	High / Med / Low / Silent	m³/min	12.7 / 10.4 / 7.8 / 5.9		15.6 / 13.4 / 11.2 / 8.6	
	Dimensions	Height	mm	298	298	299	
Weight	Width	mm	804	804	998		
	Depth	mm	252	252	292		
	Sound Pressure (Cooling)	High / Med / Low / Silent	kg	11.5	11.5	14.5	
	Sound Pressure (Heating)	High / Med / Low / Silent	dBA	45/37/29/19	46/40/33/27	46/42/37/30	
Sound Power (Cooling)	Sound Power (Cooling)	dBA	39/35/28/20	46/41/34/31	45/41/36/33		
	Sound Power (Cooling)	dBA	58	60	60		
Outdoor Units		RZAG35B		RZAG50B		RZAG60B	
Dimensions	Height x Width x Depth	mm	734 x 870 x 373	734 x 870 x 373	734 x 870 x 373		
	Weight	kg	52	52	52		
Electrical Details	Power Supply		1ph	1ph	1ph		
	Maximum Input Current (MCA) A		13.42	13.47	15.39		
	Max Fuse Size	A	16	16	16		
Interconnection Wiring	Core / Cable Size		3+E / 1.5	3+E / 1.5	3+E / 1.5		
	Liquid / Gas	inches (mm)	1/4 (6.4) / 3/8 (9.5)	1/4 (6.4) / 1/2 (12.7)	1/4 (6.4) / 1/2 (12.7)		
Piping Connections	Pipework						
	Maximum Length	m	50	50	50		
	Maximum Vertical Rise	m	30	30	30		
	Precharged to	m	30	30	30		
Additional charge	Additional charge	g/m	20	20	20		
	Holding charge	kg	1.55	1.55	1.55		
Sound Pressure (Cooling)	Nominal	dBA	48	49	50		
	Sound Pressure (Heating)	Nominal	dBA	48	49	50	
Sound Power (Cooling)	Sound Power (Cooling)	dBA	62	63	64		
	Operating Range (Cooling)	Min / Max	°CDB	-20 / 52	-20 / 52	-20 / 52	
Operating Range (Heating)	Operating Range (Heating)	Min / Max	°CWB	-20 / 24	-20 / 24		
	Air Flow Rate (Cooling)	High	m³/min	55.1	55.1	55.1	
Meets ETL criteria			●	●	●		

Indoor Unit Trade Price	£267.00	£414.00	£421.00
Condensing Unit Trade Price	£1,148.00	£1,401.00	£1,535.00
Total System Price	£1,415.00	£1,815.00	£1,956.00

Notes & Features:

- All fan coils are supplied with infrared remote controller ARC466A86 (7-day schedule timer)
- All fan coils have auto restart after power failure
- Wired controller, KLIC-DDV3 and RTD-RA options cannot be combined
- Night set mode
- Air purification using Flash Streamer technology
- New static air filter treated with an active (Iopure) substance to improve efficiencies.
- Presence sensor and two-area intelligent eye
- Five fan speeds can be selected; from high to super low
- Heat boost function to reach set point quicker during start-up



FTXM-A / RXM-A

Wall Mounted – Standard Inverter



RXM20.50

ARC466AS6

Accessories:

Accessory Ref	Description	Trade Price
EKR521	Wire harness for S21 port for all marked (*) options	£9.00
BRC073*	Wired remote control - connection cable required	£119.00
BRCW901A03	3m extension cord required for wired remote controller BRC073	£17.00
BRCW901A08	8m extension cord required for wired remote controller BRC073	£30.00
K.CGM	Condensing unit guard (1150 x 1150 x 650)	£453.00
K.CG5	Condensing unit guard (750 x 1050 x 460)	£328.00
K.CWB90-2	Wall bracket (90kg, 500mm support arm)	£51.00
K.DT1	Condensate drip tray for use with K.CWB90-2	£79.00
K.FF6005	Two flex-feet (Standard 600mm x 185mm x 100mm) to mount the outdoor unit	£67.00
KLIC-DDV3*	KNX interface for Split type systems	£250.00
KRP413A15*	Adaptor PCB for remote on/off control - constant/pulse contact	£112.00
KRP928A25*	Adaptor PCB for interface to Daikin centralised control systems	£202.00
RTD-RA*	Adaptor PCB for Modbus connection and/or extended system functions	£232.00

Indoor Units		FTXM20A	FTXM25A	FTXM35A	FTXM42A	FTXM50A	FTXM60A	FTXM71A
Capacity	UK Total Cooling	1.95	2.44	3.42	4.11	4.89	5.86	6.94
	UK Sensible Cooling	1.79	2.15	2.59	2.87	3.25	3.84	4.57
	Nominal Cooling	2.0	2.5	3.4	4.2	5.0	6.0	7.1
Seasonal Efficiency	Nominal Heating	2.5	2.8	4.0	5.4	5.8	7.0	8.2
	Energy Label	A+++	A+++	A+++	A++	A++	A++	A++
	Pdesign	2.0	2.5	3.4	4.2	5.0	6.0	7.1
COOLING	SEER	9.47	9.47	9.25	8.11	7.55	6.90	6.2
	Annual Energy Consumption	74	92	132	181	232	304	401
	Energy Label	A+++	A+++	A+++	A++	A++	A+	A+
Seasonal Efficiency	Pdesign	2.3	2.4	2.5	4.0	4.5	4.8	6.2
	SCOP	5.20	5.20	5.20	5.00	4.75	4.30	4.10
	Annual Energy Consumption	619	647	673	1120	1326	1562	2116
Air Flow Rate (Cooling)	High / Med / Low / Silent	11.9 / 8.9 / 6.3 / 4.9	11.9 / 8.9 / 6.3 / 4.9	13.2 / 9.4 / 7.1 / 4.6	13.3 / 9.8 / 7.2 / 5.0	12.7 / 10.4 / 7.8 / 5.9	15.6 / 13.4 / 11.2 / 8.6	15.8 / 13.6 / 11.4 / 9.3
Dimensions	Height	298	298	298	298	298	298	298
	Width	804	804	804	804	804	997	997
	Depth	252	252	252	252	252	292	292
Weight		11.5	11.5	11.5	11.5	11.5	14.5	14.5
Sound Pressure (Cooling)	High / Med / Low / Silent	41 / 33 / 25 / 19	41 / 33 / 25 / 19	45 / 37 / 29 / 19	45 / 38 / 30 / 21	46 / 40 / 33 / 27	46 / 42 / 36 / 30	47 / 43 / 37 / 32
Sound Pressure (Heating)	High / Med / Low / Silent	39 / 34 / 26 / 20	39 / 34 / 27 / 20	39 / 35 / 28 / 20	45 / 37 / 29 / 21	46 / 41 / 34 / 31	45 / 41 / 36 / 33	46 / 42 / 37 / 34
Sound Power (Cooling)		54	54	58	60	60	60	60

Outdoor Units		RXM20A	RXM25A9	RXM35A9	RXM42A	RXM50A8	RXM60A	RXM71A
Dimensions	Height x Width x Depth	610 x 923 x 367	610 x 923 x 367	610 x 923 x 367	610 x 923 x 367	610 x 923 x 367	734 x 954 x 401	734 x 954 x 401
Weight		36	36	36	40	40	49	55
Electrical Details	Power Supply	1ph	1ph	1ph	1ph	1ph	1ph	1ph
	Maximum Input Current (MCA)	9.19	10.01	10.11	11.54	12.69	15.09	19.78
Interconnection Wiring	Max Fuse Size	A 10	A 13	A 13	A 13	A 13	A 16	A 20
	Core / Cable size	3+E / 1.5	3+E / 1.5	3+E / 1.5	3+E / 1.5	3+E / 1.5	3+E / 1.5	3+E / 1.5
Piping Connections	Liquid / Gas	1/4 (6.4) / 3/8 (9.5)	1/4 (6.4) / 3/8 (9.5)	1/4 (6.4) / 3/8 (9.5)	1/4 (6.4) / 3/8 (9.5)	1/4 (6.4) / 1/2 (12.7)	1/4 (6.4) / 1/2 (12.7)	1/4 (6.4) / 5/8 (15.9)
Pipework	Maximum Length	20	20	20	30	30	30	30
	Maximum Vertical Rise	15	15	15	20	20	20	20
	Precharged to Additional Charge	10 / 20	10 / 20	10 / 20	10 / 20	10 / 20	10 / 20	10 / 20
Sound Pressure (Cooling)	Holding Charge	0.95	0.95	0.95	0.95	0.95	1.15	1.15
	Nominal	46	46	47	48	48	48	47
Sound Pressure (Heating)	Nominal	47	47	49	49	49	49	48
	Sound Power (Cooling)	59	59	60	60	61	60	60
Operating Range (Cooling)	Min / Max	-10 / 50	-10 / 50	-10 / 50	-10 / 50	-10 / 50	-10 / 50	-10 / 46
	°CDB	-21 / 18	-21 / 18	-21 / 18	-21 / 18	-21 / 18	-21 / 18	-15 / 18
Operating Range (Heating)	Min / Max	-21 / 18	-21 / 18	-21 / 18	-21 / 18	-21 / 18	-21 / 18	-15 / 18
	°CWB	-21 / 18	-21 / 18	-21 / 18	-21 / 18	-21 / 18	-21 / 18	-15 / 18
Air Flow Rate (Cooling)	Nominal	38.5	38.5	39.1	40.1	58.0	46.6	49.0
Meets ETL criteria		●	●	●	●	●	●	●

Indoor Unit Trade Price	£217.00	£234.00	£267.00	£300.00	£414.00	£421.00	£561.00
Condensing Unit Trade Price	£615.00	£668.00	£777.00	£876.00	£974.00	£1,037.00	£1,422.00
Total System Price	£832.00	£902.00	£1,044.00	£1,176.00	£1,388.00	£1,458.00	£1,983.00

Notes & Features:

- All fan coils are supplied with infrared remote controller ARC466A86 (7-day schedule timer)
- All fan coils have auto restart after power failure
- Wired controller, KLJC-DDV3, and RTD-RA options cannot be combined
- Night set mode
- Air purification using Flash Streamer technology
- New static air filter treated with an active (Iopure) substance to improve efficiencies.
- Presence sensor and 2-area intelligent eye
- 5 fan speeds can be selected; from high to super low
- Heat boost function to reach set point quicker during start-up
- RXM20-35A9 can reduce the sound power by a further 6 dBA)



FTXP-N(9) / RXP-N(9)

Wall Mounted – Low Inverter



RXP20-35N9

Accessories:

Accessory Ref	Description	Trade Price
BRC073*	Wired remote control - connection cable required - needs KRP980A1 for class 20-50	£119.00
KRP980A1	PCB Interface adaptor required for BRC073 (only sizes 2.0kw, 2.5kw, 3.5kw & 5.0kW)	£73.00
BRCW901A03	3m extension cord required for wired remote controller BRC073	£17.00
BRCW901A08	8m extension cord required for wired remote controller BRC073	£30.00
K.CWB90-2	Wall bracket (90kg, 500mm support arm)	£51.00
K.DT1	Condensate drip tray for use with K.CWB90-2	£79.00
K.FF6005	Two flexi-feet (Standard 600mm x 185mm x 100mm) to mount the outdoor unit	£67.00
K.CGS	Condensing unit guard (750 x 1050 x 460)	£328.00
K.CGM	Condensing unit guard (1150 x 1150 x 650)	£453.00
KLUC-DDV3*	KNX interface for Split type systems	£250.00
KRP413A1S	Adaptor PCB for remote on/off control - constant/pulse contact	£112.00
KRP928A2S*	Adaptor PCB for interface to Daikin centralised control systems	£202.00
RTD-RA*	Adaptor PCB for Modbus connection and/or extended system functions	£232.00

Indoor Units	FTXP20N9	FTXP25N9	FTXP35N9	FTXP50N9	FTXP60N	FTXP71N
Capacity						
UK Total Cooling	1.95	2.44	3.42	4.89	5.86	6.93
UK Sensible Cooling	1.69	1.94	2.49	3.42	4.00	4.73
Nominal Cooling	2.0	2.5	3.5	5.0	6.0	7.1
Nominal Heating	2.5	3.0	4.0	5.0	6.0	7.1
Energy Label	A++	A++	A++	A++	A++	A++
Pdesign	2.0	2.5	3.5	5.0	6.0	7.1
SEER	7.20	7.20	7.20	7.10	6.82	6.20
Annual Energy Consumption kWh	97	121	170	246	308	401
Energy Label	A++	A++	A++	A+	A+	A+
Pdesign	2.2	2.4	2.8	4.6	4.8	6.2
SCOP	4.65	4.61	4.64	4.34	4.10	4.01
Annual Energy Consumption kWh	663	728	845	1498	1638	2166
Air Flow Rate (Cooling)	High / Med / Low / Silent	9.9 / 7.5 / 5.6 / 4.4	11.5 / 8.3 / 6.3 / 4.5	16.3 / 14.0 / 11.5 / 8.3	16.8 / 14.4 / 11.8 / 9.2	16.8 / 14.4 / 11.8 / 10.1
Dimensions						
Height	286	286	286	286	295	295
Width	770	770	770	770	990	990
Depth	225	225	225	225	263	263
Weight	8.5	8.5	9	9	13.5	13.5
RAL Colour	RAL 9002	RAL 9002	RAL 9002	RAL 9002	RAL 9002	RAL 9002
Sound Pressure (Cooling)	High / Med / Low / Silent	39 / 33 / 25 / 19	43 / 34 / 27 / 20	43 / 39 / 34 / 27	45 / 41 / 36 / 30	46 / 42 / 37 / 32
Sound Pressure (Heating)	High / Med / Low / Silent	39 / 34 / 28 / 21	40 / 34 / 28 / 21	40 / 35 / 29 / 21	44 / 40 / 35 / 32	45 / 41 / 36 / 33
Sound Power (Cooling)	dBA	55	55	58	60	62
Outdoor Units	RXP20N9	RXP25N9	RXP35N9	RXP50N8	RXP60N9	RXP71N9
Dimensions						
Height x Width x Depth	556 x 740 x 343	556 x 740 x 343	556 x 740 x 343	610 x 923 x 367	734 x 954 x 401	734 x 954 x 401
Weight	24	24	24	40	50	50
Electrical Details						
Power Supply	1ph	1ph	1ph	1ph	1ph	1ph
Maximum Input Current (MCA)	7.99	7.99	9.20	11.81	15.70	15.70
Interconnection Wiring						
Core / Cable Size	3+E / 1.5	3+E / 1.5	3+E / 1.5	3+E / 1.5	3+E / 1.5	3+E / 1.5
Piping Connections	Liquid / Gas	1/4 (6.4) / 3/8 (9.5)	1/4 (6.4) / 3/8 (9.5)	1/4 (6.4) / 1/2 (12.7)	1/4 (6.4) / 1/2 (12.7)	1/4 (6.4) / 1/2 (12.7)
Pipework						
Maximum Vertical Rise	12	12	12	20	20	20
Precharged to	10	10	10	10	10	10
Additional charge	20	20	20	20	20	20
Holding charge	0.55	0.55	0.70	0.90	1.15	1.15
Sound Pressure (Cooling)	Nominal	46	46	47	49	52
Sound Pressure (Heating)	Nominal	47	47	48	49	52
Sound Power (Cooling)	dBA	61	61	62	63	66
Operating Range (Cooling)	Min / Max	-10 / 48	-10 / 48	-10 / 48	-10 / 48	-10 / 48
Operating Range (Heating)	Min / Max	-15 / 18	-15 / 18	-15 / 18	-15 / 18	-15 / 18
Air Flow Rate (Cooling)	Nominal	27.6	27.6	28.2	41.0	45.5
Meets ETL criteria	●	●	●	●	●	●
Indoor Unit Trade Price	£158.00	£177.00	£199.00	£323.00	£331.00	£440.00
Condensing Unit Trade Price	£472.00	£503.00	£584.00	£760.00	£810.00	£1,164.00
Total System Price	£630.00	£680.00	£783.00	£1,083.00	£1,141.00	£1,604.00

Notes & Features:

- Class 20-50 fan coils are supplied with IR remote controller ARC480A78; class 60&71 fan coils use IR remote controller ARC480A53
- Wifi adaptor included as standard
- Whisper quiet in operation down to 19 dBA with 'Silent Mode' operation
- The unit's compact dimensions makes it ideal for renovation projects, especially for above door installation
- Space saving contemporary wall mounted design
- Can be connected to MXM & MWXM multi split systems (sizes 20-35)



FTXF-F / RXF-F/D9

Wall Mounted - Residential



FTXF20-50F



Now comes
with Wi-Fi as
standard



ARC470A



RXF20-50F

Accessories:

Accessory Ref	Description	Trade Price
BRC073	Optional wired remote controller BRC1E53A style - Connection cable required.	£119.00
KRP980A1	Interface adaptor for wired remote controller BRC073 - for class 20-50	£73.00
BRCW901A03	3m connection cable for BRC073	£17.00
BRCW901A08	8m connection cable for BRC073	£30.00
K.CWB90-2	Condensing unit bracket - up to size 71, max weight 90kg of ODU	£51.00
K.DT1	Condensate drip tray for use with Split ODU - tray width 800mm	£79.00
K.CG5	Condensing unit guard size 20-42	£328.00
K.COM	Condensing unit guard size 50-71	£453.00

NET price - only available on ProShop

Indoor Units	FTXF20F	FTXF25F	FTXF35F	FTXF42F	FTXF50F	FTXF60F	FTXF71F
Capacity							
UK Total Cooling	1.95	2.44	3.22	4.07	4.89	5.86	6.93
UK Sensible Cooling	1.69	1.94	2.35	2.97	3.42	4.00	4.73
Nominal Cooling	2.00	2.50	3.30	4.20	5.00	6.00	7.10
Nominal Heating	2.00	2.80	3.80	4.80	5.80	6.80	8.20
Seasonal Efficiency (EN14825) COOLING	A++	A++	A++	A++	A++	A++	A
PDesign	3.50	2.50	2.00	2.00	2.00	2.00	2.00
SEER	6.50	6.50	6.50	6.50	6.50	6.50	6.50
Annual Energy Consumption kWh	108	135	188	226	269	342	483
Seasonal Efficiency (EN14825) HEATING	A+	A+	A+	A+	A+	A+	A
PDesign	2.20	2.40	2.60	3.30	4.60	4.80	6.20
SCOP	4.20	4.20	4.20	4.20	4.20	4.06	3.81
Annual Energy Consumption kWh	733	801	867	1075	1297	1654	2275
Air Flow Rate (Cooling)	9.8 / 8.0 / 6.0 / 4.3	10.0 / 8.0 / 6.2 / 4.3	11.5 / 8.0 / 6.4 / 4.4	12.6 / 9.0 / 6.9 / 4.9	16.8 / 14.4 / 11.9 / 10.5	17.3 / 14.8 / 12.2 / 10.7	17.3 / 14.8 / 12.2 / 10.7
Dimensions							
Height	286	286	286	286	286	295	295
Width	770	770	770	770	770	990	990
Depth	225	225	225	255	225	263	263
Weight	8	8	8.50	9	13.50	13.50	13.50
Sound Pressure (Cooling)	39 / 33 / 25 / 20	40 / 33 / 26 / 20	43 / 34 / 27 / 20	45 / 36 / 30 / 22	43 / 39 / 34 / 31	45 / 41 / 36 / 33	46 / 42 / 37 / 34
Sound Pressure (Heating)	39 / 34 / 28 / 21	40 / 34 / 28 / 21	40 / 35 / 29 / 21	44 / 34 / 28 / 22	42 / 38 / 33 / 30	44 / 40 / 35 / 32	45 / 41 / 36 / 33
Sound Power (Cooling)	53	54	54	59	59	60	62
Outdoor Units	RXF20F	RXF25F	RXF35F	RXF42F	RXF50F	RXF60D9	RXF71D9
Dimensions							
Height x Width x Depth	556 x 740 x 343	556 x 740 x 343	556 x 740 x 343	556 x 740 x 343	610 x 923 x 367	734 x 870 x 373	734 x 870 x 373
Weight	24	24	24	28	40	50	50
Electrical Details							
Power Supply	1ph	1ph	1ph	1ph	1ph	1ph	1ph
Maximum Input Current (MCA)	8.06	8.14	9.36	9.44	10.43	15.70	15.70
Max Fuse Size	16	16	16	16	16	20	20
Core / Cable size	3+E / 1.5	3+E / 1.5	3+E / 1.5	3+E / 1.5	3+E / 1.5	3+E / 1.5	3+E / 1.5
Liquid / Gas	1/4 (6.4) / 3/8 (9.5)	1/4 (6.4) / 3/8 (9.5)	1/4 (6.4) / 3/8 (9.5)	1/4 (6.4) / 3/8 (9.5)	1/4 (6.4) / 1/2 (12.7)	1/4 (6.4) / 1/2 (12.7)	1/4 (6.4) / 1/2 (12.7)
Pipework							
Maximum Length	20	20	20	20	30	30	30
Maximum Vertical Rise	12	12	12	12	20	20	20
Precharged to	10	10	10	10	10	10	10
Additional Charge	20	20	20	20	20	20	20
Holding Charge	0.42	0.42	0.55	0.75	0.80	1.15	1.15
Sound Pressure (Cooling)	20-50 High / 60-71 Nominal	20-50 High / 60-71 Nominal	20-50 High / 60-71 Nominal	20-50 High / 60-71 Nominal	20-50 High / 60-71 Nominal	20-50 High / 60-71 Nominal	20-50 High / 60-71 Nominal
Sound Pressure (Heating)	20-50 High / 60-71 Nominal	20-50 High / 60-71 Nominal	20-50 High / 60-71 Nominal	20-50 High / 60-71 Nominal	20-50 High / 60-71 Nominal	20-50 High / 60-71 Nominal	20-50 High / 60-71 Nominal
Sound Power (Cooling)	47	47	48	48	49	49	52
Operating Range (Cooling)	Min / Max	Min / Max	Min / Max	Min / Max	Min / Max	Min / Max	Min / Max
Operating Range (Heating)	-10 / 48	-10 / 48	-10 / 48	-10 / 48	-10 / 48	-10 / 48	-10 / 48
Air Flow Rate (Cooling)	-15 / 18	-15 / 18	-15 / 18	-15 / 18	-15 / 18	-15 / 18	-15 / 18
Trade Fan Coil Price	£93.00	£99.00	£116.00	£138.00	£169.00	£199.00	£253.00
Trade Condensing Unit Price	£277.00	£297.00	£344.00	£391.00	£431.00	£508.00	£646.00
Total System Price	£370.00	£396.00	£460.00	£529.00	£600.00	£707.00	£899.00

Notes & Features:

- Sizes 20-50 fan coils are supplied with controller ARC480A93, sizes 60 & 71 are supplied with controller ARC470A
- Sizes 20-50 come with built in wifi, sizes 60 & 71 come with a wifi adaptor as standard
- Whisper-quiet in operation down to 20 dBA
- The unit's compact dimensions make it ideal for renovation projects, especially for above door installation
- Space-saving contemporary wall-mounted design

