



Ethera with nanoe™ X technology

1. Air quality

- nanoe™ X technology with the benefits of hydroxyl radicals (Generator Mark 3)
- Cleaning and drying the indoor unit with nanoe™

2. Smart control

- Built-in Wi-Fi with easier and faster set-up
- Compatible with Google Assistant and Amazon Alexa


3. High efficiency

- Top class energy efficiency up to A+++ in heating and cooling


4. Ultimate comfort

- Aerowings 2.0, end-to-end vanes enhance comfortable air flow
- Super quiet ambient

5. Stylish and monolithic design

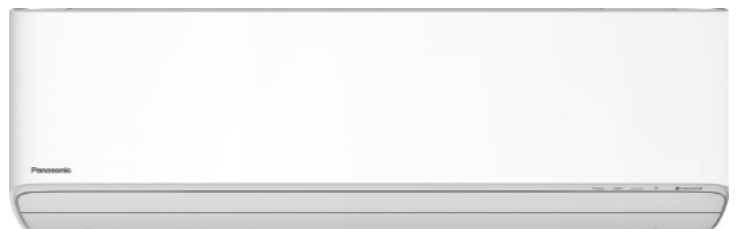

ETHEREA





Ethera with nanoe™ X technology

1. Air quality

- nanoe™ X technology with the benefits of hydroxyl radicals (Generator Mark 3)
- Cleaning and drying the indoor unit with nanoe™

2. Smart control

- Built-in Wi-Fi with easier and faster set-up
- Compatible with Google Assistant and Amazon Alexa


3. High efficiency

- Top class energy efficiency up to A+++ in heating and cooling

4. Ultimate comfort

- Aerowings 2.0, end-to-end vanes enhance comfortable air flow
- Super quiet ambient

5. Stylish and monolithic design

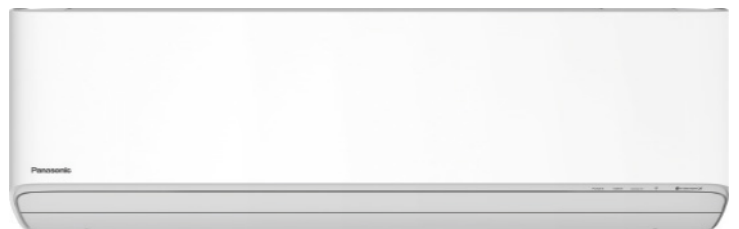

ETHEREA



Etherea with nanoe™ X technology

Etherea: a very welcome addition to your home


A smart solution to keep your home clean, comfortable and welcoming

The smart, Etherea comes with nanoe™ X technology with the benefits of hydroxyl radicals. With advanced control options, class-leading performance, a stylish design and intelligent features, Etherea is designed to make your home comfortable, clean and the ideal place to be.

Available in 3 colors

Built-in new nanoe X Generator Mark 3

Built-in Wi-Fi

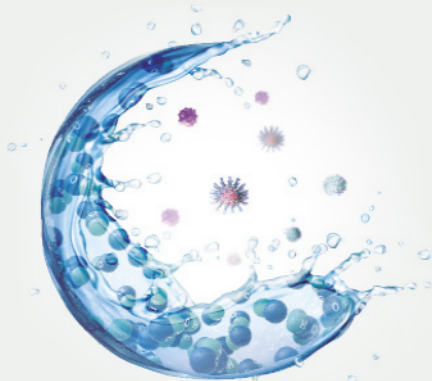


Bringing nature's balance indoors

nanoe™ X, technology with the benefits of hydroxyl radicals

Abundant in nature, hydroxyl radicals have the capacity to inhibit pollutants. nanoe™ X, technology can bring these incredible benefits indoors so that hard surfaces, soft furnishings, and the indoor environment can be a cleaner and pleasant place to be.

7 effects of nanoe™ X – Panasonic unique technology

- 1. Capacity to inhibit 5 types of pollutants:** Bacteria and viruses - Mould - Allergens - Pollen - Hazardous substances
- 2. Deodorises:** Odours
- 3. Moisturises:** Skin and hair

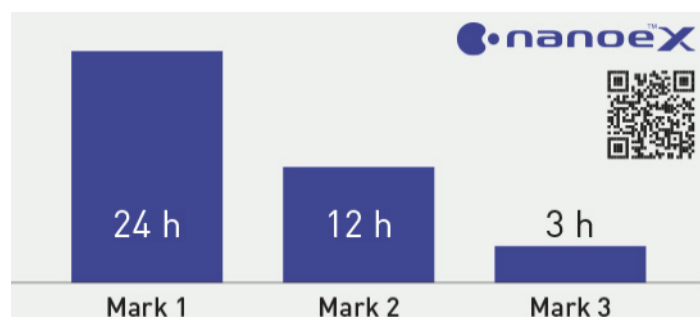


Comparison of time required to inhibit 99% of cedar pollen

The result of nanoe X Generator Mark 3.

Inhibits pollen in 1/4 the time of nanoe X Generator Mark 2*.

* Effect after 3 hours in a test space of approx. 24m³. The figures are not the results of testing in an actual operating space.

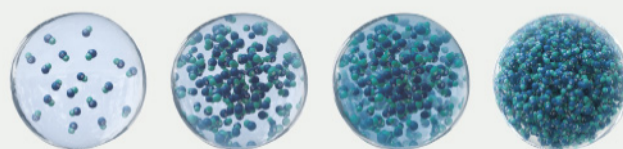

x10

x20

x100

The evolution of nanoe™

The decisive factor for the cleaning effects is hydroxyl radical amount, which contained in nanoe™ X particles.

- 1. nanoe™ (original). 480 billion**
- 2. nanoe X Generator Mark 1. 4,8 trillion**
- 3. nanoe X Generator Mark 2. 9,6 trillion**
- 4. nanoe X Generator Mark 3. 48 trillion**

Etherea with nanoe™ X technology

Etherea: a very welcome addition to your home


A smart solution to keep your home clean, comfortable and welcoming

The smart, Etherea comes with nanoe™ X technology with the benefits of hydroxyl radicals. With advanced control options, class-leading performance, a stylish design and intelligent features, Etherea is designed to make your home comfortable, clean and the ideal place to be.

Available in 3 colors

Built-in new nanoe X Generator Mark 3

Built-in Wi-Fi

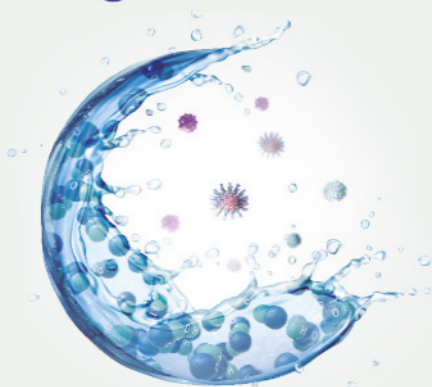


Bringing nature's balance indoors

nanoe™ X, technology with the benefits of hydroxyl radicals

Abundant in nature, hydroxyl radicals have the capacity to inhibit pollutants. nanoe™ X, technology can bring these incredible benefits indoors so that hard surfaces, soft furnishings, and the indoor environment can be a cleaner and pleasant place to be.

7 effects of nanoe™ X – Panasonic unique technology

- 1. Capacity to inhibit 5 types of pollutants:** Bacteria and viruses - Mould - Allergens - Pollen - Hazardous substances
- 2. Deodorises:** Odours
- 3. Moisturises:** Skin and hair

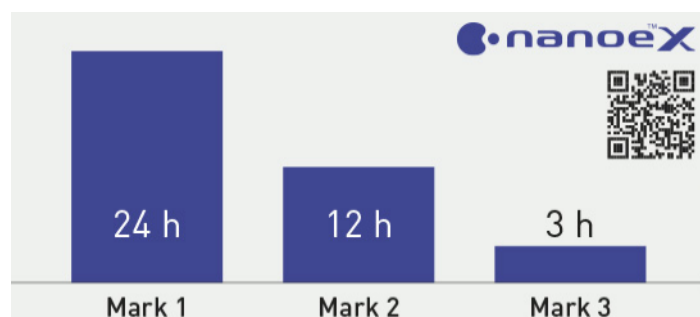


Comparison of time required to inhibit 99% of cedar pollen

The result of nanoe X Generator Mark 3.

Inhibits pollen in 1/4 the time of nanoe X Generator Mark 2*.

* Effect after 3 hours in a test space of approx. 24m³. The figures are not the results of testing in an actual operating space.

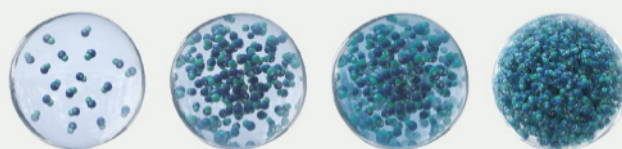

x10

x20

x100

The evolution of nanoe™

The decisive factor for the cleaning effects is hydroxyl radical amount, which contained in nanoe™ X particles.

- 1. nanoe™ (original). 480 billion**
- 2. nanoe X Generator Mark 1. 4,8 trillion**
- 3. nanoe X Generator Mark 2. 9,6 trillion**
- 4. nanoe X Generator Mark 3. 48 trillion**

Technology for the ultimate comfort

Licensed in VDI 6022

Certification of a HVAC system under VDI 6022 guarantees that the system fulfills the market's strictest hygiene requirements.

VDI 6022 – Part 5 ¹⁾ Certification

Avoidance of allergenic exposure

Inhibits a wide range of harmful bacteria, viruses, mould, pollen and allergens.


a. Pollen. b. Mould. c. Allergens

VDI 6022 – Part 1 ¹⁾ & 1.1 ²⁾ Certification

Ventilation and indoor-air quality

Panasonic nanoe™ X technology improving indoor air quality.

1. Certification mark only valid for Generator Mark 3. 2. Certification mark only valid for Generator Mark 2 and Mark 3.

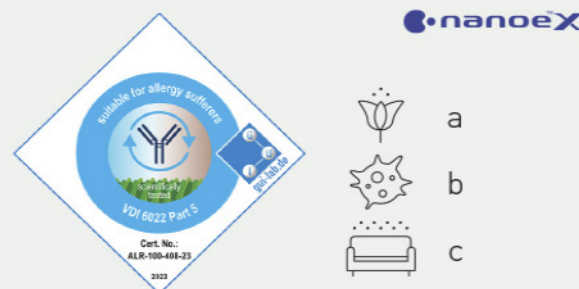

Inside cleaning

The inside cleaning operation acts to clean the inside of indoor unit. It uses nanoe™ X technology that can inhibit certain adhered bacteria, viruses, and mould on the filter, evaporator and air outlet and filter up to 99%.


New cross flow fan is coated to prevent dust adhered on its surfaces and can be effective against certain bacteria and mould.

Proven prevents dust adhered 62,5%* compare with non-coating

The amount of dust or mould may change depending on the usage frequency and environment.

* Based on Panasonic internal testing result.

a: Without coating: Adhered dust - b: With anti-static coating: Maintain cleanliness - c: Without coating cross flow fan - d: Coated cross flow fan.

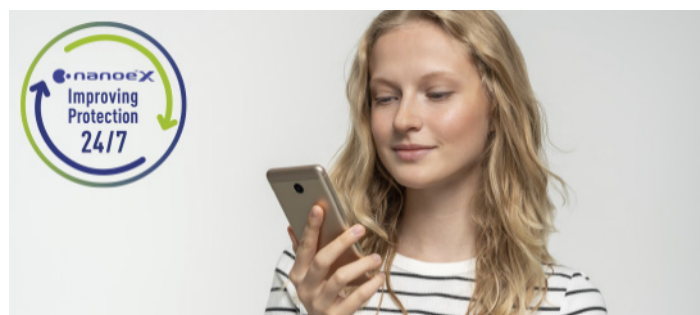

nanoe™ X: improving protection 24/7

Give the air conditioning the strength to increase the protection at home with nanoe™ X technology and convenient control via the Panasonic Comfort Cloud App.

nanoe™ X works together with heating or cooling function when you are at home and can work independently when you are away.



Technology for the ultimate comfort

Licensed in VDI 6022

Certification of a HVAC system under VDI 6022 guarantees that the system fulfills the market's strictest hygiene requirements.

VDI 6022 – Part 5¹⁾ Certification

Avoidance of allergenic exposure

Inhibits a wide range of harmful bacteria, viruses, mould, pollen and allergens.


a. Pollen. b. Mould. c. Allergens

VDI 6022 – Part 1¹⁾ & 1.1²⁾ Certification

Ventilation and indoor-air quality

Panasonic nanoe™ X technology improving indoor air quality.

1. Certification mark only valid for Generator Mark 3. 2. Certification mark only valid for Generator Mark 2 and Mark 3.

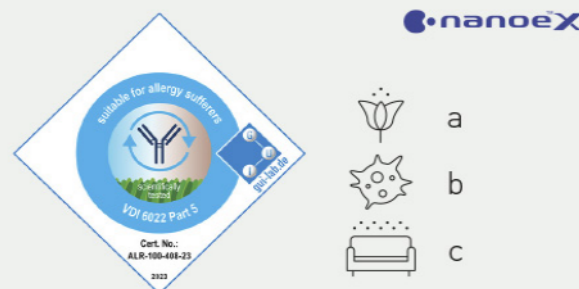

Inside cleaning

The inside cleaning operation acts to clean the inside of indoor unit. It uses nanoe™ X technology that can inhibit certain adhered bacteria, viruses, and mould on the filter, evaporator and air outlet and filter up to 99%.


New cross flow fan is coated to prevent dust adhered on its surfaces and can be effective against certain bacteria and mould.

Proven prevents dust adhered 62,5%* compare with non-coating

The amount of dust or mould may change depending on the usage frequency and environment.

* Based on Panasonic internal testing result.

a: Without coating: Adhered dust - b: With anti-static coating: Maintain cleanliness - c: Without coating cross flow fan - d: Coated cross flow fan.

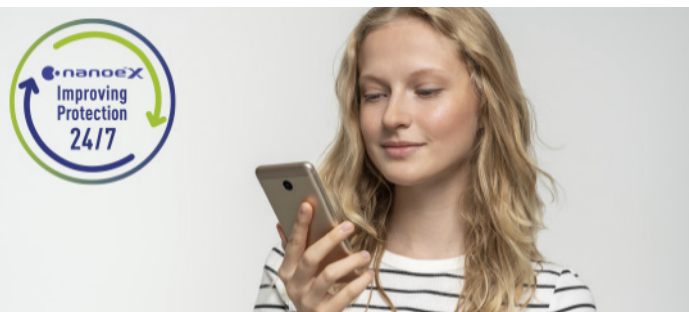

nanoe™ X: improving protection 24/7

Give the air conditioning the strength to increase the protection at home with nanoe™ X technology and convenient control via the Panasonic Comfort Cloud App.

nanoe™ X works together with heating or cooling function when you are at home and can work independently when you are away.



Technology for the ultimate comfort



1

Introducing the Aerowings 2.0 to the Etherea range

Panasonic's Aerowings technology consists of two independent flexible vanes that concentrate air flow to heat or cool a room in the shortest time possible and helps distribute air evenly throughout a room.

1. Aerowings 2.0 has a shower cooling feature which allows air flow to be concentrated evenly towards the ceiling to achieve comfortable cooling across a room, showering gently down into a room rather than one area subject to a continuous icy blast



2

2. For heating, Aerowings 2.0 releases a concentrated air flow downwards to achieve an effect similar to floor heating the air, which rises and fills the room.



Sleek design with easy-to-use remote controller

Panasonic has meticulously designed a new Etherea for a sleek and stylish solution to blend with any interior. Its elegant monolithic design is robust and allows for a high-performance air conditioner, with a large air discharge area to optimise performance.

Sleek design for optimal performance:

- Spatial fit and architectural impression achieved by end-to-end vane
- Large air discharge area and vane size exudes higher performance
- Compact, narrow design fits neatly on the wall
- Simplified, clean surface presents a timeless design



High class, easy-to-use remote control with backlight

The easy-to-use remote controller features an ergonomic design with tapered rear housing for the most comfortable grip. The new controller's intuitive design provides easy operation with five quick access keys for convenient use. The controller also has a minimalist design with the less frequently used keys concealed under a sliding cover.

Technology for the ultimate comfort



1

Introducing the Aerowings 2.0 to the Etherea range

Panasonic's Aerowings technology consists of two independent flexible vanes that concentrate air flow to heat or cool a room in the shortest time possible and helps distribute air evenly throughout a room.

1. Aerowings 2.0 has a shower cooling feature which allows air flow to be concentrated evenly towards the ceiling to achieve comfortable cooling across a room, showering gently down into a room rather than one area subject to a continuous icy blast



2

2. For heating, Aerowings 2.0 releases a concentrated air flow downwards to achieve an effect similar to floor heating the air, which rises and fills the room.



Sleek design with easy-to-use remote controller

Panasonic has meticulously designed a new Etherea for a sleek and stylish solution to blend with any interior. Its elegant monolithic design is robust and allows for a high-performance air conditioner, with a large air discharge area to optimise performance.

Sleek design for optimal performance:

- Spatial fit and architectural impression achieved by end-to-end vane
- Large air discharge area and vane size exudes higher performance
- Compact, narrow design fits neatly on the wall
- Simplified, clean surface presents a timeless design



High class, easy-to-use remote control with backlight

The easy-to-use remote controller features an ergonomic design with tapered rear housing for the most comfortable grip. The new controller's intuitive design provides easy operation with five quick access keys for convenient use. The controller also has a minimalist design with the less frequently used keys concealed under a sliding cover.

Technology for the ultimate comfort



Highly energy efficient for all your needs

Etherea provides the highest level of comfort in any setting with a low energy cost, creating a pleasant environment without high costs. The air to air technology allows for a highly energy efficient solution to ensure optimal heating and comfort year-round.

Free Multi system

If air conditioning requirements exceed the scope of a single room, Panasonic offers an extensive range of possibilities with a multi split solution.

Up to 5 indoor units with a single outdoor unit.

- Just one compact outdoor unit
- Increased comfort in the house since every room has its own indoor unit for heating or cooling
- Much more powerful than a single split
- More efficient since the units are always operating at full capacity
- You can connect all types of indoor units, such as wall types and consoles, depending on what suits your house best



Technology for the ultimate comfort



Highly energy efficient for all your needs

Etherea provides the highest level of comfort in any setting with a low energy cost, creating a pleasant environment without high costs. The air to air technology allows for a highly energy efficient solution to ensure optimal heating and comfort year-round.

Free Multi system

If air conditioning requirements exceed the scope of a single room, Panasonic offers an extensive range of possibilities with a multi split solution.

Up to 5 indoor units with a single outdoor unit.

- Just one compact outdoor unit
- Increased comfort in the house since every room has its own indoor unit for heating or cooling
- Much more powerful than a single split
- More efficient since the units are always operating at full capacity
- You can connect all types of indoor units, such as wall types and consoles, depending on what suits your house best



Smart & intuitive controls for Etherea



Panasonic Comfort Cloud App

Whether you are at home, at the office or running a business, Panasonic Comfort Cloud App put total control of your indoor air quality at your fingertips.

Remote control: Control and monitor your air conditioners anytime, anywhere

Monitor energy consumption: Check the energy consumption of each individual unit across different time intervals by comparing the energy usage patterns to maximise energy savings

nanoe™ X: improving protection 24/7*: Switch on nanoe™ X mode with cooling OFF / ON and see the nanoe™ X coverage in your space through a simulation.

* Only for units compatible with nanoe™ X function.

Voice Control. Words do more than actions

Boundless control and hands-free help to access all the features of your air-to-air heat pump.

Maximising your comfort is now a breeze with our connected air conditioners using the Panasonic Comfort Cloud App and voice control.


* Google, Android, Google Play and Google Home are trademarks of Google LLC. Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates. Availability of Voice Assistant services varies depending on Country and Language.



Domestic AirCon Quick Selector

This user-friendly online tool for our domestic range allows to choose the best split or multi-split system for each project needs and get the specifications of that particular application.

Configure in a few steps your multi split system with our online tool and see the capacity of all possible combinations

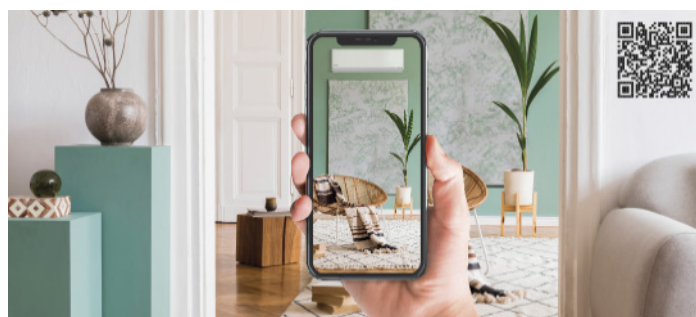

AR Heat Pump Viewer

Interested to see how a Panasonic air conditioner looks in your home?

Try the new Panasonic AR projector, utilising augmented reality!

Smart & intuitive controls for Etherea



Panasonic Comfort Cloud App

Whether you are at home, at the office or running a business, Panasonic Comfort Cloud App put total control of your indoor air quality at your fingertips.

Remote control: Control and monitor your air conditioners anytime, anywhere

Monitor energy consumption: Check the energy consumption of each individual unit across different time intervals by comparing the energy usage patterns to maximise energy savings

nanoe™ X: improving protection 24/7*: Switch on nanoe™ X mode with cooling OFF / ON and see the nanoe™ X coverage in your space through a simulation.

* Only for units compatible with nanoe™ X function.

Voice Control. Words do more than actions

Boundless control and hands-free help to access all the features of your air-to-air heat pump.

Maximising your comfort is now a breeze with our connected air conditioners using the Panasonic Comfort Cloud App and voice control.


* Google, Android, Google Play and Google Home are trademarks of Google LLC. Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates. Availability of Voice Assistant services varies depending on Country and Language.



Domestic AirCon Quick Selector

This user-friendly online tool for our domestic range allows to choose the best split or multi-split system for each project needs and get the specifications of that particular application.

Configure in a few steps your multi split system with our online tool and see the capacity of all possible combinations

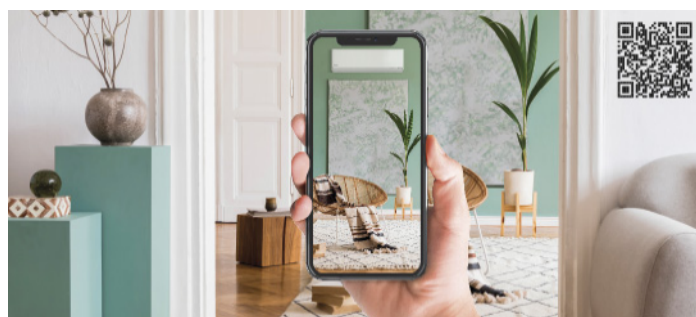

AR Heat Pump Viewer

Interested to see how a Panasonic air conditioner looks in your home?

Try the new Panasonic AR projector, utilising augmented reality!

Product and accessories



1

2

3

4

5

Accessories	
1. CZ-RD517C	Wired remote controller for wall-mounted and floor console
2. CZ-CAPRA1	RAC interface adapter for integration into S-Link
3. PAW-AZAC-KNX-1	KNX interface. Can be used with all models which have a CN-CNT connector (Airzone)
4. PAW-AZAC-MBS-1	Modbus interface. Can be used with all models which have a CN-CNT connector (Airzone)
5. PAW-AZAC-BAC-1	BACnet interface. Can be used with all models which have a CN-CNT connector (Airzone)

Product and accessories



1

2

3

4

5

Accessories	
1. CZ-RD517C	Wired remote controller for wall-mounted and floor console
2. CZ-CAPRA1	RAC interface adapter for integration into S-Link
3. PAW-AZAC-KNX-1	KNX interface. Can be used with all models which have a CN-CNT connector (Airzone)
4. PAW-AZAC-MBS-1	Modbus interface. Can be used with all models which have a CN-CNT connector (Airzone)
5. PAW-AZAC-BAC-1	BACnet interface. Can be used with all models which have a CN-CNT connector (Airzone)

Etherea with nanoe™ X matt white R32


Etherea with nanoe™ X Pure White Matt R32		SINGLE PHASE					
		2.1 kW	2.5 kW	3.5 kW	4.2 kW	5.0 kW	7.1 kW
Cooling capacity (Min)	kW	0,75	0,85	0,85	0,85	0,98	0,98
Input power heating (Min)	kW	0,16	0,16	0,18	0,19	0,23	0,40
COP (Max) (1)	W/W	4,26	4,07	3,77	3,66	3,35	3,29
COP (Min) (1)	W/W	4,69	5,00	4,44	4,21	4,26	2,45
Heating capacity (Max)	kW	4,00	4,80	5,50	6,80	8,00	10,20
Heating capacity (Min)	kW	0,75	0,80	0,80	0,80	0,98	0,98
Input power cooling (Max)	kW	0,67	0,90	1,16	1,57	1,90	3,00
Input power cooling (Min)	kW	0,16	0,17	0,20	0,24	0,25	0,42
EER (Max) (1)	W/W	3,96	3,89	3,62	3,18	3,16	2,83
EER (Min) (1)	W/W	4,69	5,00	4,25	3,62	3,92	2,33
Cooling capacity (Max)	kW	2,65	3,50	4,20	5,00	6,00	8,50
Input power heating (Max)	kW	0,94	1,18	1,46	1,86	2,39	3,10
Operating range (Heat - Max)	°C	24	24	24	24	24	24
Operating range (Heat - Min)	°C	-15	-15	-15	-15	-15	-15
Operating range (Cool - Max)	°C	43	43	43	43	43	43
Elevation difference (in/out) (6)	m	15	15	15	15	15	20
Outdoor dimension (Depth) (5)	mm	289	289	289	289	320	320
Outdoor dimension (Width) (5)	mm	780	780	780	780	875	875
Outdoor dimension (Height) (5)	mm	542	542	542	542	695	695
Outdoor sound pressure (Heat -Hi) (4)	dB(A)	46	47	50	51	47	54
Outdoor unit		CU-Z20XKE	CU-Z25XKE	CU-Z35XKE	CU-Z42XKE	CU-Z50XKE	CU-Z71XKE
nanoe X Generator		Mark 2	Mark 2	Mark 2	Mark 2	Mark 2	Mark 2
Outdoor air flow (Heat)	m³/min	26,7	27,2	30,6	30,9	36,9	45,8
Outdoor air flow (Cool)	m³/min	27,4	28,7	29,8	29,8	39,8	44,7
Indoor unit		CS-Z20XKEW	CS-Z25XKEW	CS-Z35XKEW	CS-Z42XKEW	CS-Z50XKEW	CS-Z71XKEW
Indoor sound pressure (Heat -Q-Lo) (4)	dB(A)	19	19	19	29	30	30
Indoor sound pressure (Heat -Lo) (4)	dB(A)	25	27	33	35	37	38
Indoor sound pressure (Heat -Hi) (4)	dB(A)	38	41	43	43	44	47
Indoor sound pressure (Cool -Q-Lo) (4)	dB(A)	19	19	19	25	30	30
Indoor sound pressure (Cool -Lo) (4)	dB(A)	24	25	28	31	37	38
Moisture removal volume	L/h	1,3	1,5	2,0	2,4	2,8	4,1
Indoor air flow (Heat)	m³/min	13,0	14,1	14,7	15,4	19,1	19,9
Indoor air flow (Cool)	m³/min	11,7	12,7	12,7	14,4	17,4	19,0
Indoor connection indoor / outdoor	mm²	4 x 1,5	4 x 1,5	4 x 1,5	4 x 1,5	4 x 2,5	4 x 2,5
Indoor power source	V	230	230	230	230	230	230
Annual energy consumption heating (3)	kWh/a	613	646	754	1200	1225	1833
Annual energy consumption cooling (3)	kWh/a	91,00	93,00	129,00	210,00	206,00	382,00
Input power cooling (Nominal)	kW	0,45	0,51	0,85	1,24	1,36	2,24
Pdesign (cooling)	kW	2,1	2,5	3,5	4,2	5	7,1
SEER (2)		8,10 A++	9,40 A+++	9,50 A+++	7,00 A++	8,50 A+++	6,50 A++
Outdoor net weight	kg	25	27	30	30	40	50
Outdoor sound pressure (Cool -Hi) (4)	dB(A)	45	46	48	49	47	52
Indoor net weight	kg	10	10	11	10	12	14
Indoor dimension (Height)	mm	295	295	295	295	295	295
Indoor sound pressure (Cool -Hi) (4)	dB(A)	37	39	42	43	44	47
SCOP (2)		4,80 A++	5,20 A+++	5,20 A+++	4,20 A+	4,80 A++	4,20 A+
Pipe length range	m	3 ~ 15	3 ~ 15	3 ~ 15	3 ~ 15	3 ~ 30	3 ~ 30
Heating capacity at -7°C	kW	2,38	2,80	3,20	4,11	4,80	6,31
Kit		KIT-Z20-XKE	KIT-Z25-XKE	KIT-Z35-XKE	KIT-Z42-XKE	KIT-Z50-XKE	KIT-Z71-XKE
Additional gas amount	g/m	10	10	10	10	15	25
Pipe length for additional gas	m	7,5	7,5	7,5	7,5	7,5	10
Pipe diameter (Gas)	Inch (mm)	3/8 (9,52)	3/8 (9,52)	3/8 (9,52)	1/2 (12,70)	1/2 (12,70)	5/8 (15,88)
Pipe diameter (Liquid)	Inch (mm)	1/4 (6,35)	1/4 (6,35)	1/4 (6,35)	1/4 (6,35)	1/4 (6,35)	1/4 (6,35)
Indoor dimension (Depth)	mm	229	229	229	229	244	244
Indoor dimension (Width)	mm	870	870	870	870	1040	1040
Indoor recommended fuse	A	16	16	16	16	16	20
Refrigerant (R32) / CO2 Eq.	kg / T	0,67 / 0,45	0,80 / 0,54	0,89 / 0,60	0,95 / 0,64	1,13 / 0,76	1,35 / 0,91
EER (Nominal) (1)	W/W	4,56	4,90	4,12	3,39	3,68	3,17
COP (Nominal) (1)	W/W	4,52	4,86	4,44	3,68	4,14	3,69
Heating capacity (Nominal)	kW	2,80	3,40	4,00	5,30	5,80	8,20
Cooling capacity (Nominal)	kW	2,05	2,50	3,50	4,20	5,00	7,10
Operating range (Cool - Min)	°C	-10	-10	-10	-10	-10	-10
Input power heating (Nominal)	kW	0,62	0,70	0,90	1,44	1,40	2,22
Pdesign at -10°C	kW	2,1	2,4	2,8	3,6	4,2	5,5

Etherea with nanoe™ X matt white R32

Etherea with nanoe™ X Pure White Matt R32		SINGLE PHASE					
		2.1 kW	2.5 kW	3.5 kW	4.2 kW	5.0 kW	7.1 kW
Cooling capacity (Min)	kW	0,75	0,85	0,85	0,85	0,98	0,98
Input power heating (Min)	kW	0,16	0,16	0,18	0,19	0,23	0,40
COP (Max) (1)	W/W	4,26	4,07	3,77	3,66	3,35	3,29
COP (Min) (1)	W/W	4,69	5,00	4,44	4,21	4,26	2,45
Heating capacity (Max)	kW	4,00	4,80	5,50	6,80	8,00	10,20
Heating capacity (Min)	kW	0,75	0,80	0,80	0,80	0,98	0,98
Input power cooling (Max)	kW	0,67	0,90	1,16	1,57	1,90	3,00
Input power cooling (Min)	kW	0,16	0,17	0,20	0,24	0,25	0,42
EER (Max) (1)	W/W	3,96	3,89	3,62	3,18	3,16	2,83
EER (Min) (1)	W/W	4,69	5,00	4,25	3,62	3,92	2,33
Cooling capacity (Max)	kW	2,65	3,50	4,20	5,00	6,00	8,50
Input power heating (Max)	kW	0,94	1,18	1,46	1,86	2,39	3,10
Operating range (Heat - Max)	°C	24	24	24	24	24	24
Operating range (Heat - Min)	°C	-15	-15	-15	-15	-15	-15
Operating range (Cool - Max)	°C	43	43	43	43	43	43
Elevation difference (in/out) (6)	m	15	15	15	15	15	20
Outdoor dimension (Depth) (5)	mm	289	289	289	289	320	320
Outdoor dimension (Width) (5)	mm	780	780	780	780	875	875
Outdoor dimension (Height) (5)	mm	542	542	542	542	695	695
Outdoor sound pressure (Heat -Hi) (4)	dB(A)	46	47	50	51	47	54
Outdoor unit		CU-Z20XKE	CU-Z25XKE	CU-Z35XKE	CU-Z42XKE	CU-Z50XKE	CU-Z71XKE
nanoe X Generator		Mark 2	Mark 2	Mark 2	Mark 2	Mark 2	Mark 2
Outdoor air flow (Heat)	m³/min	26,7	27,2	30,6	30,9	36,9	45,8
Outdoor air flow (Cool)	m³/min	27,4	28,7	29,8	29,8	39,8	44,7
Indoor unit		CS-Z20XKEW	CS-Z25XKEW	CS-Z35XKEW	CS-Z42XKEW	CS-Z50XKEW	CS-Z71XKEW
Indoor sound pressure (Heat -Q-Lo) (4)	dB(A)	19	19	19	29	30	30
Indoor sound pressure (Heat -Lo) (4)	dB(A)	25	27	33	35	37	38
Indoor sound pressure (Heat -Hi) (4)	dB(A)	38	41	43	43	44	47
Indoor sound pressure (Cool -Q-Lo) (4)	dB(A)	19	19	19	25	30	30
Indoor sound pressure (Cool -Lo) (4)	dB(A)	24	25	28	31	37	38
Moisture removal volume	L/h	1,3	1,5	2,0	2,4	2,8	4,1
Indoor air flow (Heat)	m³/min	13,0	14,1	14,7	15,4	19,1	19,9
Indoor air flow (Cool)	m³/min	11,7	12,7	12,7	14,4	17,4	19,0
Indoor connection indoor / outdoor	mm²	4 x 1,5	4 x 1,5	4 x 1,5	4 x 1,5	4 x 2,5	4 x 2,5
Indoor power source	V	230	230	230	230	230	230
Annual energy consumption heating (3)	kWh/a	613	646	754	1200	1225	1833
Annual energy consumption cooling (3)	kWh/a	91,00	93,00	129,00	210,00	206,00	382,00
Input power cooling (Nominal)	kW	0,45	0,51	0,85	1,24	1,36	2,24
Pdesign (cooling)	kW	2,1	2,5	3,5	4,2	5	7,1
SEER (2)		8,10 A++	9,40 A+++	9,50 A+++	7,00 A++	8,50 A+++	6,50 A++
Outdoor net weight	kg	25	27	30	30	40	50
Outdoor sound pressure (Cool -Hi) (4)	dB(A)	45	46	48	49	47	52
Indoor net weight	kg	10	10	11	10	12	14
Indoor dimension (Height)	mm	295	295	295	295	295	295
Indoor sound pressure (Cool -Hi) (4)	dB(A)	37	39	42	43	44	47
SCOP (2)		4,80 A++	5,20 A+++	5,20 A+++	4,20 A+	4,80 A++	4,20 A+
Pipe length range	m	3 ~ 15	3 ~ 15	3 ~ 15	3 ~ 15	3 ~ 30	3 ~ 30
Heating capacity at -7°C	kW	2,38	2,80	3,20	4,11	4,80	6,31
Kit		KIT-Z20-XKE	KIT-Z25-XKE	KIT-Z35-XKE	KIT-Z42-XKE	KIT-Z50-XKE	KIT-Z71-XKE
Additional gas amount	g/m	10	10	10	10	15	25
Pipe length for additional gas	m	7,5	7,5	7,5	7,5	7,5	10
Pipe diameter (Gas)	Inch (mm)	3/8 (9,52)	3/8 (9,52)	3/8 (9,52)	1/2 (12,70)	1/2 (12,70)	5/8 (15,88)
Pipe diameter (Liquid)	Inch (mm)	1/4 (6,35)	1/4 (6,35)	1/4 (6,35)	1/4 (6,35)	1/4 (6,35)	1/4 (6,35)
Indoor dimension (Depth)	mm	229	229	229	229	244	244
Indoor dimension (Width)	mm	870	870	870	870	1040	1040
Indoor recommended fuse	A	16	16	16	16	16	20
Refrigerant (R32) / CO2 Eq.	kg / T	0,67 / 0,45	0,80 / 0,54	0,89 / 0,60	0,95 / 0,64	1,13 / 0,76	1,35 / 0,91
EER (Nominal) (1)	W/W	4,56	4,90	4,12	3,39	3,68	3,17
COP (Nominal) (1)	W/W	4,52	4,86	4,44	3,68	4,14	3,69
Heating capacity (Nominal)	kW	2,80	3,40	4,00	5,30	5,80	8,20
Cooling capacity (Nominal)	kW	2,05	2,50	3,50	4,20	5,00	7,10
Operating range (Cool - Min)	°C	-10	-10	-10	-10	-10	-10
Input power heating (Nominal)	kW	0,62	0,70	0,90	1,44	1,40	2,22
Pdesign at -10°C	kW	2,1	2,4	2,8	3,6	4,2	5,5

Dimensions


Wall-mounted Etherea (from 1,6 to 4,2 kW)

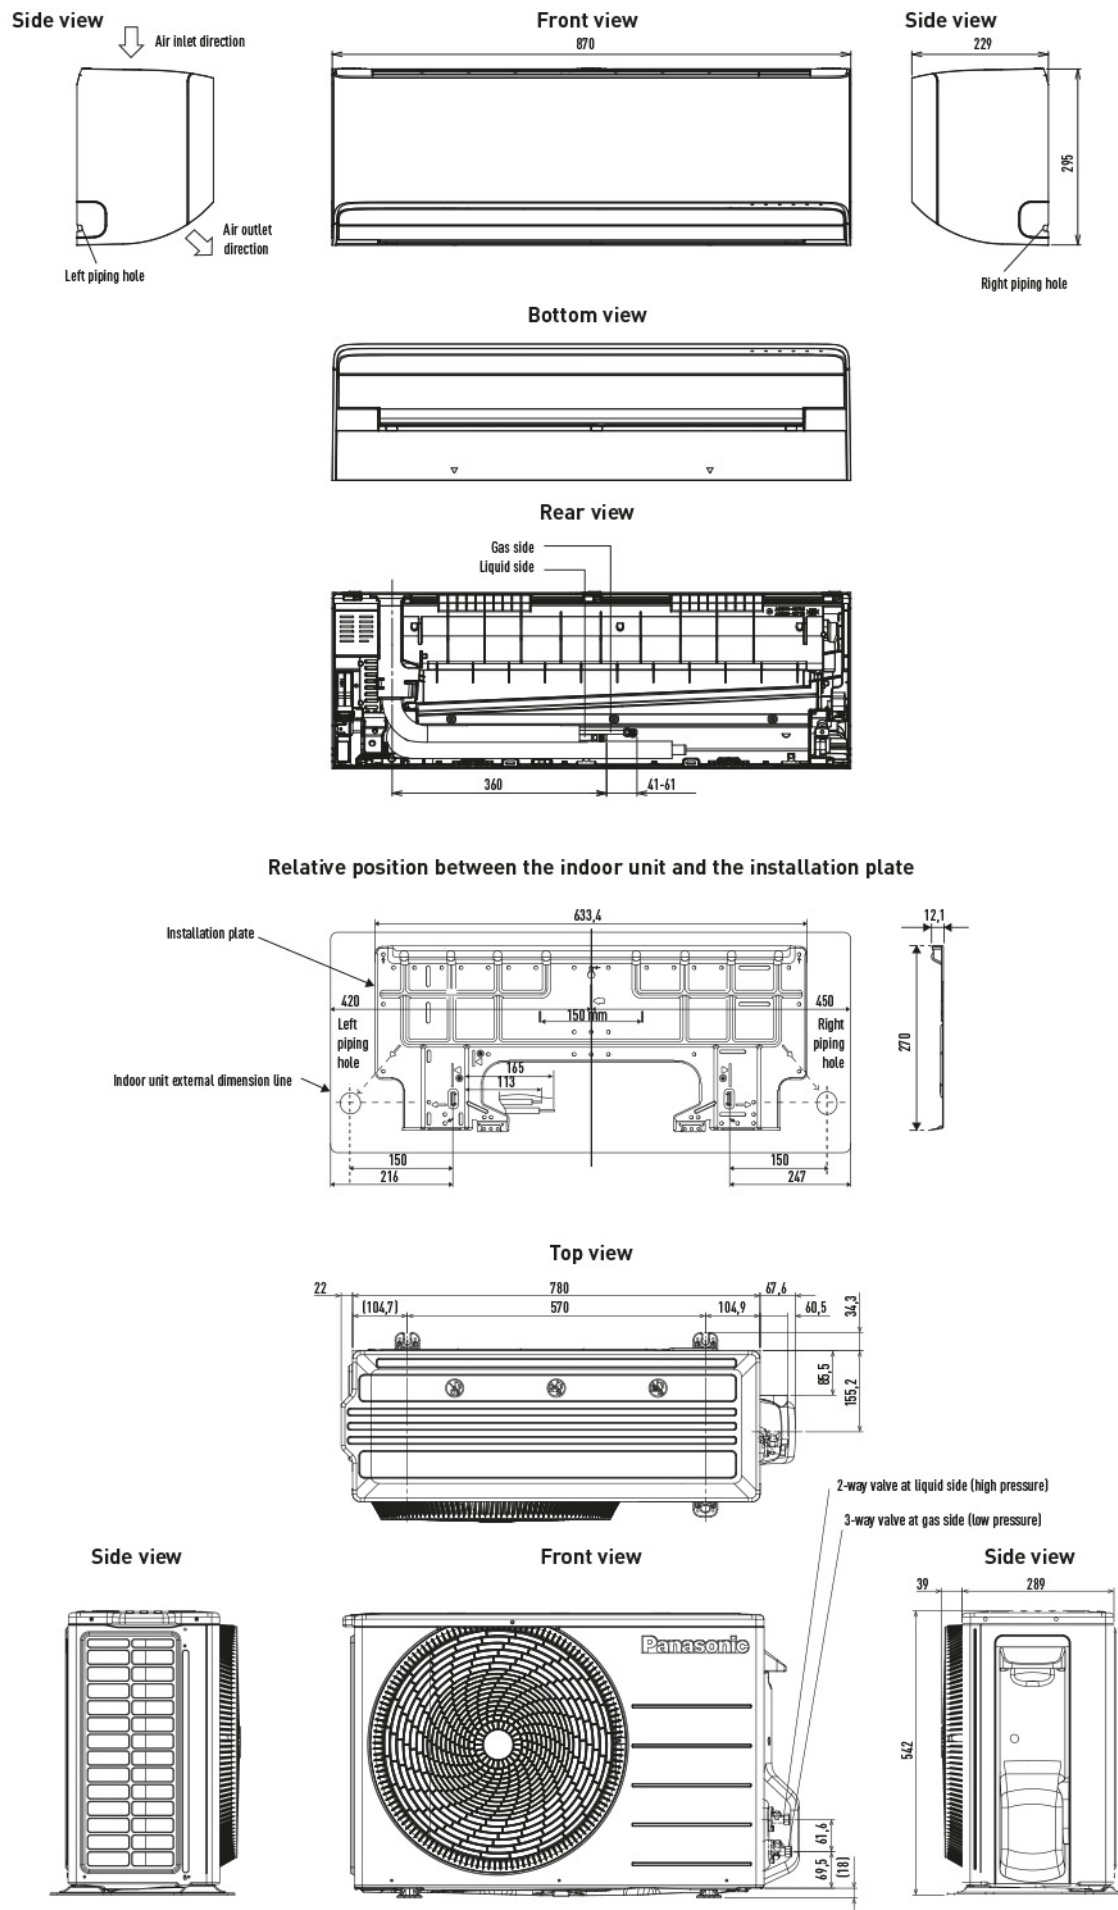

Unit: mm

Dimensions

Wall-mounted Etherea (5,0 and 7,1 kW)

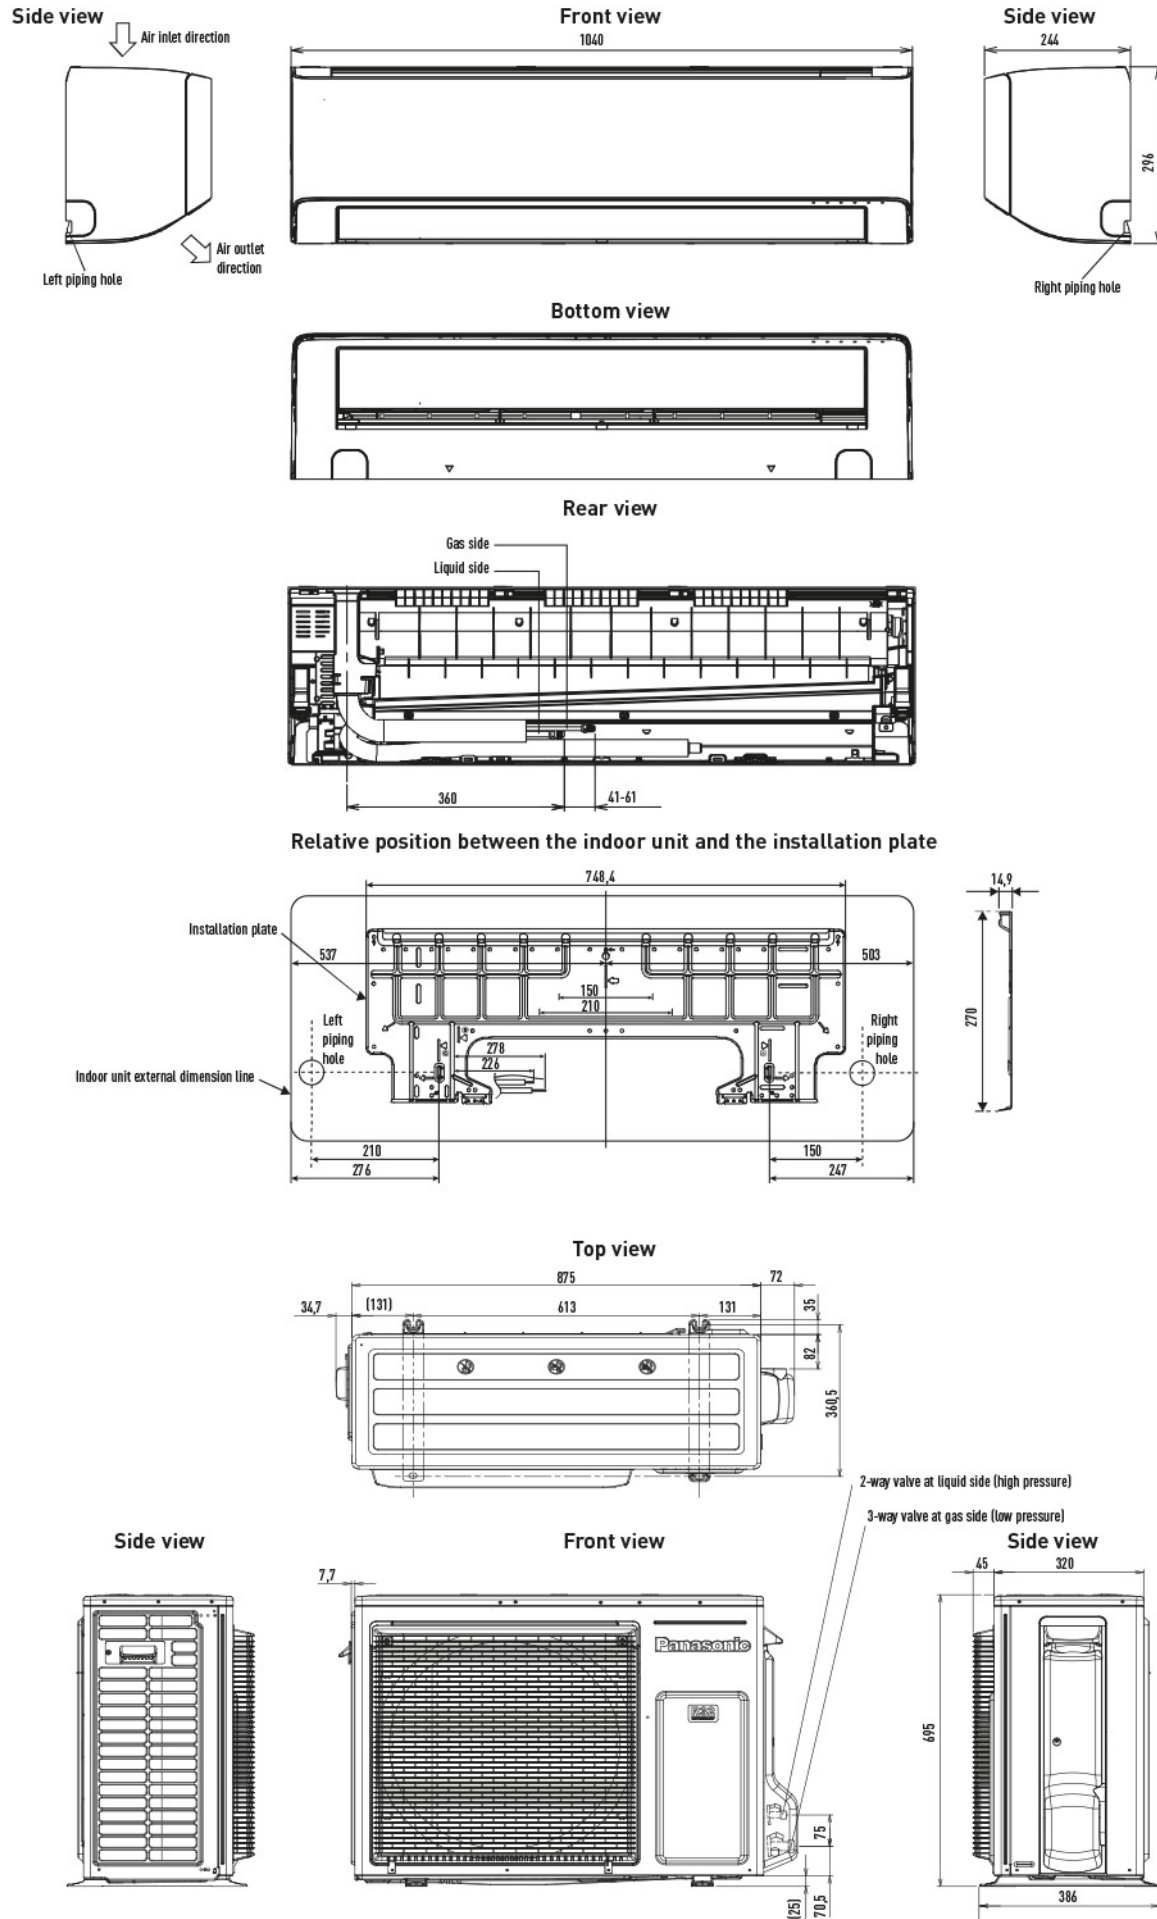


Unit: mm

Wiring diagrams

Wall-mounted Etherea graphite grey, silver and matt white kits 1x1

Indoor unit



Outdoor unit




Attention: Wall-mounted Etherea and TZ super-compact have different connection terminals



Single phase
Power supply
230 V / 50 Hz



Infrared remote
controller (included
in the delivery)



Power supply to indoor or outdoor depending on model, see table.

Single phase

Indoor unit	Power supply	Recommended fuse	Power supply cable	Connection indoor / outdoor	Outdoor unit
CS-XZ20ZKEW-H / CS-XZ20ZKEW / CS-Z20ZKEW	230 V (indoor)	16 A	3 x 1,5 mm²	4 x 1,5 mm²	CU-Z20ZKE
CS-XZ25ZKEW-H / CS-XZ25ZKEW / CS-Z25ZKEW	230 V (indoor)	16 A	3 x 1,5 mm²	4 x 1,5 mm²	CU-Z25ZKE
CS-XZ35ZKEW-H / CS-XZ35ZKEW / CS-Z35ZKEW	230 V (indoor)	16 A	3 x 1,5 mm²	4 x 1,5 mm²	CU-Z35ZKE
CS-XZ42ZKEW-H / — / CS-Z42ZKEW	230 V (indoor)	16 A	3 x 1,5 mm²	4 x 1,5 mm²	CU-Z42ZKE
— / CS-XZ50ZKEW / CS-Z50ZKEW	230 V (indoor)	16 A	3 x 2,5 mm²	4 x 2,5 mm²	CU-Z50ZKE
— / — / CS-Z71ZKEW	230 V (indoor)	20 A	3 x 2,5 mm²	4 x 2,5 mm²	CU-Z71ZKE