

Specification

Fiche

Label

Product Specification



Product Code: TCEMVI-0200LFC


Item Description: 200L CYCLONE IND STANDARD C

C



Capacity	Brand	ERP Type	Item Category Code	Product Group Code	Model
200 L	CYCLONE	IndirectUnvented	Stainless	CYCLONE	INDIRECT
Product Specification					
Actual capacity (Ltr)		194	Thermal insulation		DENSE PU FOAM
Unit weight empty (kg)		41	Cylinder material		LDX 2101
Unit weight full (kg)		241	Outer casing		COATED MILD STEEL
No immersions		1	Coil material		316L STAINLESS STEEL
Immersion spec		3KW@230V	Foam thickness		0
Max mains water pressure (Bar)		10	Operating temp (C)		60
Operating pressure (Bar)		7	Safety valve temp (C)		90
Tested to standard		BS EN 12897:2016	Warranty terms (Year)		1Y
No heat exchangers		1	Heat loss		1.94
Coil 1 rating (kW)		21	Coil 2 rating (kW)		35
Coil 1 surface area (m²)		.67	Coil 2 surface area (m²)		37
Coil 1 max prim pressure (Bar)		3.5	Coil 2 max prim pressure (Bar)		40
Coil 1 resistance (Bar)		.07	Coil 2 resistance (Bar)		39

Dimensions	
A (mm)	1490
B (mm)	540
C (mm)	196
D (mm)	336
E (mm)	516
F (mm)	581
G (mm)	981
H (mm)	1211

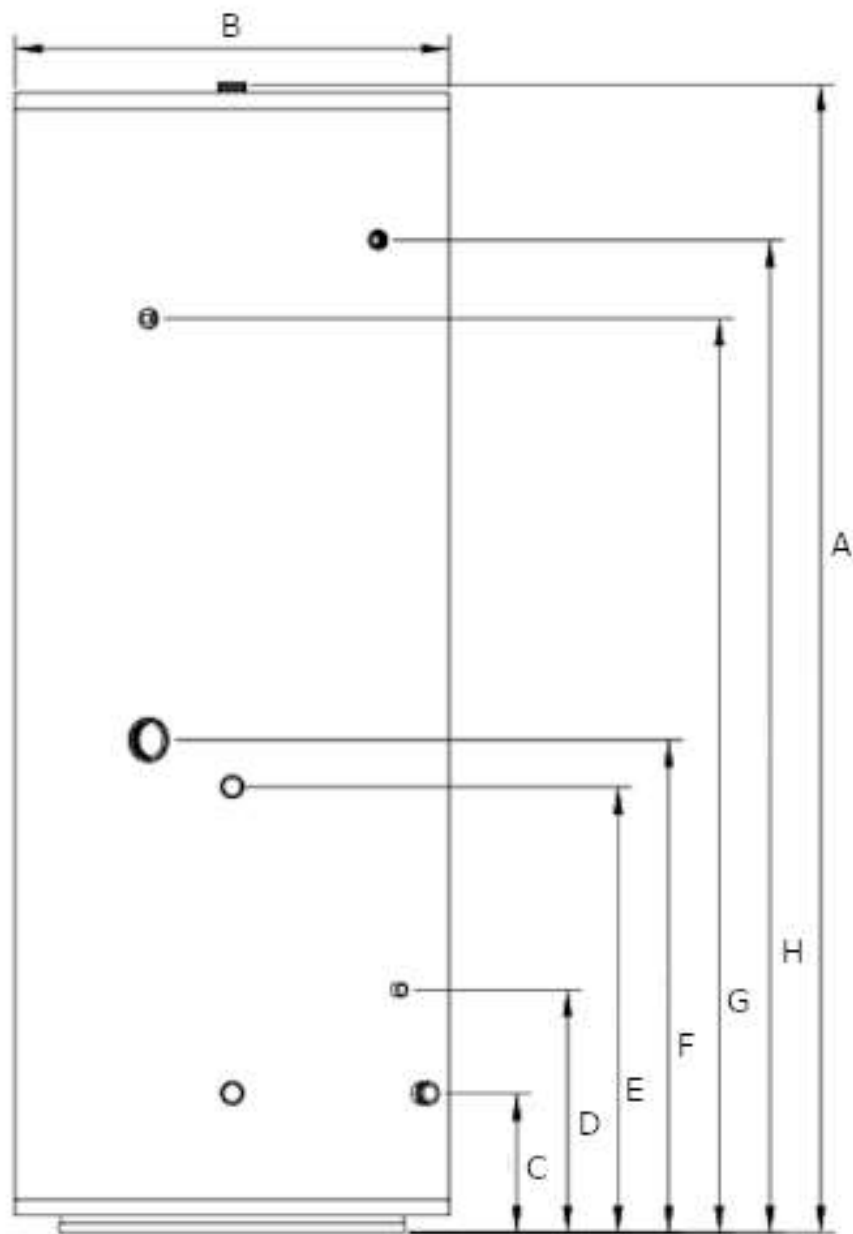

Click or scan here to view the product page:



<https://jouleuk.co.uk/products/cyclone-indirect/>

joule
Manufacturing Excellence

Test Standard: BS EN 12897:2016

Joule UK

4 Valencia Park, Gilcar Way,
Wakefield Europort
Castleford, West Yorkshire
WF105QS, UK

Joule Ireland

Unit 407 NW Business Park,
Cappagh Road, Ballycoolin,
Blanchardstown,
Dublin

