

Panasonic

REFRIGERATION CONDENSING UNITS 2026 / 2027

TOTAL HVAC&R SOLUTION

iCQRE
iCOOL

15^{years}
C₂
refrigeration
anniversary



heating & cooling solutions

iC_QRE
iCOOL

Moving to more sustainable refrigeration solutions – iC_Q2RE and iCOOL ranges

15^{years}
C_Q

Panasonic's iC_Q2RE and iCOOL condensing units offer a complete line of cooling solutions using CO₂, A2L, and HFC/HFO refrigerants – ideal for retail stores, supermarkets, HoReCa, gas stations, food processing, and cold storage. As the industry transitions toward greener technologies, Panasonic provides systems that address both immediate needs and long-term goals in energy efficiency and enhanced environmental responsibility.



ABOUT

Refrigeration engineered for excellence	→ 4
Solutions with high energy saving	→ 6
REF PRO DESIGNER	→ 8

ABOUT

iCO2RE CO₂ range – Naturally efficient cooling	→ 10
A more sustainable refrigeration systems in your food retail	→ 12
The safe refrigeration systems for your healthcare business	→ 13
iCO2RE OCU-CR CO ₂ Series	→ 14
Technology by Panasonic	→ 16
Control and connectivity	→ 18
iCO2RE OCU/SCU-CRC Custom-fit CO ₂ Series	→ 22

PRODUCT SPECIFICATIONS

iCO2RE CO₂ range product specifications and capacity tables	
iCO2RE OCU-CR CO ₂ Series · R744	→ 20
iCO2RE OCU/SCU-CRC Custom-fit CO ₂ Series · R744	→ 24
iCO2RE NCU-CTC CO ₂ Series · R744	→ 25
Customisation options for iCO2RE CO ₂ range	→ 26
Accessories and control – iCO2RE CO ₂ range	→ 28
Accessories compatibility – iCO2RE CO ₂ range	→ 30

ABOUT

iCOOL A2L and HFC/HFO range – Inverter solutions for today and tomorrow	→ 32
iCOOL SE Series - A2L and HFC/HFO condensing units	→ 34
iCOOL OCU/SCU Series - HFC/HFO condensing units	→ 40
iCOOL LCU/WCU Series - HFC/HFO compressor base/condensing units	→ 48

PRODUCT SPECIFICATIONS

iCOOL A2L and HFC/HFO range product specifications and capacity tables	
iCOOL SE Series – OCU-LRE/LRC – A2L-ready MT models · R454C / R455A / R448A / R449A / R134a / R513A	→ 35
iCOOL SE Series – OCU-LRE – A2L-ready LT models · R454C / R455A / R448A / R449A	→ 36
iCOOL SE Series – OCU-KRE – HFC/HFO models · R448A / R449A / R134a / R513A	→ 38
iCOOL OCU Series · R448A / R449A / R134a / R513A	→ 41
iCOOL SCU Series · R448A / R449A / R134a / R513A	→ 45
iCOOL LCU Series (remote compressor base) · R448A / R449A / R134a / R513A	→ 50
iCOOL WCU Series (water/glycol cooled condensing units) · R448A / R449A / R134a / R513A	→ 52
Customisation options for iCOOL A2L and HFC/HFO range	→ 56
Accessories and compatibility – iCOOL A2L and HFC/HFO range	→ 57

ABOUT

PACi NX Elite can cool rooms down to 8 °C	→ 58
Bringing nature's balance indoors	→ 60

PRODUCT SPECIFICATIONS

PACi NX Elite product specifications	
PACi NX Series Elite wall-mounted - PK4 · R32	→ 62
PACi NX Series Elite 4 way 90x90 cassette - PU3 · R32	→ 63
PACi NX Series Elite ceiling - PT3 · R32	→ 64
PACi NX Series Elite adaptive ducted unit - PF3 · R32	→ 65
PACi NX Jet Air Stream · R32	→ 66
Accessories and control – PACi NX	→ 67

Refrigeration engineered for excellence

Step toward more sustainable cooling solutions.



Panasonic introduces its most extensive and versatile commercial refrigeration range to date.

This milestone reflects a significant strategic evolution.

**The world keeps moving. So must cooling.
Meet our refrigeration portfolio.**

Complete line of cooling solutions using CO₂, HFO and HFC refrigerants.

Panasonic unveils iC02RE and iCOOL refrigeration ranges.

The portfolio introduces two distinct product ranges, designed to provide commercial refrigeration to a wide range of applications including retail stores, supermarkets, HoReCa sector, gas stations and cold storage applications:

iCQRE

Move to natural refrigerants.



CO₂
R744

iC02RE

Move to natural refrigerants.

Panasonic's flagship range of CO₂ condensing units, representing the core of future-proof, natural refrigerant technology.

The iC02RE range offers a broad selection of cooling capacities, with up to 29 kW for medium temperature applications, and up to 15 kW for low temperature requirements.

iCOOL

Reduce your energy bills with advanced Inverter technology.



iCOOL

Reduce your energy bills with advanced Inverter technology.

A comprehensive range of Inverter HFC and A2L-ready solutions, designed to meet today's market needs while supporting the transition to lower-GWP refrigerants. The iCOOL range covers a wide spectrum of cooling capacities – up to 42 kW for medium temperature applications, and up to 14 kW for low temperature needs.

These brands reflect Panasonic's dual commitment: first, to lead the transition to more sustainable refrigerants; and second, to deliver long-term energy savings and lower electricity bills through advanced Inverter technology, benefiting both today's systems and those ready for the future.

Solutions with high energy saving


Panasonic's iCQ2RE and iCOOL ranges of condensing units offer a reliable solution for a wide range of applications, including convenience stores, supermarkets, gas stations and cold rooms.



Showcases.

Convenience stores, supermarkets, gas stations.

iCQRE
iCOOL

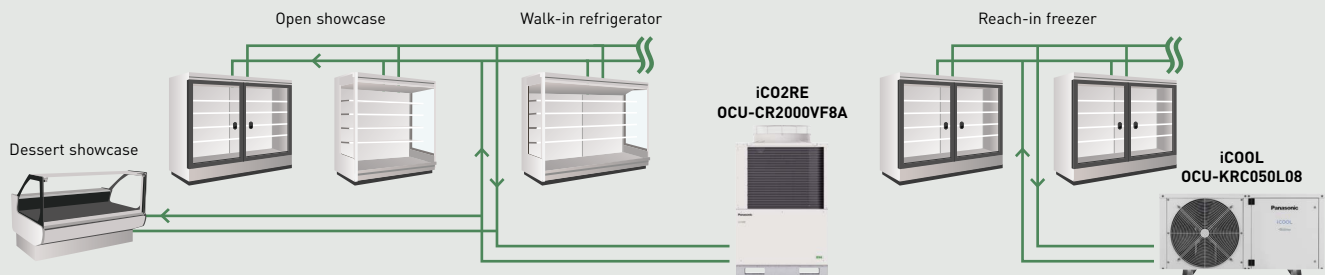


Cold room application to keep food fresh.

Multiple installation capabilities.

Unparalleled flexibility:

- Food retail applications (convenience store, supermarkets, gas stations)
- Food service applications (restaurants, canteens, schools)
- Non-food applications (warehousing, industrial storage, healthcare)

iCQRE
iCOOL

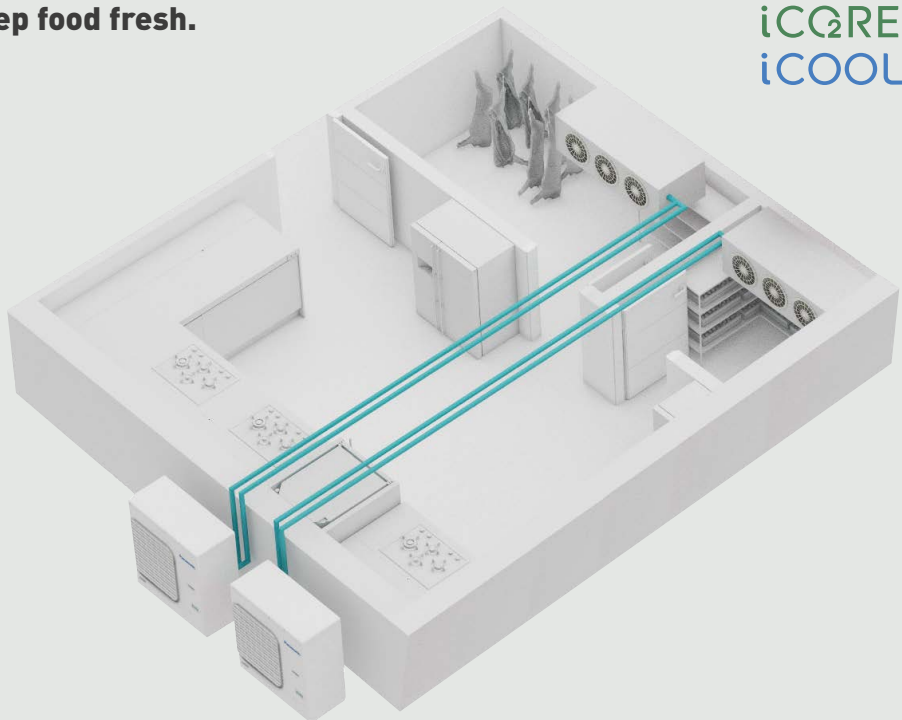

Heat recovery function for heating.


This function offers refrigeration combined with heating all in one system. The ground-breaking solution allows for increased opportunity to cut running costs by utilizing exhausted heat from refrigeration and transferring to the energy source for heating.

iCQRE
iCOOL

What is heat recovery function?

Solution example.

Heat recovery system can produce both heating and refrigeration.

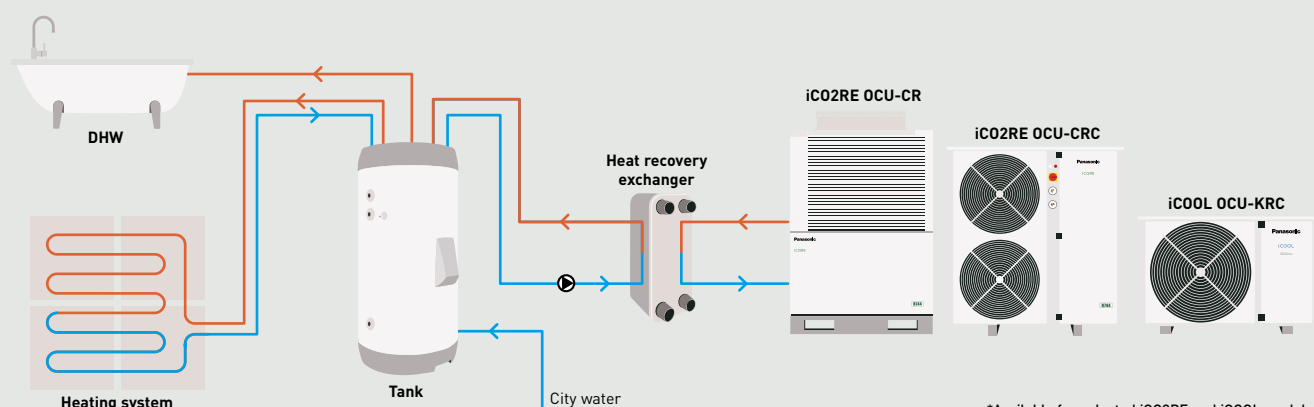

*Available for selected iC02RE and iC00L models.

REF PRO DESIGNER

Think beyond unit selection.



REF PRO DESIGNER - An advanced design tool that supports engineers, installers, and technicians in designing advanced systems for commercial refrigeration installations.




**ONE TOOL.
ONE WORKFLOW**



**BETTER DECISIONS
EARLIER. FEWER
REDESIGNS LATER**



**ACCESS IT ANYTIME,
ANYWHERE- IN YOUR
LANGUAGE**

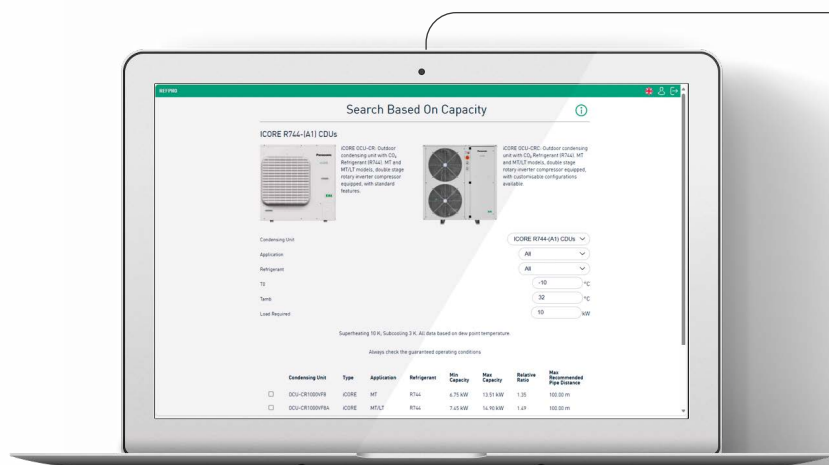


**Select the optimal
iCQRE/iCOOL unit for
your application.**

Panasonic

**REF
PRO DESIGNER**

**Design your installation with
confidence and precision.**

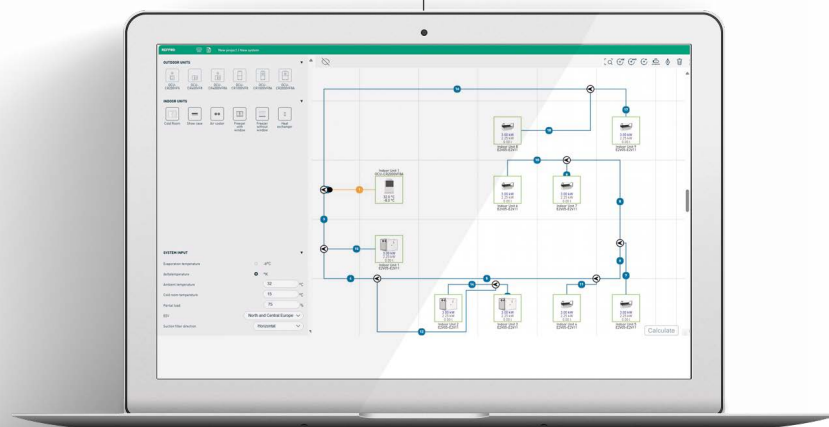

Ready to work on all devices, computers, tablets and smartphones!

- Evaporation temperature selection
- Cooling capacity calculation
- Refrigerant piping calculation
- EEV expansion valves calculation
- Refrigerant charge calculation
- Oil charge calculation

**Download the
comprehensive
project report.**



PRO Club

www.panasonicproclub.com

Or connect simply with your
smartphone to the PRO Club
using this QR



iC02RE CO₂ range – Naturally efficient cooling


iC02RE

Panasonic's iC02RE range is a new generation of CO₂ condensing units, built on more sustainability, energy efficiency, and flexibility. Using CO₂ – a natural refrigerant – iC02RE supports today's environmental goals while delivering reliable, high-performance cooling.



Comparison of CO₂ emissions.

Unit: t/year

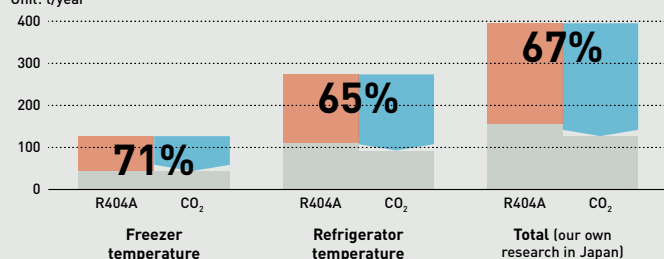

Energy saving
25,4% freezer
16,2% refrigeration

CO₂ emission
67% reduction

Direct influence ¹⁾Indirect influence ²⁾

1) Direct influence presents the effect of refrigerant leakage comparing R744 (CO₂) with R404A. 2) Indirect influence presents CO₂ emissions linked to power consumption of CO₂ unit and conventional units.

By Panasonic research in Japan. Comparing 6 shops average for R404A Inverter multi condensing unit.

The range includes the OCU-CR CO₂ Series – value-packed units designed for the evolving, eco-conscious market – and the OCU/SCU/NCU Custom Fit CO₂ Series, offering factory-integrated, and fully tested options for faster installation and reduced on-site labour.

iCO2RE is the core of an efficient, future-ready refrigeration system – combining ecological responsibility with practical performance to meet a wide range of market needs.

iCO2RE OCU-CR CO₂ Series - R744.


From 4 to 29 kW MT and from 2 to 15 kW LT.



MADE IN JAPAN

iCO2RE OCU/SCU-CRC Custom-fit CO₂ Series - R744.

From 6 to 21 kW MT and from 3 to 7 kW LT.



MADE IN EUROPE

NEW! iCO2RE NCU CO₂ Series - R744.

Up to 1,8 kW MT and up to 0,9 kW LT.



MADE IN EUROPE

Choose a greener solution by Panasonic.

iCO2RE range – CO₂ condensing units for medium and low temperature refrigeration applications, tailored for demanding needs.

System reliability and precise temperature control are critical to maintaining product quality and ensuring food safety for end customers. Panasonic's solutions are also designed for high energy efficiency, helping businesses reduce operational costs while supporting their environmental responsibilities.

Why CO₂?: Natural refrigerant

EU F-Gas regulation is a key priority for European countries. It ensures compliance with the Kigali Amendment supporting international climate commitments on greenhouse gases and leading the global transition to climate-friendly HFC-free technologies.

Carbon dioxide (R744) is regaining its place in the refrigeration world. Driven by environmental concerns, legislation now requires increased adoption of 'alternative' refrigerants, such as CO₂.

CO₂ is an climate-friendly solution, with zero ODP and "GWP" (Global Warming Potential)=1 means natural substance in the atmosphere.

In Europe a step-by-step HFC reduction has been in place since the F-Gas regulation was introduced in 2015.

Countries all over the world have actively been preparing to enact the necessary domestic legislation to implement the agreement to reduce the use of HFCs.

The following table shows how well R744 (CO₂) performs regarding environmental impact and safety.

Panasonic provides a solution in Europe with CO₂ refrigeration systems to prevent global warming and to support climate-friendly retail operations

ODP (Ozone Depletion Potential)=0 - GWP (Global Warming Potential)=1					
	Next generation refrigerant			Current refrigerant	
	CO ₂	Ammonia	Isobutane	R410A	R404A
ODP	0	0	0	0	0
GWP	1	0	4	2090	3920
Flammability	Non flammable	Light flammable	Flammable	Non flammable	Non flammable
Toxicity	No	Yes	No	No	No

A more sustainable refrigeration systems in your food retail


CO₂ refrigerant is the choice to curb carbon footprint of any business organization, especially to food retailers, to whom it brings key advantages.

Panasonic professionals strongly supports your projects to meet customer's request!


*Case study based on iCO2RE OCU-CR CO₂ Series CO₂ units.




1
10 HP MT TYPE
(OCU-CR1000VF8).



2
2 HP MT/LT TYPE
(OCU-CR200VF5A).



3
Reach-in freezer (field supplied).




4
Serve-over counters,
showcase and walk-in
refrigerator (field supplied).

MT application with cold room
and multiple showcase in the
same system.

- Quiet operation makes outdoor units installation inside possible
- Flexible duct installation

View from outside.



Complete HVAC&R solutions for your store.

Panasonic delivers integrated cooling and heating systems — designed to improve efficiency, comfort and sustainability across your entire retail space. Powered by natural refrigerants.

Up to 100 m
piping
connection.

Multiple evaporators
connections possible.

MT operation. ———
LT operation. ———



Nolan's Supermarket.

Nolan's Supermarket celebrated its 60th year in business with an extension and full refurbishment which completely overhauled the existing store.

A particular focus of the project was to create a state-of-the-art refrigeration system operating on the 'Zero Ozone Depletion' plus ultralow GWP of 1 natural refrigerant CO₂, and as part of the scheme. Panasonic CO₂ condensing units - iCO2RE OCU-CR CO₂ Series have been chosen because of the high performance and reliable quality.

The safe refrigeration systems for your healthcare business

CO₂ is the right refrigerant to curb carbon footprint of any business organization. In addition, there are advantages specially for healthcare business. The project example shows one of the warehouse in the healthcare laboratory which requires several cold rooms there to keep bio-products safely.


*Case study based on iCO2RE OCU-CR CO, Series CO, units.



10 HP LT TYPE
(OCU-CR1000VF8A).



10 HP MT TYPE
(OCU-CR1000VF8).

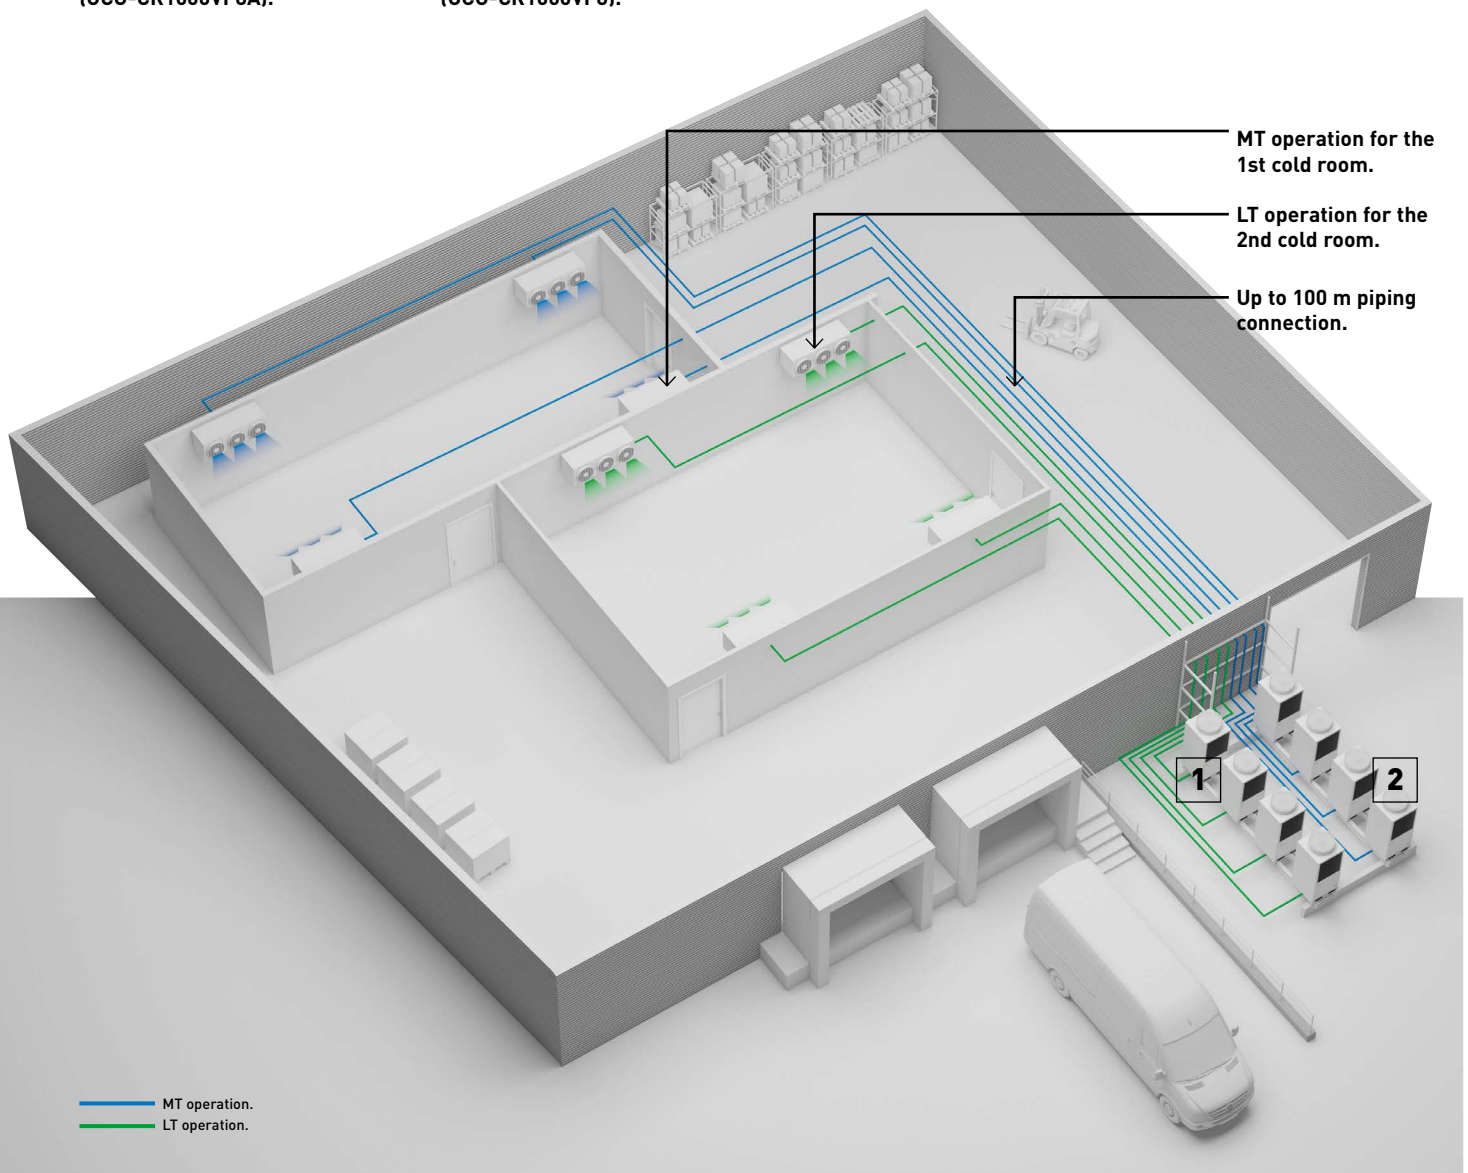

STEMCELL Technologies.

STEMCELL Technologies is a global biotechnology company that develops, manufactures and sells products and provides services that support academic and industrial scientists.

Panasonic CO₂ condensing units - iCO2RE OCU-CR CO, Series CO, have been chosen to fulfill the expectation of climate-friendly and safety requirements.

The products with reliable quality and high performance was also an essential point.

iC02RE OCU-CR CO₂ Series

CO₂ transcritical condensing units. iC02RE OCU-CR CO₂ Series offer a wide range of refrigeration systems, meeting the specific needs of various commercial applications.



Superior cooling capacity at each evaporating temperature.

CO₂ transcritical condensing units - iCO2RE OCU-CR CO₂ Series have a high cooling capacity at each set point. The CO₂ 2-stage compressor developed by Panasonic is designed to compress CO₂ refrigerant twice; it reduces the load in operation by half (compared to 1-stage refrigerant compression) and delivers increased durability and reliability.

Units can be programmed to run at low and medium temperatures at initial set-up. These settings can then be modified by turning a simple and user-friendly rotary switch to further enhance energy savings.


MT/LT type: 200VF5A - 3,7 / 1,9 kW.

3,83 SEPR cooling.
1,92 SEPR freezing.

*SEPR values has been tested at 3-part laboratory.



OCU-CR200VF5A¹⁾.
Cooling capacity (kW)

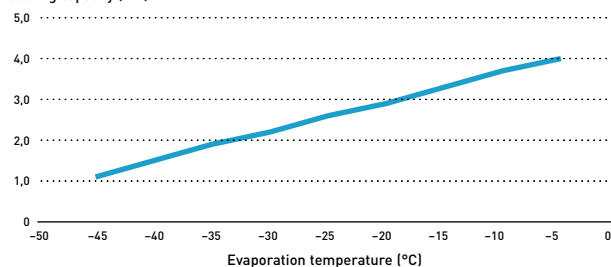


MT type: 400VF8 - 6,9 kW. MT/LT type: 400VF8A - 7,5 / 3,8 kW.

2,45 SEPR cooling.
1,56 SEPR freezing.

*Model 400VF8A.



OCU-CR400VF8 / OCU-CR400VF8A²⁾.
Cooling capacity (kW)

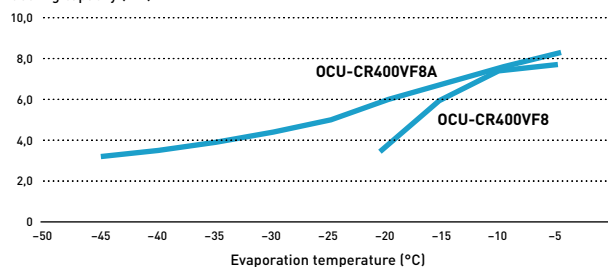


MT type: 1000VF8 - 13,5 kW. MT/LT type: 1000VF8A - 14,9 / 7,6 kW. NEW! MT/LT type: 1001VF8A - 16,0 / 8,6 kW.

3,00* SEPR cooling.
1,67* SEPR freezing.

*Model 1001VF8A.




OCU-CR1000VF8 / OCU-CR1000VF8A / OCU-CR1001VF8A²⁾.
Cooling capacity (kW)

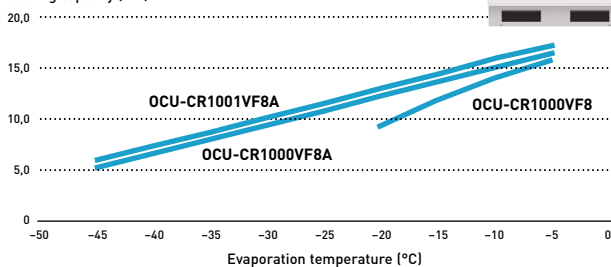

MT/LT type: 2000VF8A - 28,7 / 14,6 kW.

3,10 SEPR cooling.
1,64 SEPR freezing.

OCU-CR2000VF8A²⁾.
Cooling capacity (kW)

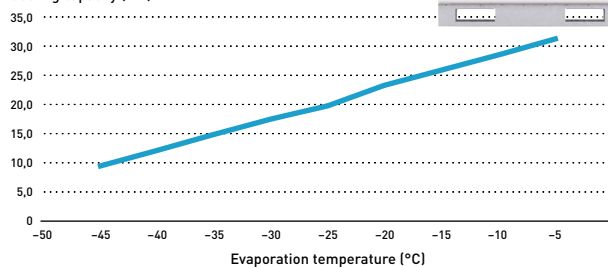

1) Ambient temperature: 32 °C, 230 V, refrigerant: R744, suction gas temperature: 18 °C. 2) Ambient temperature: 32 °C, 400 V, refrigerant: R744, suction gas temperature: 18 °C.

1 Superior efficiency with reliable quality

- Panasonic has combined the 2-stage compressor with the split cycle for increased efficiency
- High seasonal performance. SEPR: maximum 3,83 in cooling, 1,92 in freezing*
- High COP at high ambient temperature

*200VF5A.

2 Heat recovery port ¹⁾ as renewable energy

- Maximum 16,7 kW ²⁾ of heating for free
- Optional possibility to get subsidy (depending on location)
- Easy connection process

1) For models 1000VF8A, 1001VF8A and 2000VF8A. 2) For model 1000VF8A.

3 Flexible installation

- Set-points at medium or low temperature available depending on applications
- Compact unit
- Silent operation
- Long piping length: maximum 100 m*
- High external static pressure
- Transfer pressure control for stable EEV expansion valve control in showcases*

*For models 400VF8A, 1000VF8A, 1001VF8A and 2000VF8A.

Technology by Panasonic

Reliability is our main target.

We ensure excellent quality control established by skilled factory team.



iCO2RE OCU-CR CO₂ Series 20 HP MT/LT model.


The iCO2RE OCU-CR CO₂ Series now includes 20 HP MT/LT model, a highly efficient multi compressor solution.

- Multi-compressor systems
- Smaller footprint
- Maximum piping length of 100 m
- Cooling capacity can be controlled from 25 to 100% under partial load
- Flexible and precise control capabilities with digital input/output

Energy efficient multi compressors operation.

By distributing the workload between two compressors, the system operates efficiently, adjusting capacity to match the varying cooling demands. Compressors 1 and 2 alternate every 10 days to ensure even load distribution.

Example of compressor operation.

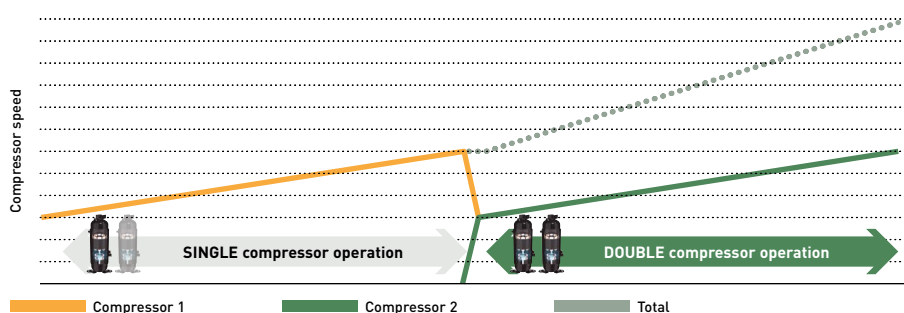


Panasonic's combined technology of the 2-stage compressor with the split cycle.

- Panasonic 2-stage rotary compressor delivering powerful performance for more than 20 years
- Split cycle* enhances cooling effect


*Available for 200VF5A, 400VF8A, 1000VF8A and 2000VF8A models.

**In the case that the standard cycle with 1-stage rotary compressor was compared.


Watch the highlighted technology video.

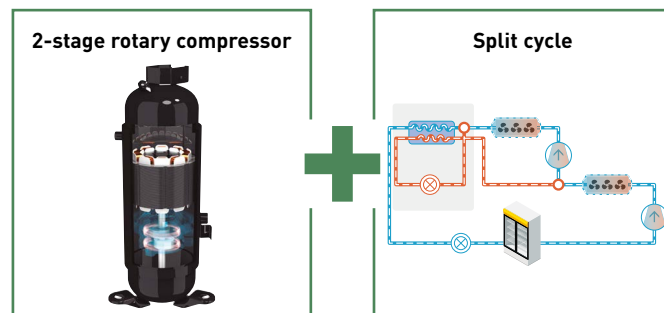

Standard cycle.

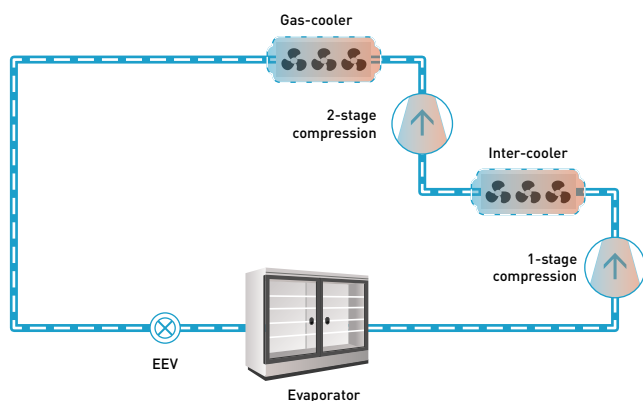

Split cycle.

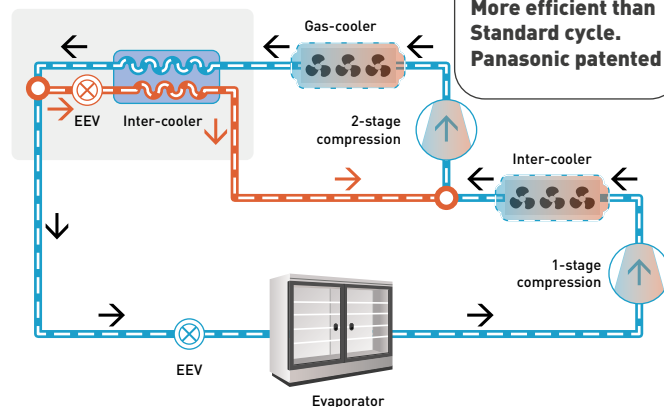

Reliable CO₂ technology by Panasonic.

- Reliable quality: 15 years of CO₂ cold chain production in Japan
- 26500 units sold and installed in more than 6500 retail operations such as convenience stores and supermarkets in Japan*
- Excellent quality control established by skilled factory team
- Panasonic offers 5 year warranties on compressors and 2 years on components
- The 5 year compressor warranty matches the products long lifespan

*As of the end of August 2025.

15 years
CO₂



Control and connectivity

Panasonic CO₂ condensing units - iC02RE OCU-CR CO₂ Series is optimized with Panel-C intelligent controller and a service checker for professionals.

It can be easily integrated with major monitoring systems.



Modbus compatibility with monitoring system.

Panasonic CO₂ condensing units - iC02RE OCU-CR CO₂ Series can be supervised by major monitoring system such as CAREL, Eliwell, COPELAND, Danfoss, RDM and Pego. Monitoring system ensures the recording, monitoring and reporting of temperature conditions etc... of entire CO₂ condensing units - iC02RE OCU-CR CO₂ Series system at shops.

Monitoring system



Standard boss & boss-mini



AK-SM Series*



TelevisGo



Xweb



DMTOUCH



TeleNET

*M2M1-10 gateway (Model code: FDS021) is required in addition to the monitoring system. M2M1-10 gateway is a field supply.
X-Gate (Model code : 080G0345 + AK-PS 063 0800Z0057) is required in addition to the Danfoss monitoring system AK-SM 800A. X-Gate gateway is a field supply.

Control panel and EEV expansion valves.

Panel-C, an intelligent controller with a compact chassis. This controller has the smart program especially for showcases and cold rooms. EEV expansion valves are ready with 8 different sizes to meet precisely the field demand and it's delivered with Panel-C as a kit.

Intelligent controller with compact chassis. Panel-C.

- MPXPRO control fully pre-programmed for MT and LT on the same panel
- Compact structure size: 300 x 220 x 120 mm
- Necessary cables, EEV stator, temperature and pressure probes as standard equipment
- Ultracap technology as standard equipment for emergency EEV's closing in the event of mains power failure
- Smart defrost functions, advanced superheat control, light and showcase curtain management, etc
- Own display user terminal plus keypad for programming, built-in switching power supply, Modbus, etc
- Management of HACCP alarms

EEV expansion valves line-up.

- EEV's E2V-CW with 3/8" ODF copper fittings for high pressure applications (CO₂)
- Operation refrigerant temperature: -40 T 70 °C
- Maximum operating pressure for all the models 03, 05, 09, 11, 14, 18, 24 and 30 (MOP) 140 bar
- Maximum operating pressure difference for 03, 05, 09, 11, 14, 18, (MOPD) 120 bar, 24 (MOPD) 85 bar, and 30 (MOPD) 90 bar
- Bipolar stator hermetic IP69K as standard equipment (supplied on panel)
- Mechanical strainer as standard equipment (500 mm mesh)
- Equipercetile control particularly effective at partial load with reliable operation even after 1,2 billion steps

*Please refer the model references in page 28.



CO₂ service checker.

PAW-CO2-CHECKER

The service checker is a useful tool which supports your technical tasks on the field such as commissioning, maintenance and troubleshooting for Panasonic CO₂ condensing units - iCO2RE OCU-CR CO₂ Series.

Main features:

- Reading and recording variable technical parameters
- Main technical parameters available*: pressures, temperatures, opening of expansion valves, states of solenoid valves, rotational speeds of the gas-cooler fan motor, frequency and compressor's current, etc.
- Setting change of operating values possible
- 2D graph visualization for the detailed analysis
- Monitoring an alarm status, for example the status of the compressor oil level, etc.

*Please check all the parameters available in the manual.


To use it, is necessary to download free Device Manager software from the Eliwell website:

Visit: <https://www.eliwell.com/en/Family/DeviceManager.html> using this QR.

Eliwell product name: Device Manager 100. Eliwell part number: DMP1000002000.



eliwell
by Schneider Electric

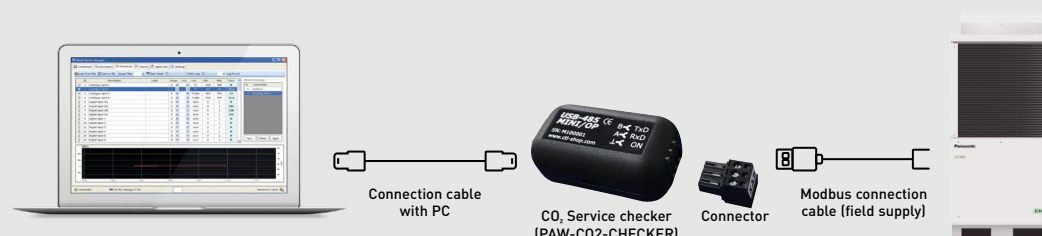

iCO2RE OCU-CR CO₂ Series - R744

Specifications and capacity tables.



MODEL			OCU-CR	200VF5A	400VF8	400VF8A	1000VF8	1000VF8A*	1001VF8A**	2000VF8A
Compressor				Single compressor	Single compressor	Single compressor	Single compressor	Single compressor	Single compressor	Tandem compressor
Refrigerants				R744	R744	R744	R744	R744	R744	R744
PED category				I	II	II	II	II	II	II
Application				MT / LT	MT	MT / LT	MT	MT / LT	MT / LT	MT / LT
Power supply	Voltage	V		220-230-240	380-400-415	380-400-415	380-400-415	380-400-415	380-400-415	380-400-415
	Phase			Single phase	Three phase	Three phase	Three phase	Three phase	Three phase	Three phase
	Frequency	Hz		50	50	50	50	50	50	50
Cooling capacity at ET -35 °C AT 32 °C	Min ~ Max	kW		1,1 - 1,9	—	1,9 - 3,8	—	3,8 - 7,6	3,3 - 8,6	3,8 - 14,6
Cooling capacity at ET -10 °C AT 32 °C	Min ~ Max	kW		2,1 - 3,7	3,4 - 6,9	3,8 - 7,5	6,8 - 13,5	7,5 - 14,9	6,2 - 16,0	7,5 - 28,7
SEPR freezing at ET -35 °C AT 32 °C				1,92	—	1,73	—	1,49	1,67	1,64
SEPR cooling at ET -10 °C AT 32 °C				3,83	3,17	3,20	2,62	2,86	3,00	3,10
Annual electricity consumption at ET -35 °C AT 32 °C			kWh/a	8021	—	16255	—	39985	38392	66760
Annual electricity consumption at ET -10 °C AT 32 °C			kWh/a	6797	13384	14488	32815	32409	32822	57076
Evaporator connection				Multiple	Multiple	Multiple	Multiple	Multiple	Multiple	Multiple
Evaporation temperature	Min ~ Max	°C		-45 ~ -5	-20 ~ -5	-45 ~ -5	-20 ~ -5	-45 ~ -5	-45 ~ -5	-45 ~ -5
Ambient temperature	Min ~ Max	°C		-20 ~ +43	-20 ~ +45	-20 ~ +45	-20 ~ +43	-20 ~ +43	-20 ~ +45	-20 ~ +45
PS line	Suction	bar		80	80	80	80	80	80	80
	Liquid	bar		120	80	80	80	80	80	80
User system external alarm. Non-voltage contact				Yes	Yes	Yes	Yes	Yes	Yes	Yes
Liquid tube electromagnetic valve output			Vac	220-230-240	220-230-240	220-230-240	220-230-240	220-230-240	—	—
Showcase operation ON / OFF signal. Digital input. Non-voltage contact				Yes	Yes	Yes	Yes	Yes	Yes	Yes
Modbus communication line (RS485)			Ports	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Compressor type				2- stage rotary	2- stage rotary	2- stage rotary	2- stage rotary	2- stage rotary	2- stage rotary	2- stage rotary
Dimension	W x H x D	mm		900 x 930 x 437	1143 x 948 x 609	1143 x 948 x 609	890 x 1941 x 890	890 x 1941 x 890	890 x 1941 x 890	1190 x 1941 x 890
Weight		Kg		70	136	149	293	320	315	494
Connections ¹⁾	Suction	Inch (mm)		3/8 (9,52)	1/2 (12,70)	1/2 (12,70)	3/4 (19,05)	3/4 (19,05)	3/4 (19,05)	7/8 (22,22)
	Liquid	Inch (mm)		1/4 (6,35)	3/8 (9,52)	3/8 (9,52)	5/8 (15,88)	5/8 (15,88)	5/8 (15,88)	3/4 (19,05)
Maximum recommended pipe distance			m	25	50 ²⁾	50 ²⁾	100 ²⁾	100 ²⁾	100 ²⁾	100 ²⁾
Air flow			m ³ /min	54	59	59	220	220	220	220
External static pressure			Pa	17	50	50	58	58	58	58
Performance - additional data	Ambient temperature	°C		32	32	32	32	32	32	32
	Evaporating temperature	°C		-10 -35	-10 -35	-10 -35	-10 -35	-10 -35	-10 -35	-10 -35
	Nominal load ampere	A		7,94 7,26	6,14	7,2 6,2	12,6	12,6 11,6	13,9 TBC	24,31 20,49
	Sound level ³⁾	dB(A)		35,5	33,0	36,1	36,0 ⁴⁾	36,0 ⁴⁾	39,5 (36,5 ⁴⁾)	42,0 (39,0 ⁴⁾)

1) These diameters correspond to the output of the unit. The required diameter must be calculated with Refrigeration designer available on PRO Club. 2) PZ-68S (refrigeration oil) must be added according to Refrigeration designer available on PRO Club. 3) ET -10 °C, at maximum speed, 10 m from product. 4) Performance in a silent mode. *CR1000VF8A: subject to availability. **Available in Summer 2026.

+ CHECK PAGES 28 - 31 FOR A WIDER SELECTION OF ACCESSORIES



*45 °C AMBIENT TEMPERATURE: For OCU-CR400VF8A, OCU-CR1001VF8A and OCU-CR2000VF8A.




MT/LT	Cooling capacity at				R744						
	ET				-45 °C	-35 °C	-30 °C	-25 °C	-15 °C	-10 °C	-5 °C
OCU-CR200VF5A	AT	32 °C	Min - Max	kW	0,7 - 1,2	1,1 - 1,9	1,3 - 2,3	1,5 - 2,6	1,9 - 3,3	2,1 - 3,7	2,3 - 4,0
		38 °C	Min - Max	kW	0,6 - 1,1	1,0 - 1,8	1,2 - 2,1	1,4 - 2,5	1,8 - 3,1	2,0 - 3,5	2,2 - 3,8
		43 °C	Min - Max	kW	0,6 - 1,0	0,9 - 1,6	1,1 - 2,0	1,3 - 2,3	1,6 - 2,9	1,8 - 3,2	2,0 - 3,5
MT	Cooling capacity at				R744						
	ET				—	—	—	—	-15 °C	-10 °C	-5 °C
OCU-CR400VF8	AT	32 °C	Min - Max	kW	—	—	—	—	2,9 - 5,9	3,4 - 6,9	3,7 - 7,4
		38 °C	Min - Max	kW	—	—	—	—	2,7 - 5,3	3,1 - 6,2	3,3 - 6,7
		43 °C	Min - Max	kW	—	—	—	—	2,3 - 4,6	2,7 - 5,4	2,9 - 5,8
MT/LT	Cooling capacity at				R744						
	ET				-45 °C	-35 °C	-30 °C	-25 °C	-15 °C	-10 °C	-5 °C
OCU-CR400VF8A	AT	32 °C	Min - Max	kW	1,7 - 3,3	1,9 - 3,8	2,2 - 4,4	2,6 - 5,1	3,4 - 6,7	3,8 - 7,5	4,1 - 7,4
		38 °C	Min - Max	kW	1,5 - 3,1	1,7 - 3,5	2,0 - 4,0	2,3 - 4,7	3,1 - 6,2	3,5 - 6,1	3,8 - 5,6
		43 °C	Min - Max	kW	1,4 - 2,7	1,5 - 3,1	1,8 - 3,6	2,1 - 4,2	2,8 - 5,0	3,2 - 4,7	3,4 - 4,2
MT	Cooling capacity at				R744						
	ET				—	—	—	—	-15 °C	-10 °C	-5 °C
OCU-CR1000VF8	AT	32 °C	Min - Max	kW	—	—	—	—	5,8 - 11,6	6,8 - 13,5	7,4 - 14,8
		38 °C	Min - Max	kW	—	—	—	—	4,9 - 9,9	5,8 - 11,6	6,4 - 12,8
		43 °C	Min - Max	kW	—	—	—	—	3,6 - 7,3	4,4 - 8,8	4,9 - 9,7
MT/LT	Cooling capacity at				R744						
	ET				-45 °C	-35 °C	-30 °C	-25 °C	-15 °C	-10 °C	-5 °C
OCU-CR1000VF8A	AT	32 °C	Min - Max	kW	2,6 - 5,1	3,8 - 7,6	4,5 - 9,1	5,3 - 10,5	6,7 - 13,5	7,5 - 14,9	8,1 - 16,2
		38 °C	Min - Max	kW	2,3 - 4,7	3,5 - 7,1	4,2 - 8,4	4,9 - 9,8	6,3 - 12,7	7,0 - 14,0	7,6 - 15,3
		43 °C	Min - Max	kW	2,0 - 4,0	3,1 - 6,2	3,8 - 7,5	4,4 - 8,8	5,8 - 11,5	6,4 - 12,8	7,0 - 14,0
MT/LT	Cooling capacity at				R744						
	ET				-45 °C	-35 °C	-30 °C	-25 °C	-15 °C	-10 °C	-5 °C
OCU-CR1001VF8A	AT	32 °C	Min - Max	kW	TBC	3,3 - 8,6	TBC	TBC	TBC	6,2 - 16,0	TBC
		38 °C	Min - Max	kW	TBC	TBC	TBC	TBC	TBC	TBC	TBC
		43 °C	Min - Max	kW	TBC	3,0 - 7,7	TBC	TBC	TBC	4,7 - 12,2	TBC
MT/LT	Cooling capacity at				R744						
	ET				-45 °C	-35 °C	-30 °C	-25 °C	-15 °C	-10 °C	-5 °C
OCU-CR2000VF8A	AT	32 °C	Min - Max	kW	2,6 - 9,7	3,8 - 14,6	4,6 - 17,4	5,3 - 20,2	6,8 - 25,9	7,5 - 28,7	8,2 - 31,3
		38 °C	Min - Max	kW	2,4 - 9,2	3,6 - 13,9	4,3 - 16,4	5,0 - 19,1	6,4 - 24,6	7,1 - 27,1	7,8 - 29,6
		43 °C	Min - Max	kW	2,3 - 8,6	3,4 - 12,9	4,0 - 15,4	4,7 - 18,0	6,1 - 23,1	6,7 - 25,6	7,3 - 27,9

REF PRO DESIGNER.

Think beyond unit selection.

An advanced design tool that supports engineers, installers, and technicians in designing advanced systems for commercial refrigeration installations:
<http://www.panasonicproclub.com>

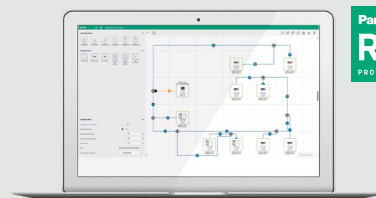

iC02RE OCU/SCU-CRC Custom-fit CO₂ Series

Complement of the Panasonic's existing R744 units offering maintenance friendly solutions and customisation features.




**MT/LT type:
OCU-CRC060A08**

6,0 kW (MT).
3,0 kW (LT).

**MT/LT type:
OCU-CRC150A08**


15,2 kW (MT).
7,3 kW (LT).

**MT type:
OCU-CRC210M08**

20,6 kW (MT).

**MT/LT type:
SCU-CRC150A08**

15,2 kW (MT).
7,3 kW (LT).



SMART INTERFACE (LOCAL WIRELESS ACCESS)



SERVICE DOOR + PANEL WITH SERVICE VALVE CONNECTIONS



QUICK-CHANGE COMPRESSOR SKID. BASED ON PLATE AND ELASTIC HOSES CONNECTIONS, DECREASING THE VIBRATIONS AND NOISE



FRONT WALL INTEGRATED MANOMETERS

Refrigeration factory in Europe.**Wrocław, Poland.**

Equipped with a dedicated in-house R&D team focused on advancing refrigeration technologies, the site will also house its training hub and a state-of-the-art refrigeration laboratory. With local production and a streamlined supply chain, ensuring shorter delivery times across Europe—helping you get the solutions you need, faster.



iC02RE OCU/SCU-CRC Custom-fit CO₂ Series - R744

Specifications and capacity tables.



MODEL			OCU-CRC060A08	OCU-CRC150A08	OCU-CRC210M08	SCU-CRC150A08
Compressor			Single compressor	Single compressor	Single compressor	Single compressor
Refrigerants			R744	R744	R744	R744
PED category			II	II	III	II
Application			MT / LT	MT / LT	MT	MT / LT
Power supply	Voltage	V	380 - 420	380 - 420	380 - 420	380 - 420
	Phase		Three phase	Three phase	Three phase	Three phase
	Frequency	Hz	50	50	50	50
Cooling capacity at ET -35 °C AT 32 °C	Min - Max	kW	1,2 - 3,0	3,0 - 7,3	—	3,0 - 7,3
Cooling capacity at ET -10 °C AT 32 °C	Min - Max	kW	2,7 - 6,0	6,8 - 15,2	6,0 - 20,6	6,8 - 15,2
SEPR freezing at ET -35 °C AT 32 °C			—	1,64	—	1,64
SEPR cooling at ET -10 °C AT 32 °C			2,78	3,07	3,00	3,07
Annual electricity consumption at ET -35 °C AT 32 °C			kWh/a	17883	33650	—
Annual electricity consumption at ET -10 °C AT 32 °C			kWh/a	13371	30019	42050
Evaporator connection			Multiple	Multiple	Multiple	Multiple
Evaporation temperature	Min - Max	°C	-35 ~ -5	-35 ~ 0	-20 ~ -5	-35 ~ 0
Ambient temperature	Min - Max	°C	-20 ~ 43	-20 ~ 43	-20 ~ 43	-20 ~ 43
PS line	Suction	bar	80	80	80	80
	Liquid	bar	80	80	90	80
User system external alarm. Non-voltage contact			Yes	Yes	Yes	Yes
Liquid tube electromagnetic valve output			Vac	—	—	—
Showcase operation ON / OFF signal. Digital output. Non-voltage contact			Yes	Yes	Yes	Yes
Modbus communication line [RS485]			Ports	Yes	Yes	Yes
Compressor type			2- stage rotary	2- stage rotary	2- stage rotary	2- stage rotary
Dimensions	W x H x D	mm	1426 x 1100 x 541	1426 x 1516 x 541	1600 x 1600 x 908	1326 x 1724 x 790
Weight		kg	200	290	390	300
Connections	Suction	Inch [mm]	3/8 [9,52]	1/2 [12,70]	5/8 [15,88]	1/2 [12,70]
	Liquid	Inch [mm]	3/8 [9,52]	1/2 [12,70]	1/2 [12,70]	1/2 [12,70]
Maximum recommended pipe distance			m	40	80	80
Air flow			m³/h	1x5700	2x4600	2x7500
External static pressure			Pa	120 ¹⁾	N/A	N/A
Performance - additional data	Nominal operating current at ET -10 °C MT / -30 °C LT AT 32 °C and 230 - 400 V 50 Hz		A	9,4	18,3	26,9
	Maximum operating current (in the most loaded phase at 230 - 400 V 50 Hz)		A	11,2	23,4	30,1
	Sound level at 10 m		dB(A)	41,5	40,4	52,6

1) Value of the static pressure for the model with "P" high-pressure fan customisation option (OCU-CRC060A08-P)


MT/LT	Cooling capacity at				R744				
	ET				-35 °C	-30 °C	-25 °C	-15 °C	-10 °C
OCU-CRC060A08	AT	32 °C	Min - Max	kW	1,2 - 3,0	1,4 - 3,5	1,7 - 4,0	2,3 - 5,3	2,7 - 6,0
		38 °C	Min - Max	kW	1,0 - 2,8	1,2 - 3,2	1,5 - 3,8	2,0 - 4,9	2,3 - 5,5
		43 °C	Min - Max	kW	0,9 - 2,4	1,1 - 2,9	1,3 - 3,4	1,8 - 4,4	2,0 - 4,8

MT/LT	Cooling capacity at				R744				
	ET				-35 °C	-30 °C	-25 °C	-15 °C	-10 °C
OCU-CRC150A08	AT	32 °C	Min - Max	kW	3,0 - 7,3	3,7 - 8,7	4,3 - 10,2	5,9 - 13,5	6,8 - 15,2
		38 °C	Min - Max	kW	2,9 - 7,0	3,3 - 8,3	3,9 - 9,6	5,2 - 12,6	6,0 - 14,0
		43 °C	Min - Max	kW	— — —	3,3 - 7,8	3,8 - 9,0	4,8 - 11,5	5,5 - 12,8

MT	Cooling capacity at				R744			
	ET				—	—	—	—
OCU-CRC210M08	AT	32 °C	Min - Max	kW	—	—	—	—
		38 °C	Min - Max	kW	—	—	—	—
		43 °C	Min - Max	kW	—	—	—	—

MT/LT	Cooling capacity at				R744				
	ET				-35 °C	-30 °C	-25 °C	-15 °C	-10 °C
SCU-CRC150A08	AT	32 °C	Min - Max	kW	3,0 - 7,3	3,7 - 8,7	4,3 - 10,2	5,9 - 13,5	6,8 - 15,2
		38 °C	Min - Max	kW	2,9 - 7,0	3,3 - 8,3	3,9 - 9,6	5,2 - 12,6	6,0 - 14,0
		43 °C	Min - Max	kW	— — —	3,3 - 7,8	3,8 - 9,0	4,8 - 11,5	5,5 - 12,8

CHECK PAGES 28 - 31 FOR A WIDER SELECTION OF ACCESSORIES



NEW! iCO2RE NCU CO₂ Series - R744

Specifications and capacity tables.

Non-housing compact units for small MT/LT commercial applications.

Cost-effective solution with natural refrigerant. Indoor and outdoor installation.


NEWUltra compact
CO₂ solution

R744

MODEL			NCU-CTC018M05*	NCU-CTC009L05*
Compressor			2-stage compressor	2-stage compressor
Refrigerants			R744	R744
PED category			I	I
Application			MT	LT
Power supply	Voltage	V	230 / PE+N (TN-S)	230 / PE+N (TN-S)
	Phase		1	1
	Frequency	Hz	50	50
Evaporation temperature	Min ~ Max	°C	-20 ~ 0	-35 ~ -20
Ambient temperature	Min ~ Max	°C	-20 ~ +43	-20 ~ +43
PS line	Suction	bar	80	80
	Liquid	bar	130	130
Dimensions	W x H x D	mm	750 x 590 x 285	750 x 590 x 285
Weight		kg	45	45
Connections	Suction	Inch (mm)	3/8 {9,52}	3/8 {9,52}
	Liquid	Inch (mm)	1/4 {6,35}	1/4 {6,35}
Maximum recommended pipe distance		m	15	15

*Tentative model name. Panasonic reserves right to change it. Available in Autumn 2026

MT	Cooling capacity at				R744					
	ET				—	—	—	-15 °C	-10 °C	-5 °C
NCU-CTC018M05	AT	32 °C	Min - Max	kW	—	—	—	1,38	1,78	2,02
		38 °C	Min - Max	kW	—	—	—	1,28	1,48	1,78
		43 °C	Min - Max	kW	—	—	—	1,20	1,38	1,46
					Tentative data					
LT	Cooling capacity at				R744					
	ET				-35 °C	-30 °C	-25 °C	—	—	—
NCU-CTC009L05	AT	32 °C	Min - Max	kW	0,71	0,88	1,04	—	—	—
		38 °C	Min - Max	kW	0,65	0,85	0,99	—	—	—
		43 °C	Min - Max	kW	0,49	0,78	0,93	—	—	—

Applications: Small cold rooms / cooling equipment.

Cold rooms.
Conventional usage of
condensing units.



Cooling equipment.
Integrated into cooling
equipment, cabinets, blast
chillers, etc.



**EFFICIENT COMPRESSOR
BY PANASONIC**



**AFFORDABLE
CO₂ SOLUTION**



**MINIMAL
FOOTPRINT**



CHECK PAGES 28 - 31 FOR A WIDER SELECTION OF ACCESSORIES

Customisation options for iC02RE CO₂ range




The series offers customisable models that meet customer requirements.




Customisation options for iC02RE OCU/SCU-CRC Custom-fit CO₂ Series.

- Factory pre-assembled options (customisation options), tested and ready-to-use options list – cutting installation time and reducing labour costs
- Up to 3 customisation options selectable*
- The final model name is composed with the customisation selections

*Available configurations vary by series.

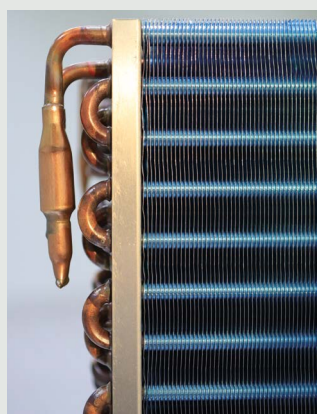

*Blygold gas-cooler coating.

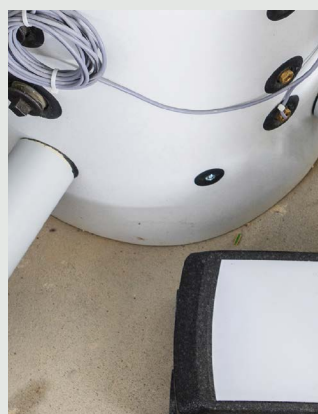

iC02RE OCU/SCU-CRC Custom-fit CO₂ Series – CO₂ condensing units

Series	Application	Base model	Customisation options				Model	
			Coating (C)	Heat recovery (D)	HP Fan (P)	Suction PRV (S)		
OCU-CRC	MT/LT	OCU-CRC060A08	Base model. No options chosen.				OCU-CRC060A08	
			✓	Not available	—	—	OCU-CRC060A08-C	
			—		✓	—	OCU-CRC060A08-P	
			✓		✓	—	OCU-CRC060A08-CP	
		Base model. No options chosen.				OCU-CRC150A08		
		OCU-CRC150A08	✓	—	Not available	—	OCU-CRC150A08-C	
			—	✓		—	OCU-CRC150A08-D	
			—	—		✓	OCU-CRC150A08-S	
			✓	✓		—	OCU-CRC150A08-CD	
			✓	—		✓	OCU-CRC150A08-CS	
	OCU-CRC210M08		Base model. No options chosen.				OCU-CRC210M08	
		✓	Not available	Not available	Not available	OCU-CRC210M08-C		
	SCU-CRC	MT/LT	SCU-CRC150A08	Base model. No options chosen.				SCU-CRC150A08
				✓	—	Standard	Not available	SCU-CRC150A08-C

For customisation options for iC02RE NCU-CTC CO₂ Series, please contact an authorised Panasonic dealer.




High pressure fan ready solution for iC02RE SCU-CRC Custom-fit CO₂ Series.

SCU-CRC150A08 model with high pressure fan for indoor mounting.

A Plug & Play solution designed specifically for indoor installations. This compact unit helps minimise installation time and reduce overall costs compared to central systems with remote condensers.

The high pressure fan feature for indoor mounting (factory-assembled customised option: stronger fan + special flange to connect the air duct to take out the hot air outside the building) is available when ordering a basic model, which was designed for indoor mounting from the very beginning.


Special high pressure fan with 0-90° adjustable angle flange. Choose the most convenient way to connect your exhaust duct on field.

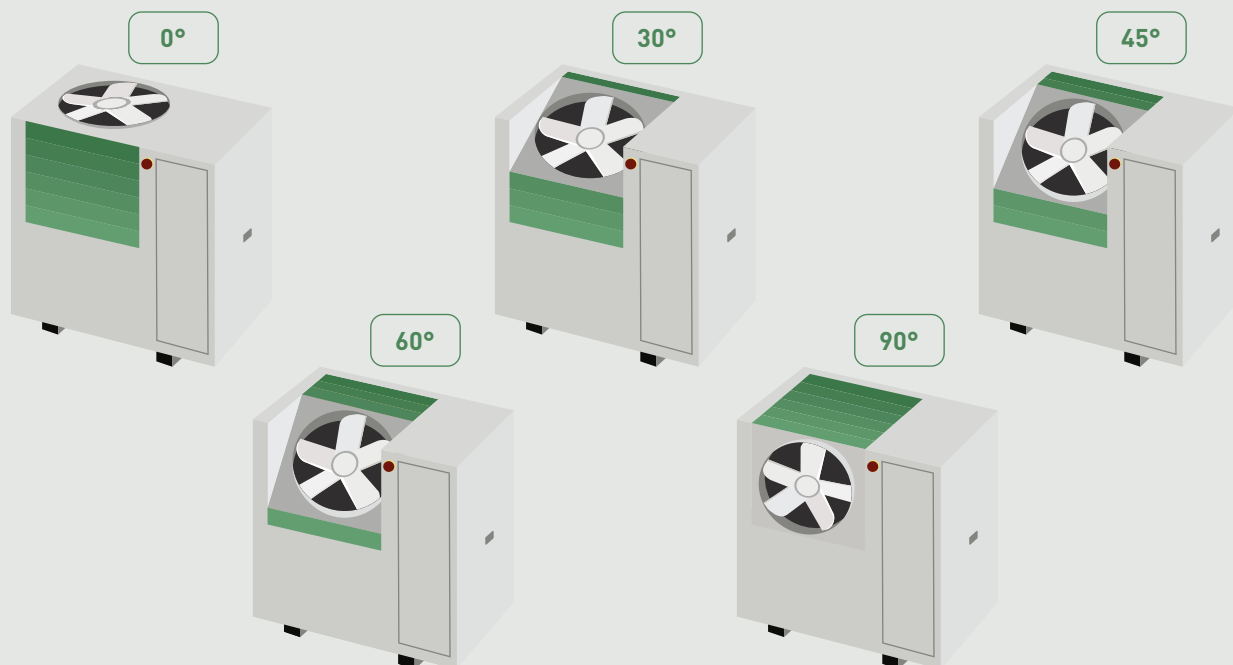

REF PRO DESIGNER.

Think beyond unit selection.

An advanced design tool that supports engineers, installers, and technicians in designing advanced systems for commercial refrigeration installations:
<http://www.panasonicproclub.com>

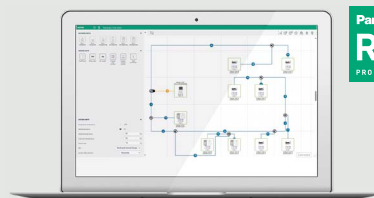

Accessories and control – iC02RE CO₂ range

Control panels and EEV expansion valves



Control panel (Panel-C) with EEV expansion valve included.

Panel-C includes MPXPRO control, stator, probes, etc.

EEV size E2V03CWAC0.	EEV size E2V05CWAC0.	EEV size E2V09CWAC0.	EEV size E2V11CWAC0.	EEV size E2V14CWAC0.	EEV size E2V18CWAC0.	EEV size E2V24CWAC0.	EEV size E3V30CWM00.
-----	-----	-----	-----	-----	-----	-----	-----
KIT-C02-PANEL-C-03	KIT-C02-PANEL-C-05	KIT-C02-PANEL-C-09	KIT-C02-PANEL-C-11	KIT-C02-PANEL-C-14	KIT-C02-PANEL-C-18	KIT-C02-PANEL-C-24	KIT-C02-PANEL-C-30

Cold room management via condensing unit interface - Options 1-2-3 + Cold room display - For OCU/SCU-CRC units

Option 1



Room board for EEV control connection box*.

*Room board for 1×EEV control allows to connect Carel, Danfoss and Saginomiya EEV. Sensors and EEV valve not included.

CZ-C02-EEV-BOX

Option 2



Room board for EEV control connection kit*.

*Room board for 1×EEV control allows to connect Carel, Danfoss and Saginomiya EEV. KIT includes sensors. EEV valve not included.

CZ-C02-EEV-KIT

Option 3



Room board for EEV control connection kit, with sensors and EEV.

EEV size E2V03CWAC0.	EEV size E2V05CWAC0.	EEV size E2V09CWAC0.	EEV size E2V11CWAC0.	EEV size E2V14CWAC0.	EEV size E2V18CWAC0.	EEV size E2V24CWAC0.	EEV size E3V30CWM00.
-----	-----	-----	-----	-----	-----	-----	-----
CZ-C02-EEV-KIT-03	CZ-C02-EEV-KIT-05	CZ-C02-EEV-KIT-09	CZ-C02-EEV-KIT-11	CZ-C02-EEV-KIT-14	CZ-C02-EEV-KIT-18	CZ-C02-EEV-KIT-24	CZ-C02-EEV-KIT-30

Cold room display



Wall-mounted LED display. To be combined with options 1-2-3.

CZ-C02-DISPLAY

CO₂ service checker - For OCU-CR units



CO₂ service checker for commissioning, maintenance and troubleshooting.

PAW-C02-CHECKER

External CO₂ receivers - For OCU/SCU-CRC units



External CO₂ receiver, 24 L 80 bar, Housed (up to 8 kg additional refrigerant volume). Delivered with proper insulation.

CZ-C02-R24L80-H



External CO₂ receiver, 24 L 90 bar, Housed (up to 8 kg additional refrigerant volume). Delivered with proper insulation.

CZ-C02-R24L90-H



External CO₂ receiver, 24 L 80 bar, non-housed (up to 8 kg additional refrigerant volume). Delivered with proper insulation.




CZ-C02-R24L80-E




External CO₂ receiver, 24 L 90 bar, non-housed (up to 8 kg additional refrigerant volume). Delivered with proper insulation.



CZ-C02-R24L90-E

Other accessories

 <p>Service adaptor for vacuum and service (HP and LP port).</p> <p>----- SPK-TU125</p>	 <p>Lubrication oil PZ-68S (0,5L).</p> <p>----- CZ-CO2LBROL500</p>	 <p>Pressure release valve (PRV) 3/8" (9,52) NPT x G 1/2" (12,70) Pset= 60,0 bar.</p> <p>----- PAW-CO2-PRV60</p>	 <p>Pressure release valve (PRV) 3/8" (9,52) NPT x G 1/2" (12,70) Pset= 80,0 bar.</p> <p>----- PAW-CO2-PRV80</p>	 <p>Pressure release valve (PRV) 3/8" (9,52) NPT x G 1/2" (12,70) Pset= 120,0 bar.</p> <p>----- PAW-CO2-PRV120</p>
---	--	--	--	--




<p>Sight glass, 130 bar, 1/4" (6,35) ODS.</p> <p>----- PAW-SGT-GLASS-1/4</p>	<p>Sight glass, 130 bar, 3/8" (9,52) ODS.</p> <p>----- PAW-SGT-GLASS-3/8</p>	<p>Sight glass, 130 bar, 1/2" (12,70) ODS.</p> <p>----- PAW-SGT-GLASS-1/2</p>	<p>Sight glass, 130 bar, 5/8" (15,88) - 16 mm ODS.</p> <p>----- PAW-SGT-GLASS-5/8</p>	<p>Sight glass, 130 bar, 3/4" (19,05) ODS.</p> <p>----- PAW-SGT-GLASS-3/4</p>
---	---	--	--	--



<p>Changeover valve, 3/8" (9,52) NPT x 3/8" (9,52) NPT.</p> <p>----- PAW-CO2-CHANGE-0</p>	<p>Racord 3/8" (9,52) NPT x 3/8" (9,52) ODS (for K65 pipe connection).</p> <p>----- PAW-CO2-RACORD-3/8</p>	<p>Racord 3/8" (9,52) NPT x 1/2" (12,70) ODS (for K65 pipe connection).</p> <p>----- PAW-CO2-RACORD-1/2</p>	<p>Racord 3/8" (9,52) NPT x 5/8" (15,88) ODS (for K65 pipe connection).</p> <p>----- PAW-CO2-RACORD-5/8</p>	<p>Racord, 3/8" (9,52) NPT x 3/4" (19,05) ODS (for K65 pipe connection).</p> <p>----- PAW-CO2-RACORD-3/4</p>
--	---	--	--	---

Spare parts for service and maintenance

 <p>S-006T suction filter, 3/4" (19,05) (outer Ø welding)*.</p> <p>*Sample image – actual product appearance may vary.</p> <p>----- 80203514142000</p>	 <p>S-008T1 suction filter, 3/4" (19,05) (outer Ø welding).</p> <p>----- 80203514139000 (1)</p>	 <p>D-155T filter dryer, 5/8" (15,88) (in Ø welding) (type CO-085-S).</p> <p>----- 80203513180000 (2)</p>	 <p>DCY-P8 165 S filter dryer, 5/8" (16,10) (in Ø welding).</p> <p>----- 80203513187000 (3)</p>
 <p>DCY-P8 306 S filter dryer, 3/4" (19,05) (outer Ø welding).</p> <p>----- 80203513188000</p>	 <p>D-152T filter dryer, 1/4" (6,35) (in Ø welding) (type CO-082-S).</p> <p>----- 80203513179000 (4)</p>	 <p>DCY-P8 093S filter dryer, 3/8" (9,60) (in Ø welding).</p> <p>----- 80203513190000</p>	 <p>DCY-P12 092 S filter dryer, 1/4" (6,40) (in Ø welding).</p> <p>----- 80203513186000 (5)</p>

CHECK THE COMPATIBILITY IN ACCESSORIES COMPATIBILITY – IC02RE CO₂ RANGE TABLE 

Accessories compatibility – iCO2RE CO₂ range

Accessories (can be ordered separately)

Series	OCU-CR							OCU-CRC			SCU-CRC	NCU	
Model	OCU-CR200VF5A	OCU-CR400VF8	OCU-CR400VF8A	OCU-CR1000VF8	OCU-CR1000VF8A	OCU-CR1001VF8A	OCU-CR2000VF8A	OCU-CRC060A08	OCU-CRC150A08	OCU-CRC210M08	SCU-CRC150A08	NCU-CTC018M05	NCU-CTC009L05

Compatibility: • Optional accessory / •• Mandatory accessory / ••• One pc. always included as standard with the unit.

Control panels and EEV expansion valves kit

Panel-C + MPXPRO, stator, probes, etc + EEV E2V03CWAC0.	KIT-C02-PANEL-C-03	•	•	•	•	•	•	•	•	•	•	•	•
Panel-C + MPXPRO, stator, probes, etc + EEV E2V05CWAC0.	KIT-C02-PANEL-C-05	•	•	•	•	•	•	•	•	•	•	•	•
Panel-C + MPXPRO, stator, probes, etc + EEV E2V09CWAC0.	KIT-C02-PANEL-C-09	•	•	•	•	•	•	•	•	•	•	•	•
Panel-C + MPXPRO, stator, probes, etc + EEV E2V11CWAC0.	KIT-C02-PANEL-C-11	•	•	•	•	•	•	•	•	•	•	•	•
Panel-C + MPXPRO, stator, probes, etc + EEV E2V14CWAC0.	KIT-C02-PANEL-C-14	•	•	•	•	•	•	•	•	•	•	•	•
Panel-C + MPXPRO, stator, probes, etc + EEV E2V18CWAC0.	KIT-C02-PANEL-C-18	•	•	•	•	•	•	•	•	•	•	•	•
Panel-C + MPXPRO, stator, probes, etc + EEV E2V24CWAC0.	KIT-C02-PANEL-C-24	•	•	•	•	•	•	•	•	•	•	•	•
Panel-C + MPXPRO, stator, probes, etc + EEV E3V30CWM00.	KIT-C02-PANEL-C-30	•	•	•	•	•	•	•	•	•	•	•	•

Cold room management via condensing unit interface - Options 1-2-3 + Cold room display

Option 1

Room board for EEV control connection box.	CZ-C02-EEV-BOX								•	•	•	•	
--	----------------	--	--	--	--	--	--	--	---	---	---	---	--

Option 2

Room board for EEV control connection kit.	CZ-C02-EEV-KIT								•	•	•	•	
--	----------------	--	--	--	--	--	--	--	---	---	---	---	--

Option 3

Room board for EEV control connection kit, with sensors and EEV, E2V03CWAC0.	CZ-C02-EEV-KIT-03								•	•	•	•	
Room board for EEV control connection kit, with sensors and EEV, E2V05CWAC0.	CZ-C02-EEV-KIT-05								•	•	•	•	
Room board for EEV control connection kit, with sensors and EEV, E2V09CWAC0.	CZ-C02-EEV-KIT-09								•	•	•	•	
Room board for EEV control connection kit, with sensors and EEV, E2V11CWAC0.	CZ-C02-EEV-KIT-11								•	•	•	•	
Room board for EEV control connection kit, with sensors and EEV, E2V14CWAC0.	CZ-C02-EEV-KIT-14								•	•	•	•	
Room board for EEV control connection kit, with sensors and EEV, E2V18CWAC0.	CZ-C02-EEV-KIT-18								•	•	•	•	
Room board for EEV control connection kit, with sensors and EEV, E2V24CWAC0.	CZ-C02-EEV-KIT-24								•	•	•	•	
Room board for EEV control connection kit, with sensors and EEV, E3V30CWM00.	CZ-C02-EEV-KIT-30								•	•	•	•	

Cold room display

Wall-mounted LED display. To be combined with options 1-2-3.	CZ-C02-DISPLAY								•	•	•	•	
--	----------------	--	--	--	--	--	--	--	---	---	---	---	--

Oil

CO ₂ Lubrication oil PZ-68S (0,5L).	CZ-C02LBROL500	•	•	•	•	•	•	•	•	•	•	•	•
--	----------------	---	---	---	---	---	---	---	---	---	---	---	---

Pressure release valves (PRV) for K65

Pressure release valve (PRV) Pset= 60,0 bar (PRV for suction line all units*). *For OCU-CRC units a suction PRV is available also as customisation option.	PAW-C02-PRV60	•	•	•	•	•	•	•	•	•	•	•	•
Pressure release valve (PRV) Pset= 80,0 bar (PRV for suction line all units* or for liquid receiver for OCU-CR400VF8(A), OCU-CR1000VF8(A), OCU-CR1001VF8A and OCU-CR2000VF8A). *For OCU-CRC units a suction PRV is available also as customisation option.	PAW-C02-PRV80	•	•	•	•	•	•	•	•	•	•	•	•
Pressure release valve (PRV) Pset= 120,0 bar (PRV for liquid receiver for OCU-CR200VF5A) and all NCU-CTC models.	PAW-C02-PRV120	•										•	•
Changeover valve for dual PRV connection.	PAW-C02-CHANGE-0	•	•	•	•	•	•	•	•	•	•	•	•

Accessories (can be ordered separately)

Series	OCU-CR							OCU-CRC			SCU-CRC	NCU	
Model	OCU-CR200VF5A	OCU-CR400VF8	OCU-CR400VF8A	OCU-CR1000VF8	OCU-CR1000VF8A	OCU-CR1001VF8A	OCU-CR2000VF8A	OCU-CRC060A08	OCU-CRC150A08	OCU-CRC210M08	SCU-CRC150A08	NCU-CTC018M05	NCU-CTC009L05

Compatibility: • Optional accessory / •• Mandatory accessory / ••• One pc. always included as standard with the unit.

Records for PRV and for K65 pipe

Racord 3/8 [9,52] NPT x 3/8 [9,52] ODS (for K65 pipe connection).	PAW-C02-RACORD-3/8	•	•	•	•	•	•	•	•	•	•	•	•
Racord 3/8 [9,52] NPT x 1/2 [12,70] ODS (for K65 pipe connection).	PAW-C02-RACORD-1/2	•	•	•	•	•	•	•	•	•	•		
Racord 3/8 [9,52] NPT x 5/8 [15,88] ODS (for K65 pipe connection).	PAW-C02-RACORD-5/8		•	•	•	•	•	•	•	•	•		
Racord, 3/8 [9,52] NPT x 3/4 [19,05] ODS (for K65 pipe connection).	PAW-C02-RACORD-3/4				•	•	•		•	•	•		

Sight glass for K65 pipe

Sight glass, 130 bar, 1/4 [6,35] ODS.	PAW-SGT-GLASS-1/4	•	•	•	•	•	•	•	•	•	•	•	•
Sight glass, 130 bar, 3/8 [9,52] ODS.	PAW-SGT-GLASS-3/8	•	•	•	•	•	•	•	•	•	•		
Sight glass, 130 bar, 1/2 [12,70] ODS.	PAW-SGT-GLASS-1/2	•	•	•	•	•	•	•	•	•	•		
Sight glass, 130 bar, 5/8 [15,88] - 16 mm ODS.	PAW-SGT-GLASS-5/8		•	•	•	•	•	•	•	•	•		
Sight glass, 130 bar, 3/4 [19,05] ODS.	PAW-SGT-GLASS-3/4				•	•	•		•	•	•		

External CO₂ receivers for K65

External CO ₂ receiver, 24 L 80 bar, Housed.	CZ-C02-R24L80-H								•	•		•	
External CO ₂ receiver, 24 L 90 bar, Housed.	CZ-C02-R24L90-H									•			
External CO ₂ receiver, 24 L 80 bar, non-housed.	CZ-C02-R24L80-E								•	•		•	
External CO ₂ receiver, 24 L 90 bar, non-housed.	CZ-C02-R24L90-E									•			

Service accessories

CO ₂ service checker for commissioning, maintenance and troubleshooting.	PAW-C02-CHECKER	•	•	•	•	•	•	•					
Service pipe adaptor* for vacuum and service (HP and LP port) ¹⁾ . 2 pcs. are recommended for OCU-CR2000VF8A. *OCU/SCU-CRC units include the service connection valves in standard.	SPK-TU125	••	••	••	••	••		••					
Service valve adaptor* ¹⁾ . *OCU/SCU-CRC units include the service connection valves in standard.	80223307145000	•••	•••	•••	•••	•••	•••	•••					
S-006T suction filter, 3/4 [19,05] (outer Ø welding).	80203514142000		•••	•••			•••		••				
S-008T1 suction filter, 3/4 [19,05] (outer Ø welding).	80203514139000 (1)				•••	•••		•••		••	••	••	
D-155T filter dryer, 5/8 [15,88] (in Ø welding) (type CO-085-S).	80203513180000 (2)				•••	•••							
DCY-P8 165 S filter dryer, 5/8 [16,10] (in Ø welding).	80203513187000 (3)				•••	•••	•••						
D-152T filter dryer, 1/4 [6,35] (in Ø welding) (type CO-082-S).	80203513179000 (4)	•••											
DCY-P8 093S filter dryer, 3/8 [9,60] (in Ø welding).	80203513190000		•••	•••									
DCY-P8 306 S filter dryer, 3/4 [19,05] (outer Ø welding).	80203513188000						•••						
DCY-P12 092 S filter dryer, 1/4 [6,40] (in Ø welding).	80203513186000 (5)	•••											

¹⁾ After Summer 2026, the service pipe adaptor accessory will be replaced by the service valve adaptor delivered in standard of all OCU-CR units.

Compatibility relationship: (2) and (3) are compatible; (4) and (5) are compatible; (2) and (4) until end of stock.

*Accessories compatibility data for OCU-CR1001VF8A, NCU-CTC018M05 and NCU-CTC009L05 is tentative.

CHECK THE FULL DESCRIPTION IN ACCESSORIES AND CONTROL – IC02RE CO₂ RANGE TABLE 

iCOOL A2L and HFC/HFO range – Inverter solutions for today and tomorrow

iCOOL

INVERTER

Panasonic's iCOOL range is built on flexibility and performance. iCOOL range units operate with HFO and HFC refrigerants – including next-generation A2L options with low Global Warming Potential (GWP) – providing a reliable bridge between today's needs and tomorrow's environmental goals.





Designed for high energy efficiency, each unit helps reduce operational costs and environmental impact while ensuring reliable, high-performance operation.

iCOOL range is the smart choice for a market in transition – delivering future-ready innovation without compromising the needs of today.



EASY ONLINE SELECTION



EASY INSTALLATION



EASY COMMISSIONING



EASY MAINTENANCE



LOW NOISE



43 °C AMBIENT TEMPERATURE UP TO 43 °C

1 Easy Selection

- Online selection software
- Support to select the best HFC or A2L solution for any application

4 Easy commissioning

- Less than 3 minutes
- Local language assistance
- 100% functionally tested

2 Easy installation

- Lightweight units
- Integrated options from factory
- Flexible and fast delivery

5 Advanced control

- Simple user interface
- Smooth start and stop function
- Working envelope control
- Oil return function

3 Easy maintenance

- 180° access to all components
- ModBus ready

iCOOL is the modular solution of Inverter condensing unit that saves you time during installation and commissioning, as the unit is factory customised to your needs.

Thanks to its large modulation capacity and its multi-refrigerant compliance, it can be used for any commercial refrigeration application providing service down to a minimum of 500 W for a single evaporator.

With a very simple user interface, low energy consumption, fast commissioning and easy maintenance, iCOOL is the perfect solution for convenience stores, restaurant cold rooms, fuel stations, food stores, milk cooling and ice making equipment.



iCOOL SE Series - A2L and HFC/HFO condensing units



Inverter technology at the cost of ON / OFF.



iCOOL SE Series - A2L and HFC/HFO condensing units - Simple Engineering solution.

From 2,5 to 10,0 kW MT and from 1,2 to 3,0 kW LT.

Easy to install, with a simplified commissioning process. Inverter technology has never been this easy.

Save time and operation cost with our energy efficient units based on Inverter compressors.

- Similar investment cost and significant energy savings vs. ON / OFF technology
- Full BLDC Inverter technology
- Dedicated PLC controller
- Low noise operation
- Suitable for multi-evaporator applications (MT models)
- Designed and manufactured in Europe



NEW! iCOOL SE A2L-ready - OCU-LRE Series.

Upgrade of the entire existing range of iCOOL SE HFC - OCU-KRE Series to meet the A2L requirements.

- Multi-refrigerant compatibility (install today with HFC, retrofit to A2L after the new F-gas ban dates)
- A2L safety components (additional compressor's compartment ventilation fan + differential air-pressure switch + isolated e-box)

A2L refrigerants are a class of low Global Warming Potential (GWP) gases that serve as alternatives to traditional HFCs, offering mild flammability and low toxicity.

*Available in Summer 2026.



A2L R454C	A2L R455A	R448A	R449A	R134a	R513A
--------------	--------------	-------	-------	-------	-------

NEW! iCOOL SE Series – OCU-LRE/LRC – A2L-ready MT models - R454C / R455A / R448A / R449A / R134a / R513A

Specifications and capacity tables.

 A2L
READY

NEW



Model			OCU-LRE025M05*	OCU-LRE045M05*	OCU-LRE070M05*	OCU-LRC100M08
Compressor			Single Inverter compressor	Single Inverter compressor	Single Inverter compressor	Single Inverter compressor
Compatible refrigerants			R454C, R455A, R448A, R449A, R134a, R513A	R454C, R455A, R448A, R449A, R134a, R513A	R454C, R455A, R448A, R449A, R134a, R513A	R454C, R455A, R448A, R449A, R134a, R513A
PED category			I	I	I	III
Application			MT	MT	MT	MT
Cooling capacity at ET -35 °C AT 32 °C, R454C	Min ~ Max	kW	—	—	—	—
Cooling capacity at ET -10 °C AT 32 °C, R454C	Min ~ Max	kW	0,5 - 2,4	1,2 - 4,2	1,9 - 5,3	1,7 - 7,8
SEPR freezing at ET -35 °C AT 32 °C			TBC	TBC	TBC	TBC
SEPR cooling at ET -10 °C AT 32 °C			TBC	TBC	TBC	TBC
Annual electricity consumption at ET -35 °C AT 32 °C			TBC	TBC	TBC	TBC
Annual electricity consumption at ET -10 °C AT 32 °C			TBC	TBC	TBC	TBC
COP at ET -35°C, AT 32 °C			TBC	TBC	TBC	TBC
COP at ET -10°C, AT 32 °C			TBC	TBC	TBC	TBC
Nominal operating current at ET -10 °C MT / -30 °C LT AT 32 °C and 230 - 400 V 50 Hz		A	6,7	11,9	14,7	8,7
Maximum operating current (in the most loaded phase at 230 - 400 V 50 Hz)		A	7,9	13,5	17,4	11,7
Maximum power consumption		kW	1,6	2,8	3,6	5,2
Dimensions W x H x D		mm	1000 x 605 x 450	1000 x 605 x 450	1100 x 805 x 450	1286 x 858 x 471
Weight		kg	75	75	85	170
Sound level at 10 m		dB(A)	42,5	42,5	42,5	39,0
Condenser	Fans x diameter	mm	1x450	1x450	1x500	1x710
	Air flow	m³/h	3600	3600	5200	6700
	Fan power supply	V / ph / Hz	220 - 240 / 1 / 50	220 - 240 / 1 / 50	220 - 240 / 1 / 50	220 - 277 / 1 / 50
	Fan power consumption	W	170	170	230	280
	Nominal fan current	A	1,4	1,4	2,1	1,2
Compressor	Model		C-6RVN63L0B	C-7RVN113L0B	C-7RVN153L0B	C-8RZ420L4AAL
	Volumetric flow	m³/h	0,6 - 4,1	1,25 - 7,5	1,7 - 10,4	2,3 - 15,1
	Rotation range	rps	30 - 90	30 - 90	30 - 90	20 - 90
	Current	Full load amperage	A	4	7,6	9,4
		Peak current limit / Locked rotor amperage	A	15 / —	25 / —	25 / —
	Oil type		FV68S	FV68S	FV68S	FV68S (PVE)
	Oil compressor charge	dm³	0,6	0,7	0,7	1,35 + 0,6
	Crankcase heater power consumption	W	35	35	35	35
Connections	Suction	Inch	1/2	5/8	3/4	7/8
	Liquid	Inch	3/8	3/8	3/8	1/2
Liquid receiver		dm³	3,9	3,9	5,3	10,0
CU power supply	Voltage	V / ph / Hz	220 - 240 / 1 / 50	220 - 240 / 1 / 50	220 - 240 / 1 / 50	3x400/50 PE+N (TN-S)
	Recommended minimum cable cross-section	mm²	3x2,5	3x2,5	3x2,5	5x4,0
	Recommended minimum protection		C16	C20	C20	C25
Maximum recommended pipe distance		m	30	30	30	40
Maximum height distance	Evaporator above	m	7	7	7	12
	Evaporator below	m	7	7	7	12
Which pipes needs to be insulated		Suction / liquid / both	Suction	Suction	Suction	Suction
Recommended insulation thickness		mm	13	13	13	13
Maximum quantity of evaporators connected		Qty.	3	3	3	7
Evaporation temperature	Min ~ Max	°C	-15 ~ 0	-15 ~ 0	-15 ~ 0	-15 ~ 5
Ambient temperature	Min ~ Max	°C	-20 ~ 43	-20 ~ 43	-20 ~ 43	-20 ~ 43

*Available in Summer 2026.

+ CHECK PAGE 57 FOR A SELECTION OF ACCESSORIES



NEW! iCOOL SE Series – OCU-LRE – A2L-ready LT models - R454C / R455A / R448A / R449A

Specifications and capacity tables.

NEW

 A2L
READY


Model			OCU-LRE012L05*	OCU-LRE022L05*	OCU-LRE030L05*
Compressor			Single Inverter compressor	Single Inverter compressor	Single Inverter compressor
Compatible refrigerants			R454C, R455A, R448A, R449A	R454C, R455A, R448A, R449A	R454C, R455A, R448A, R449A
PED category			I	I	I
Application			LT	LT	LT
Cooling capacity at ET -35 °C AT 32 °C, R454C	Min – Max	kW	0,1 - 0,7	0,4 - 1,5	0,6 - 1,8
Cooling capacity at ET -10 °C AT 32 °C, R454C	Min – Max	kW	—	—	—
SEPR freezing at ET -35 °C AT 32 °C			TBC	TBC	TBC
SEPR cooling at ET -10 °C AT 32 °C			TBC	TBC	TBC
Annual electricity consumption at ET -35 °C AT 32 °C		kWh/a	TBC	TBC	TBC
Annual electricity consumption at ET -10 °C AT 32 °C		kWh/a	TBC	TBC	TBC
COP at ET -35°C, AT 32 °C			TBC	TBC	TBC
COP at ET -10°C, AT 32 °C			TBC	TBC	TBC
Nominal operating current at ET -10 °C MT / -30 °C LT AT 32 °C and 230 - 400 V 50 Hz		A	5,5	9,5	12,4
Maximum operating current (in the most loaded phase at 230 - 400 V 50 Hz)		A	7,2	12,7	17
Maximum power consumption		kW	1,4	2,6	3,6
Dimensions W x H x D		mm	1000 x 605 x 450	1000 x 605 x 450	1000 x 605 x 450
Weight		kg	75	75	75
Sound level at 10 m		dB(A)	42,5	42,5	42,5
Condenser	Fans x diameter	mm	1x450	1x450	1x450
	Air flow	m³/h	3600	3600	3600
	Fan power supply	V / ph / Hz	220 - 240 / 1 / 50	220 - 240 / 1 / 50	220 - 240 / 1 / 50
	Fan power consumption	W	170	170	170
	Nominal fan current	A	1,4	1,4	1,4
Compressor	Model		C-6RVN63L0B	C-7RVN113L0B	C-7RVN153L0B
	Volumetric flow	m³/h	0,6 - 4,1	1,25 - 7,5	1,7 - 10,4
	Rotation range	rps	30 - 90	30 - 90	30 - 90
	Current	Full load amperage	A	3,6	7,1
		Peak current limit / Locked rotor amperage	A	15 / —	25 / —
	Oil type		FV68S	FV68S	FV68S
	Oil compressor charge	dm³	0,6	0,7	0,7
Connections	Crankcase heater power consumption	W	35	35	35
	Suction	Inch	1/2	5/8	3/4
Liquid receiver	Liquid	Inch	3/8	3/8	3/8
		dm³	3,9	3,9	3,9
CU power supply	Voltage	V / ph / Hz	220 - 240 / 1 / 50	220 - 240 / 1 / 50	220 - 240 / 1 / 50
	Recommended minimum cable cross-section	mm²	3x2,5	3x2,5	3x2,5
	Recommended minimum protection		C16	C20	C20
Maximum recommended pipe distance		m	20	20	20
Maximum height distance	Evaporator above	m	7	7	7
	Evaporator below	m	7	7	7
Which pipes needs to be insulated	Suction / liquid / both		Suction	Suction	Suction
Recommended insulation thickness		mm	19	19	19
Maximum quantity of evaporators connected		Qty.	3	3	3
Evaporation temperature	Min – Max	°C	-35 ~ -15	-35 ~ -15	-35 ~ -15
Ambient temperature	Min – Max	°C	-20 ~ 43	-20 ~ 43	-20 ~ 43

*Available in Autumn 2026.

+ CHECK PAGE 57 FOR A SELECTION OF ACCESSORIES



iCOOL SE Series – OCU-LRE/LRC – A2L ready models · R454C / R455A / R448A / R449A / R134a / R513A

Specifications and capacity tables.

A2L
READY

MT	Cooling capacity at			R454C			R455A			R449A/R448A			R134a/R513A		
	ET			-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
OCU-LRE025M05	32 °C	Min - Max	kW	0,4 - 2	0,5 - 2,4	0,6 - 2,8	TBC	TBC	TBC	0,7 - 2,1	0,8 - 2,6	1,0 - 3,0	0,4 - 1,2	0,5 - 1,5	0,6 - 1,8
	38 °C	Min - Max	kW	0,4 - 1,8	0,5 - 2,1	0,6 - 2,6	TBC	TBC	TBC	0,6 - 2,0	0,8 - 2,4	0,9 - 2,7	0,3 - 1,1	0,4 - 1,3	0,5 - 1,7
	43 °C	Min - Max	kW	0,3 - 1,6	0,4 - 1,9	0,5 - 2,4	TBC	TBC	TBC	0,6 - 1,8	0,7 - 2,0	0,8 - 2,2	0,3 - 1,0	0,4 - 1,2	0,5 - 1,5

MT	Cooling capacity at			R454C			R455A			R449A/R448A			R134a/R513A		
	ET			-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
OCU-LRE045M05	32 °C	Min - Max	kW	1,0 - 3,6	1,2 - 4,2	1,4 - 5	1,1 - 3,7	1,3 - 4,4	1,6 - 5,2	1,3 - 3,9	1,6 - 4,6	1,9 - 5,4	0,7 - 2,2	0,9 - 2,7	1,1 - 3,4
	38 °C	Min - Max	kW	0,9 - 3,2	1,1 - 3,9	1,3 - 4,6	1,0 - 3,4	1,3 - 4,0	1,5 - 4,7	1,2 - 3,7	1,5 - 4,1	1,8 - 4,6	0,6 - 2,0	0,8 - 2,5	1,0 - 3,1
	43 °C	Min - Max	kW	0,8 - 3,0	1,0 - 3,6	1,2 - 4,3	1,0 - 3,0	1,2 - 3,6	1,4 - 4,3	1,2 - 3,0	1,4 - 3,1	1,7 - 3,4	0,6 - 1,8	0,7 - 2,3	0,9 - 2,8

MT	Cooling capacity at			R454C			R455A			R449A/R448A			R134a/R513A		
	ET			-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
OCU-LRE070M05	AT 32 °C	Min - Max	kW	1,6 - 4,4	1,9 - 5,3	2,3 - 6,3	TBC	TBC	TBC	1,9 - 5,5	2,3 - 6,6	2,8 - 7,6	0,9 - 3,1	1,2 - 3,9	1,5 - 4,8
	AT 38 °C	Min - Max	kW	1,4 - 4,0	1,7 - 4,8	2,1 - 5,7	TBC	TBC	TBC	1,8 - 5,0	2,2 - 6,0	2,6 - 6,8	0,9 - 2,8	1,1 - 3,5	1,4 - 4,4
	AT 43 °C	Min - Max	kW	1,3 - 3,7	1,6 - 4,5	2,0 - 5,3	TBC	TBC	TBC	1,7 - 4,6	2,0 - 5,3	2,4 - 5,9	0,8 - 2,6	1,0 - 3,3	1,3 - 4,0

MT	Cooling capacity at			R454C			R455A			R449A/R448A			R134a/R513A		
	ET			-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
OCU-LRC100M08	32 °C	Min - Max	kW	1,4 - 6,4	1,7 - 7,8	2,0 - 9,3	1,5 - 7,5	1,8 - 8,8	2,2 - 10,3	1,6 - 7,7	2,0 - 9,3	2,4 - 11,1	1,0 - 4,8	1,2 - 5,9	1,5 - 7,1
	38 °C	Min - Max	kW	1,3 - 6,0	1,6 - 7,3	1,9 - 8,7	1,5 - 6,8	1,7 - 8,1	2,1 - 9,5	1,5 - 7,1	1,9 - 8,6	2,3 - 10,3	0,9 - 4,4	1,1 - 5,4	1,4 - 6,6
	43 °C	Min - Max	kW	1,2 - 5,7	1,5 - 6,8	1,8 - 8,0	1,4 - 6,2	1,6 - 7,4	1,9 - 8,8	1,4 - 6,6	1,8 - 8,0	2,1 - 9,6	0,8 - 4,1	1,0 - 5,0	1,3 - 6,1

LT	Cooling capacity at			R454C			R455A			R449A/R448A		
	ET			-35 °C	-30 °C	-25 °C	-35 °C	-30 °C	-25 °C	-35 °C	-30 °C	-25 °C
OCU-LRE012L05	32 °C	Min - Max	kW	0,1 - 0,7	0,2 - 1,0	0,3 - 1,3	TBC	TBC	TBC	0,3 - 1,0	0,4 - 1,2	0,5 - 1,5
	38 °C	Min - Max	kW	0,1 - 0,6	0,2 - 0,9	0,2 - 1,2	TBC	TBC	TBC	0,3 - 0,9	0,3 - 1,1	0,4 - 1,4
	43 °C	Min - Max	kW	0,1 - 0,6	0,2 - 0,8	0,2 - 1,1	TBC	TBC	TBC	0,2 - 0,8	0,3 - 1,0	0,4 - 1,3


LT	Cooling capacity at			R454C			R455A			R449A/R448A		
	ET			-35 °C	-30 °C	-25 °C	-35 °C	-30 °C	-25 °C	-35 °C	-30 °C	-25 °C
OCU-LRE022L05	32 °C	Min - Max	kW	0,4 - 1,5	0,5 - 1,9	0,7 - 2,4	0,4 - 1,5	0,5 - 2,0	0,7 - 2,5	0,6 - 1,8	0,7 - 2,2	0,9 - 2,8
	38 °C	Min - Max	kW	0,3 - 1,3	0,4 - 1,7	0,6 - 2,2	0,4 - 1,4	0,5 - 1,9	0,7 - 2,3	0,5 - 1,6	0,7 - 2,0	0,8 - 2,5
	43 °C	Min - Max	kW	0,3 - 1,2	0,4 - 1,6	0,5 - 2,0	0,4 - 1,3	0,5 - 1,7	0,6 - 2,1	0,5 - 1,5	0,6 - 1,9	0,8 - 2,3

LT	Cooling capacity at			R454C			R455A			R449A/R448A		
	ET			-35 °C	-30 °C	-25 °C	-35 °C	-30 °C	-25 °C	-35 °C	-30 °C	-25 °C
OCU-LRE030L05	32 °C	Min - Max	kW	0,6 - 1,8	0,8 - 2,3	1,0 - 2,9	TBC	TBC	TBC	0,8 - 2,4	1,0 - 2,9	1,3 - 3,6
	38 °C	Min - Max	kW	0,6 - 1,6	0,8 - 2,1	0,9 - 2,6	TBC	TBC	TBC	0,7 - 2,2	0,9 - 2,7	1,2 - 3,3
	43 °C	Min - Max	kW	0,5 - 1,5	0,7 - 1,9	0,9 - 2,4	TBC	TBC	TBC	0,7 - 2,0	0,9 - 2,4	1,1 - 3,0

REF PRO DESIGNER.

Think beyond unit selection.

An advanced design tool that supports engineers, installers, and technicians in designing advanced systems for commercial refrigeration installations:
<http://www.panasonicproclub.com>

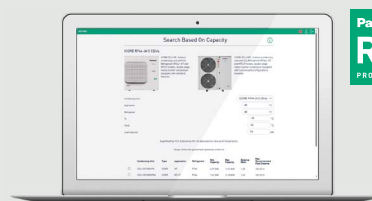
Panasonic
REF
 PRO DESIGNER


iCOOL SE Series – OCU-KRE – HFC/HFO models · R448A / R449A / R134a / R513A

Specifications and capacity tables.



Model	OCU-	KRE025M05	KRE045M05	KRE070M05	KRE012L05	KRE022L05	KRE030L05
Compressor		Single Inverter compressor	Single Inverter compressor	Single Inverter compressor	Single Inverter compressor	Single Inverter compressor	Single Inverter compressor
Compatible refrigerants		R448A, R449A, R134a, R513A	R448A, R449A, R134a, R513A	R448A, R449A, R134a, R513A	R448A, R449A	R448A, R449A	R448A, R449A
PED category		I	I	I	I	I	I
Application		MT	MT	MT	LT	LT	LT
Cooling capacity at ET -35 °C AT 32 °C	Min – Max	kW	—	—	0,3 - 1,0	0,6 - 1,8	0,8 - 2,4
Cooling capacity at ET -10 °C AT 32 °C	Min – Max	kW	0,8 - 2,6	1,6 - 4,6	2,3 - 6,6	—	—
SEPR freezing at ET -35 °C AT 32 °C (R448A)		—	—	—	—	—	2,14
SEPR cooling at ET -10 °C AT 32 °C (R448A-OCU-K, R455A-OCU-L)		—	—	3,80	—	—	—
Annual electricity consumption at ET -35 °C AT 32 °C (R448A)	kWh/a	—	—	—	—	—	8475
Annual electricity consumption at ET -10 °C AT 32 °C (R448A-OCU-K, R455A-OCU-L)	kWh/a	—	—	10749	—	—	—
COP at ET -35°C, AT 32 °C (R448A)		—	—	—	0,95	0,98	—
COP at ET -10°C, AT 32 °C (R448A)		1,88	1,89	—	—	—	—
Nominal operating current at ET -10 °C MT / -30 °C LT AT 32 °C and 230 - 400 V 50 Hz	A	6,7	11,9	14,7	5,5	9,5	12,4
Maximum operating current (in the most loaded phase at 230 - 400 V 50 Hz)	A	7,9	13,5	17,4	7,2	12,7	17
Maximum power consumption	kW	1,6	2,8	3,6	1,4	2,6	3,6
Dimensions W x H x D	mm	1000x605x450	1000x605x450	1100x805x450	1000x605x450	1000x605x450	1000x605x450
Weight	kg	70	70	80	70	70	80
Sound level at 10 m	dB(A)	42,5	42,5	42,5	42,5	42,5	42,5
Condenser	Fans x diameter	mm	1x450	1x450	1x500	1x450	1x450
	Air flow	m³/h	3600	3600	5200	3600	3600
	Fan power supply	V / ph / Hz	220 - 240 / 1/50	220 - 240 / 1/50	220 - 240 / 1/50	220 - 240 / 1/50	220 - 240 / 1/50
	Fan power consumption	W	170	170	230	170	170
	Nominal fan current	A	1,4	1,4	2,1	1,4	1,4
Compressor	Model		C-6RVN63L0B	C-7RVN113L0B	C-7RVN153L0B	C-6RVN63L0B	C-7RVN113L0B
	Volumetric flow	m³/h	0,6 - 4,1	1,25 - 7,5	1,7 - 10,4	0,6 - 4,1	1,25 - 7,5
	Rotation range	rps	30 - 90	30 - 90	30 - 90	30 - 90	30 - 90
	Full load amperage	A	4	7,6	9,4	3,6	7,1
	Current	Peak current limit / Locked rotor amperage	A	15 / —	25 / —	25 / —	25 / —
	Oil type		FV68S	FV68S	FV68S	FV68S	FV68S
	Oil compressor charge	dm³	0,6	0,7	0,7	0,6	0,7
Connections	Crankcase heater power consumption	W	35	35	35	35	35
	Suction	Inch	1/2	5/8	3/4	1/2	5/8
	Liquid	Inch	3/8	3/8	3/8	3/8	3/8
Liquid receiver		dm³	3,9	3,9	5,3	3,9	3,9
CU power supply	Voltage	V / ph / Hz	220 - 240 / 1/50	220 - 240 / 1/50	220 - 240 / 1/50	220 - 240 / 1/50	220 - 240 / 1/50
	Recommended minimum cable cross-section	mm²	3x2,5	3x2,5	3x2,5	3x2,5	3x2,5
	Recommended minimum protection		C16	C20	C20	C16	C20
Maximum recommended pipe distance		m	30	30	30	20	20
Maximum height distance	Evaporator above	m	7	7	7	7	7
	Evaporator below	m	7	7	7	7	7
Which pipes needs to be insulated	Suction / liquid / both		Suction	Suction	Suction	Suction	Suction
Recommended insulation thickness		mm	13	13	13	19	19
Maximum quantity of evaporators connected		Qty.	3	3	3	3	3
Evaporation temperature	Min – Max	°C	-15 ~ 0	-15 ~ 0	-15 ~ 0	-35 ~ -15	-35 ~ -15
Ambient temperature	Min – Max	°C	-20 ~ 43	-20 ~ 43	-20 ~ 43	-20 ~ 43	-20 ~ 43

**CHECK PAGE 57 FOR A SELECTION OF ACCESSORIES**HIGH EFFICIENCY
COMPRESSOR

SUPER QUIET

43 °C
AMBIENT
TEMPERATURE

AUTOMATIC FAN

BMS
CONNECTIVITY

iCOOL SE Series – OCU-KRE – HFC/HFO models - R448A / R449A / R134a / R513A

Specifications and capacity tables.

MT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
OCU-KRE025M05	AT	32 °C	Min - Max	kW	0,7 - 2,1	0,8 - 2,6	1,0 - 3,0	0,4 - 1,2	0,5 - 1,5	0,6 - 1,8
		38 °C	Min - Max	kW	0,6 - 2,0	0,8 - 2,4	0,9 - 2,7	0,3 - 1,1	0,4 - 1,3	0,5 - 1,7
		43 °C	Min - Max	kW	0,6 - 1,8	0,7 - 2,0	0,8 - 2,2	0,3 - 1,0	0,4 - 1,2	0,5 - 1,5

MT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
OCU-KRE045M05	AT	32 °C	Min - Max	kW	1,3 - 3,9	1,6 - 4,6	1,9 - 5,4	0,7 - 2,2	0,9 - 2,7	1,1 - 3,4
		38 °C	Min - Max	kW	1,2 - 3,7	1,5 - 4,1	1,8 - 4,6	0,6 - 2,0	0,8 - 2,5	1,0 - 3,1
		43 °C	Min - Max	kW	1,2 - 3,0	1,4 - 3,1	1,7 - 3,4	0,6 - 1,8	0,7 - 2,3	0,9 - 2,8

MT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
OCU-KRE070M05	AT	32 °C	Min - Max	kW	1,9 - 5,5	2,3 - 6,6	2,8 - 7,6	0,9 - 3,1	1,2 - 3,9	1,5 - 4,8
		38 °C	Min - Max	kW	1,8 - 5,0	2,2 - 6,0	2,6 - 6,8	0,9 - 2,8	1,1 - 3,5	1,4 - 4,4
		43 °C	Min - Max	kW	1,7 - 4,6	2,0 - 5,3	2,4 - 5,9	0,8 - 2,6	1,0 - 3,3	1,3 - 4,0

LT	Cooling capacity at				R449A/R448A					
	ET				-35 °C	-30 °C	-25 °C			
OCU-KRE012L05	AT	32 °C	Min - Max	kW	0,3 - 1,0	0,4 - 1,2	0,5 - 1,5			
		38 °C	Min - Max	kW	0,3 - 0,9	0,3 - 1,1	0,4 - 1,4			
		43 °C	Min - Max	kW	0,2 - 0,8	0,3 - 1,0	0,4 - 1,3			

LT	Cooling capacity at				R449A/R448A					
	ET				-35 °C	-30 °C	-25 °C			
OCU-KRE022L05	AT	32 °C	Min - Max	kW	0,6 - 1,8	0,7 - 2,2	0,9 - 2,8			
		38 °C	Min - Max	kW	0,5 - 1,6	0,7 - 2,0	0,8 - 2,5			
		43 °C	Min - Max	kW	0,5 - 1,5	0,6 - 1,9	0,8 - 2,3			

LT	Cooling capacity at				R449A/R448A					
	ET				-35 °C	-30 °C	-25 °C			
OCU-KRE030L05	AT	32 °C	Min - Max	kW	0,8 - 2,4	1,0 - 2,9	1,3 - 3,6			
		38 °C	Min - Max	kW	0,7 - 2,2	0,9 - 2,7	1,2 - 3,3			
		43 °C	Min - Max	kW	0,7 - 2,0	0,9 - 2,4	1,1 - 3,0			

iCOOL OCU/SCU Series - HFC/HFO condensing units



The possibility to address a larger audience, covering the Condensing Units (CDUs) market that CO₂ is not yet covering today.



MT/LT type: iCOOL OCU/SCU Series - HFC/HFO condensing units.

From 3,5 to 42,0 kW.

Recognising that HFC/HFO systems still represent the majority of demand in the European refrigeration market, the line-up is designed to support current needs while also enabling a smooth transition for those seeking more climate-friendly alternatives. The iCOOL range addresses this directly, supporting continued use of HFCs and introducing A2L-ready feature, offering customers a flexible, future-proof solution that bridges today's realities with tomorrow's requirements.



- Complete capacity range of compact CDUs for multi-evaporator applications
- Significant energy savings vs. ON / OFF
- Low noise units with special silent features: Inverter compressor, EC fan and 6-face soundproof insulation of the compressor compartment
- Customisation options – fully tested and factory mounted

iCOOL OCU Series - R448A / R449A / R134a / R513A


Specifications and capacity tables.



MODEL			OCU-KRC045M08	OCU-KRC070M08	OCU-KRC100M08	OCU-KSC120M08
Compressor			Single Inverter compressor	Single Inverter compressor	Single Inverter compressor	Single Inverter compressor
Compatible refrigerants			R448A, R449A, R134a, R513A	R448A, R449A, R134a, R513A	R448A, R449A, R134a, R513A	R448A, R449A, R134a, R513A
PED category			I	II	II	II
Application			MT	MT	MT	MT
Cooling capacity at ET -35 °C AT 32 °C		Min ~ Max	kW	—	—	—
Cooling capacity at ET -10 °C AT 32 °C		Min ~ Max	kW	0,8 - 4,7	1,2 - 7,2	2,2 - 9,4
SEPR freezing at ET -35 °C AT 32 °C			—	—	—	—
SEPR cooling at ET -10 °C AT 32 °C			3,28	3,60	4,29	3,48
Annual electricity consumption at ET -35 °C AT 32 °C			kWh/a	—	—	—
Annual electricity consumption at ET -10 °C AT 32 °C			kWh/a	9070	12324	13347
Nominal operating current at ET -10 °C MT / -30 °C LT AT 32 °C and 230 - 400 V 50 Hz			A	5,0	6,9	7,2
Maximum operating current (in the most loaded phase at 230 - 400 V 50 Hz)			A	7,2	10,1	9,8
Maximum power consumption			kW	3,7	5,6	5,4
Dimensions WxHxD			mm	1106 x 559 x 461	1140 x 758 x 439	1280 x 963 x 439
Weight			kg	94	110	140
Sound level at 10 m			dB(A)	39,0	40,0	41,0
Condenser	Fans x diameter		mm	1x450	1x630	1x630
	Air flow		m³/h	3850	6150	6150
	Fan static pressure ¹⁾		Pa	120	160	160
	Fan power supply		V / ph / Hz	200 - 277 / 1 / 50	200 - 277 / 1 / 50	200 - 277 / 1 / 50
	Fan power consumption		W	170	220	220
	Nominal fan current		A	1,4	1,2	1,2
Compressor	Model			C-7RVN113L0A	C-7RZ320L4ABL	C-8RZ420L4AAL
	Volumetric flow		m³/h	1,25 - 7,5	1,7 - 10,4	3,0 - 13,6
	Rotation range		rps	15 - 90	15 - 90	20 - 90
	Current	Full load amperage	A	5,8	8,7	8,8
		Peak current limit / Locked rotor amperage	A	17,8 / —	19,2 / —	31,9 / —
	Oil type			FV68S (PVE)	FV68S (PVE)	FV68S (PVE)
	Crankcase heater power consumption		W	35	40	35
Oil charge			dm³	0,7 + 0,4	1,35 + 0,4	2,0 + 0,4
Connections	Suction	Inch	5/8	3/4	7/8	7/8
	Liquid	Inch	3/8	3/8	1/2	1/2
Liquid receiver			dm³	3,9	7,1	10,0
CU power supply	Voltage		V / Hz	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)
	Recommended minimum cable cross-section		mm²	5x2,5	5x2,5	5x2,5
	Recommended minimum protection			C16	C16	C20
Maximum recommended pipe distance			m	40	40	40
Maximum height distance	Evaporator above	m	12	12	12	12
	Evaporator below	m	12	12	12	12
Which pipes needs to be insulated		Suction / liquid / both	Suction	Suction	Suction	Suction
Recommended insulation thickness			mm	13	13	13
Maximum quantity of evaporators connected			Qty.	5	5	7
Evaporation temperature			Min ~ Max	°C	-15 ~ 5	-15 ~ 5
Ambient temperature			Min ~ Max	°C	-15 ~ 10	-15 ~ 10


1) Pressure in the unit with "P" high-pressure fan customisation option.

CHECK PAGE 57 FOR A SELECTION OF ACCESSORIES



iCOOL OCU Series - R448A / R449A / R134a / R513A

Specifications and capacity tables.



MODEL			OCU-KSC150M08	OCU-KSC160M08	OCU-KSC190M08
Compressor			Single Inverter compressor	Tandem compressor Inverter + ON / OFF	Tandem compressor Inverter + ON / OFF
Compatible refrigerants			R448A, R449A, R134a, R513A	R448A, R449A, R134a, R513A	R448A, R449A, R134a, R513A
PED category			II	II	II
Application			MT	MT	MT
Cooling capacity at ET -35 °C AT 32 °C	Min – Max	kW	—	—	—
Cooling capacity at ET -10 °C AT 32 °C	Min – Max	kW	4,2 - 14,7	2,9 - 16,3	2,9 - 18,7
SEPR freezing at ET -35 °C AT 32 °C			—	—	—
SEPR cooling at ET -10 °C AT 32 °C			3,87	3,61	3,39
Annual electricity consumption at ET -35 °C AT 32 °C		kWh/a	—	—	—
Annual electricity consumption at ET -10 °C AT 32 °C		kWh/a	23139	27903	33985
Nominal operating current at ET -10 °C MT / -30 °C LT AT 32 °C and 230 - 400 V 50 Hz		A	15,2	21,3	26,3
Maximum operating current (in the most loaded phase at 230 - 400 V 50 Hz)		A	22,6	27,9	32,3
Maximum power consumption		kW	10,1	14	17,1
Dimensions	W x H x D	mm	1322 x 1493 x 475	1521 x 1493 x 475	1521 x 1493 x 475
Weight		kg	231	283	285
Sound level at 10 m		dB(A)	44,0	44,0	44,0
Condenser	Fans x diameter	mm	2x630	2x630	2x630
	Air flow	m³/h	11150	11150	11150
	Fan static pressure ¹⁾	Pa	160	N/A	N/A
	Fan power supply	V / ph / Hz	200 - 277 / 1 / 50	200 - 277 / 1 / 50	200 - 277 / 1 / 50
	Fan power consumption	W	2x230	2x230	2x230
	Nominal fan current	A	2x1	2x1	2x1
Compressor	Model		C-SBVN373L0B	C-SBS180H00B/ C-SBN303H8G	C-SBS180H00B/ C-SBN453H8G
	Volumetric flow	m³/h	9,2 - 24,6	5,8 - 17,4 / 11,6	5,8 - 17,4 / 14,7
	Rotation range	rps	30 - 80	32 - 90	32 - 90
	Current	Full load amperage	A	16,9	14,7 / 8,0
		Peak current limit / Locked rotor amperage	A	46 / —	34 / 48
	Oil type		FV68S (PVE)	FV68S (PVE)	FV68S (PVE)
Crankcase heater power consumption		W	90	2x70	2x70
Oil charge		dm³	2,0 + 0,6	2,0 + 1,7 + 2x0,4	2,0 + 1,7 + 2x0,4
Connections	Suction	Inch	1 1/8	1 1/8	1 1/8
	Liquid	Inch	5/8	5/8	5/8
Liquid receiver		dm³	15	15	15
CU power supply	Voltage	V / Hz	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)
	Recommended minimum cable cross-section	mm²	5x6,0	5x6,0	5x10,0
	Recommended minimum protection		C32	C32	C40
Maximum recommended pipe distance		m	50	50	50
Maximum height distance	Evaporator above	m	12	12	12
	Evaporator below	m	12	12	12
Which pipes needs to be insulated		Suction / liquid / both	Suction	Suction	Suction
Recommended insulation thickness		mm	13	13	13
Maximum quantity of evaporators connected		Qty.	7	10	10
Evaporation temperature		°C	-15 ~ 10	-15 ~ 10	-15 ~ 10
Ambient temperature		°C	-20 ~ 43	-20 ~ 43	-20 ~ 43


1) Pressure in the unit with "P" high-pressure fan customisation option.

**CHECK PAGE 57 FOR A SELECTION OF ACCESSORIES**



MODEL			OCU-KSC240M08	OCU-KSC280M08	OCU-KSC400M08	OCU-KSC420M08	
Compressor			Tandem compressor Inverter + ON / OFF	Tandem compressor Inverter + ON / OFF	Tandem compressor Inverter + ON / OFF	Tandem compressor Inverter + ON / OFF	
Compatible refrigerants			R448A, R449A, R134a, R513A	R448A, R449A, R134a, R513A	R448A, R449A, R134a, R513A	R448A, R449A, R134a, R513A	
PED category			II	II	II	II	
Application			MT	MT	MT	MT	
Cooling capacity at ET -35 °C AT 32 °C		Min – Max	kW	—	—	—	
Cooling capacity at ET -10 °C AT 32 °C		Min – Max	kW	4,3 - 24,2	4,3 - 27,5	6,5 - 39,7	
SEPR freezing at ET -35 °C AT 32 °C			—	—	—	—	
SEPR cooling at ET -10 °C AT 32 °C			4,31	4,27	3,61	3,52	
Annual electricity consumption at ET -35 °C AT 32 °C		kWh/a	—	—	—	—	
Annual electricity consumption at ET -10 °C AT 32 °C		kWh/a	34316	39329	67049	73046	
Nominal operating current at ET -10 °C MT / -30 °C LT AT 32 °C and 230 - 400 V 50 Hz		A	25,9	30,5	40,0	43,9	
Maximum operating current (in the most loaded phase at 230 - 400 V 50 Hz)		A	34,8	40,4	53,8	57,3	
Maximum power consumption		kW	17,4	20,9	28,5	31,4	
Dimensions	W x H x D	mm	1528 x 1488 x 879	1528 x 1488 x 879	1670 x 1695 x 1090	1670 x 1695 x 1090	
Weight		kg	397	426	520	520	
Sound level at 10 m		dB(A)	44,0	44,0	43,0	43,0	
Condenser	Fans x diameter	mm	2x630	2x630	1x800	1x800	
	Air flow	m³/h	12600	12600	21000	21000	
	Fan static pressure	Pa	N/A	N/A	160	160	
	Fan power supply	V / ph / Hz	200 - 240 / 1 / 50	200 - 277 / 1 / 50	380 - 400 / 3 / 50	380 - 400 / 3 / 50	
	Fan power consumption	W	2x230	2x230	1950	1950	
	Nominal fan current	A	2x1	2x1	2,8	2,8	
Compressor	Model		C-SBVN373L0B/ C-SBN453H8G	C-SBVN373L0B/ C-SCN603H8T	4CC149NA04/ C-SCN753H8T	4CC149NA04/ C-SCN903H8T	
	Volumetric flow	m³/h	7,7 - 24,6 / 14,7	7,7 - 24,6 / 23,6	10,7 - 39,3 / 30,3	10,7 - 39,3 / 36,2	
	Rotation range	rps	31 - 80	31 - 80	21 - 75	21 - 75	
	Current	Full load amperage	A	17,2 / 11,9	18,4 / 16,0	26,0 / 19,4	25,8 / 23,2
		Peak current limit / Locked rotor amperage	A	46 / 66	46 / 80	52 / 96	52 / 96
	Oil type		FV68S (PVE)	FV68S (PVE)	FV68S (PVE)	FV68S (PVE)	
Crankcase heater power consumption		W	40	2x90	2x90	2x90	
Oil charge		dm³	2,0 + 1,7 + 2x0,6	2,0 + 2,8 + 2x0,6	2x2,8 + 2,0	2x2,8 + 2,0	
Connections	Suction	Inch	1 3/8	1 3/8	1 5/8	1 5/8	
	Liquid	Inch	7/8	7/8	7/8	7/8	
Liquid receiver		dm³	15	15	30	30	
CU power supply	Voltage	V / Hz	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	
	Recommended minimum cable cross-section	mm²	5x10,0	5x10,0	5x16,0	5x16,0	
	Recommended minimum protection		C40	C50	C63	C63	
Maximum recommended pipe distance		m	70	70	70	70	
Maximum height distance	Evaporator above	m	12	12	12	12	
	Evaporator below	m	12	12	12	12	
Which pipes needs to be insulated		Suction / liquid / both	Suction	Suction	Suction	Suction	
Recommended insulation thickness		mm	13	13	13	13	
Maximum quantity of evaporators connected		Qty.	10	10	20	20	
Evaporation temperature		Min – Max	°C	-15 ~ 10	-15 ~ 10	-15 ~ 10	
Ambient temperature		Min – Max	°C	-20 ~ 43	-20 ~ 43	-20 ~ 43	

 CHECK PAGE 57 FOR A SELECTION OF ACCESSORIES




iCOOL OCU Series - R448A / R449A

Specifications and capacity tables.



MODEL			OCU-KRC035L08	OCU-KRC050L08	OCU-KSC090L08	OCU-KSC140L08
Compressor			Single Inverter compressor	Single Inverter compressor	Single Inverter compressor	Tandem compressor Inverter + ON / OFF
Compatible refrigerants			R448A, R449A	R448A, R449A	R448A, R449A	R448A, R449A
PED category			I	II	II	II
Application			LT	LT	LT	LT
Cooling capacity at ET -35 °C AT 32 °C	Min - Max	kW	0,4 - 2,8	1,2 - 4,4	1,7 - 6,8	1,7 - 11,6
Cooling capacity at ET -10 °C AT 32 °C	Min - Max	kW	—	—	—	—
SEPR freezing at ET -35 °C AT 32 °C			1,76	1,83	1,65	—
SEPR cooling at ET -10 °C AT 32 °C			—	—	—	—
Annual electricity consumption at ET -35 °C AT 32 °C		kWh/a	10630	18315	33998	—
Annual electricity consumption at ET -10 °C AT 32 °C		kWh/a	—	—	—	—
Nominal operating current at ET -10 °C MT / -30 °C LT AT 32 °C and 230 - 400 V 50 Hz		A	5,9	10,1	20,7	32,9
Maximum operating current (in the most loaded phase at 230 - 400 V 50 Hz)		A	7,9	12,8	29,9	43
Maximum power consumption		kW	4,1	7,2	13,6	21
Dimensions	W x H x D	mm	1105 x 559 x 466	1289 x 758 x 439	1322 x 1493 x 475	1528 x 1488 x 879
Weight		kg	96	132	286	460
Sound level at 10 m		dB(A)	39,0	44,0	44,0	44,0
Condenser	Fans x diameter	mm	1x450	1x630	2x630	2x630
	Air flow	m³/h	3850	6150	11150	12600
	Fan static pressure ¹⁾	Pa	120	160	N/A	N/A
	Fan power supply	V / ph / Hz	200 - 277 / 1 / 50	200 - 277 / 1 / 50	200 - 277 / 1 / 50	200 - 277 / 1 / 50
	Fan power consumption	W	170	220	2x230	2x230
	Nominal fan current	A	1,4	1,2	2x1	2x1
Compressor	Model		C-7RZ320L4ABL	C-9RZ580L4AAL	ACC144NA03	ACC144NA03 / C-SCN603L8H
	Volumetric flow	m³/h	1,7 - 10,4	5,2 - 18,7	10,0 - 37,6	10 - 37,6 / 23,8
	Rotation range	rps	15 - 90	25 - 90	25 - 72	25 - 72
	Current	A	6,4	10	22,9	21,6 / 14,8
	Peak current limit / Locked rotor amperage	A	19,2 / —	28,4 / —	46 / —	46 / 90
	Oil type		FV68S (PVE)	FV68S (PVE)	FV32S (PVE)	FV32S (PVE)
Crankcase heater power consumption		W	35	35	90	2x90
Oil charge		dm³	0,7 + 0,4	2,1 + 0,4	2,5 + 0,4	2x2,5 + 2x0,6
Connections	Suction	Inch	7/8	7/8	1 1/8	1 3/8
	Liquid	Inch	3/8	3/8	5/8	7/8
Liquid receiver		dm³	3,9	7,1	15	15
CU power supply	Voltage	V / Hz	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)
	Recommended minimum cable cross-section	mm²	5x2,5	5x2,5	5x6,0	5x10,0
	Recommended minimum protection		C16	C20	C32	C50
Maximum recommended pipe distance		m	40	40	40	50
Maximum height distance	Evaporator above	m	12	12	12	12
	Evaporator below	m	12	12	12	12
Which pipes needs to be insulated	Suction / liquid / both		Suction	Suction	Suction	Suction
Recommended insulation thickness		mm	19	19	19	19
Maximum quantity of evaporators connected		Qty.	5	5	5	7
Evaporation temperature		°C	-35 ~ -15	-35 ~ -15	-35 ~ -10	-35 ~ -10
Ambient temperature		°C	-20 ~ 43	-20 ~ 43	-20 ~ 43	-20 ~ 43

1) Pressure in the unit with "P" high-pressure fan customisation option.



iCOOL SCU Series • R448A / R449A / R134a / R513A


Specifications and capacity tables.



MODEL			SCU-KSC160M08	SCU-KSC190M08	SCU-KSC090L08
Compressor			Tandem compressor Inverter + ON / OFF	Tandem compressor Inverter + ON / OFF	Single Inverter compressor
Compatible refrigerants			R448A, R449A, R134a, R513A	R448A, R449A, R134a, R513A	R448A, R449A
PED category			II	II	II
Application			MT	MT	LT
Cooling capacity at ET -35 °C AT 32 °C	Min ~ Max	kW	—	—	1,7 - 6,8
Cooling capacity at ET -10 °C AT 32 °C	Min ~ Max	kW	2,9 - 16,3	2,9 - 18,7	—
SEPR freezing at ET -35 °C AT 32 °C			—	—	—
SEPR cooling at ET -10 °C AT 32 °C			3,14	3,19	—
Annual electricity consumption at ET -35 °C AT 32 °C		kWh/a	—	—	—
Annual electricity consumption at ET -10 °C AT 32 °C		kWh/a	31411	35312	—
Nominal operating current at ET -10 °C MT / -30 °C LT AT 32 °C and 230 - 400 V 50 Hz		A	23,6	28,7	23,0
Maximum operating current (in the most loaded phase at 230 - 400 V 50 Hz)		A	30,5	34,9	32,5
Maximum power consumption		kW	14,6	17,7	14,1
Dimensions	W x H x D	mm	1327 x 1558 x 745	1327 x 1558 x 745	1327 x 1558 x 745
Weight		kg	342	344	325
Sound level at 10 m		dB(A)	55,0	55,0	55,0
Condenser	Fans x diameter	mm	1x560	1x560	1x560
	Air flow	m³/h	9000	9000	9000
	Fan static pressure	Pa	120	80	120
	Fan power supply	V / ph / Hz	200 - 277 / 1/50	200 - 277 / 1/50	200 - 277 / 1/50
	Fan power consumption	W	1050	1050	1050
	Nominal fan current	A	4,6	4,6	4,6
Compressor	Model		C-SBS180H00B/ C-SBN303H8G	C-SBS180H00B/ C-SBN453H8G	ACC144NA03
	Volumetric flow	m³/h	5,8 - 17,4 / 11,6	5,8 - 17,4 / 14,7	10,0 - 37,6
	Rotation range	rps	32 - 90	32 - 90	25 - 72
	Current	Full load amperage	A	14,7 / 8,0	22,9
		Peak current limit / Locked rotor amperage	A	34 / 48	46 / —
	Oil type		FV68S (PVE)	FV68S (PVE)	FV32S (PVE)
Crankcase heater power consumption		W	2x70	2x70	90
Oil charge		dm³	2,0 + 1,7 + 2x0,4	2,0 + 1,7 + 2x0,4	2,5 + 0,4
Connections	Suction	Inch	1 1/8	1 1/8	1 1/8
	Liquid	Inch	5/8	5/8	5/8
Liquid receiver		dm³	15	15	15
CU power supply	Voltage	V / Hz	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)
	Recommended minimum cable cross-section	mm²	5x6,0	5x10,0	5x10,0
	Recommended minimum protection		C32	C40	C40
Maximum recommended pipe distance		m	50	50	40
Maximum height distance	Evaporator above	m	12	12	12
	Evaporator below	m	12	12	12
Which pipes needs to be insulated		Suction / liquid / both	Suction	Suction	Suction
Recommended insulation thickness		mm	13	13	19
Maximum quantity of evaporators connected		Qty.	10	10	5
Evaporation temperature		Min ~ Max °C	-15 ~ -10	-15 ~ -10	-35 ~ -10
Ambient temperature		Min ~ Max °C	-20 ~ 43	-20 ~ 43	-20 ~ 43



CHECK PAGE 57 FOR A SELECTION OF ACCESSORIES



iCOOL OCU/SCU Series · R448A / R449A / R134a / R513A

Specifications and capacity tables.

MT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
OCU-KRC045M08	AT	32 °C	Min - Max	kW	0,6 - 3,9	0,8 - 4,7	0,9 - 5,7	— — —	0,5 - 3,4	0,6 - 4,0
		38 °C	Min - Max	kW	0,6 - 3,8	0,8 - 4,6	0,9 - 5,6	— — —	0,5 - 3,2	0,5 - 3,7
		43 °C	Min - Max	kW	0,6 - 3,8	0,7 - 4,6	0,9 - 5,6	— — —	0,4 - 2,9	0,5 - 3,4

MT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
OCU-KRC070M08	AT	32 °C	Min - Max	kW	1,0 - 6,1	1,2 - 7,2	1,4 - 8,4	— — —	0,8 - 4,1	1,0 - 4,9
		38 °C	Min - Max	kW	0,9 - 6,0	1,2 - 7,1	1,4 - 8,3	— — —	0,8 - 3,8	0,9 - 4,5
		43 °C	Min - Max	kW	0,9 - 6,0	1,1 - 7,1	1,4 - 8,3	— — —	0,7 - 3,5	0,9 - 4,2

MT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
OCU-KRC100M08	AT	32 °C	Min - Max	kW	1,8 - 7,9	2,2 - 9,4	2,6 - 11,1	1,1 - 4,8	1,3 - 5,8	1,6 - 7,0
		38 °C	Min - Max	kW	1,7 - 7,2	2,0 - 8,7	2,4 - 10,2	1,0 - 4,4	1,2 - 5,4	1,5 - 6,6
		43 °C	Min - Max	kW	1,5 - 6,7	1,9 - 8,0	2,3 - 9,5	0,9 - 4,1	1,1 - 5,1	1,4 - 6,1

MT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
OCU-KSC120M08	AT	32 °C	Min - Max	kW	2,4 - 9,8	3,0 - 11,9	3,7 - 14,3	1,6 - 5,5	2,1 - 6,8	2,6 - 8,3
		38 °C	Min - Max	kW	2,1 - 9,0	2,7 - 10,8	3,4 - 13,1	1,5 - 5,1	1,9 - 6,3	2,4 - 7,8
		43 °C	Min - Max	kW	2,0 - 8,5	2,5 - 10,3	3,1 - 12,5	1,4 - 4,8	1,8 - 6,0	2,2 - 7,3

MT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
OCU-KSC150M08	AT	32 °C	Min - Max	kW	3,4 - 12,1	4,2 - 14,7	5,2 - 17,6	2,1 - 8,4	2,5 - 10,0	3,0 - 12,0
		38 °C	Min - Max	kW	3,1 - 10,8	3,8 - 13,0	4,7 - 15,6	1,9 - 7,6	2,3 - 9,1	2,8 - 11,0
		43 °C	Min - Max	kW	2,8 - 9,7	3,5 - 11,8	4,3 - 14,2	1,7 - 7,0	2,1 - 8,5	2,6 - 10,2

MT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
OCU-KSC160M08	AT	32 °C	Min - Max	kW	2,3 - 13,2	2,9 - 16,3	3,6 - 19,8	1,7 - 9,0	2,2 - 10,9	2,8 - 13,2
		38 °C	Min - Max	kW	2,0 - 11,8	2,6 - 14,6	3,2 - 17,9	1,6 - 8,3	2,0 - 10,1	2,6 - 12,3
		43 °C	Min - Max	kW	1,9 - 10,7	2,4 - 13,3	3,0 - 16,4	1,5 - 7,8	1,9 - 9,5	2,4 - 11,5

MT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
OCU-KSC190M08	AT	32 °C	Min - Max	kW	2,3 - 15,2	2,9 - 18,7	3,6 - 22,7	1,7 - 10,7	2,2 - 13,1	2,8 - 15,6
		38 °C	Min - Max	kW	2,1 - 13,5	2,6 - 16,7	3,2 - 20,5	— — —	2,0 - 11,9	2,6 - 14,6
		43 °C	Min - Max	kW	— — —	2,4 - 15,2	3,0 - 18,8	— — —	1,9 - 11,5	2,4 - 14,5

MT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
OCU-KSC240M08	AT	32 °C	Min - Max	kW	3,4 - 19,8	4,3 - 24,2	5,3 - 29,3	2,7 - 14,4	3,2 - 17,2	3,9 - 20,5
		38 °C	Min - Max	kW	3,1 - 17,5	3,9 - 21,5	4,8 - 26,2	2,4 - 13,0	3,0 - 15,7	3,6 - 18,8
		43 °C	Min - Max	kW	2,9 - 15,7	3,5 - 19,5	4,4 - 23,8	2,2 - 12,0	2,7 - 14,5	3,3 - 17,5

MT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
OCU-KSC280M08	AT	32 °C	Min - Max	kW	3,3 - 17,5	4,3 - 27,5	5,3 - 32,8	2,7 - 16,4	3,2 - 19,5	3,9 - 23,3
		38 °C	Min - Max	kW	3,1 - 20,6	3,9 - 24,7	4,8 - 29,5	2,4 - 14,9	3,1 - 17,8	3,6 - 21,4
		43 °C	Min - Max	kW	— — —	3,5 - 22,6	4,4 - 27,0	— — —	2,7 - 16,5	3,3 - 20,0

MT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
OCU-KSC400M08	AT	32 °C	Min - Max	kW	5,0 - 32,9	6,5 - 39,7	8,4 - 48,0	2,8 - 19,6	3,5 - 23,9	4,3 - 29,0
		38 °C	Min - Max	kW	4,8 - 30,1	5,9 - 36,3	7,5 - 43,7	2,5 - 18,0	3,1 - 22,0	3,9 - 26,6
		43 °C	Min - Max	kW	4,4 - 28,0	5,4 - 33,6	6,7 - 40,4	2,2 - 16,8	2,8 - 20,4	3,5 - 24,7

MT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
OCU-KSC420M08	AT	32 °C	Min - Max	kW	5,0 - 35,0	6,5 - 42,2	8,4 - 50,7	2,8 - 20,7	3,5 - 25,3	4,3 - 30,7
		38 °C	Min - Max	kW	4,8 - 32,0	5,9 - 38,5	7,5 - 46,3	2,5 - 19,1	3,1 - 23,2	3,9 - 28,2
		43 °C	Min - Max	kW	4,4 - 30,0	5,4 - 35,7	6,7 - 42,8	2,2 - 17,8	2,8 - 21,6	3,5 - 26,2

LT	Cooling capacity at				R449A/R448A		
	ET				-35 °C	-30 °C	-25 °C
OCU-KRC035L08	AT	32 °C	Min - Max	kW	0,4 - 2,8	0,5 - 3,5	0,7 - 4,2
		38 °C	Min - Max	kW	0,4 - 2,8	0,5 - 3,4	0,6 - 4,1
		43 °C	Min - Max	kW	0,4 - 2,7	0,5 - 3,3	0,6 - 4,0

LT	Cooling capacity at				R449A/R448A		
	ET				-35 °C	-30 °C	-25 °C
OCU-KRC050L08	AT	32 °C	Min - Max	kW	1,2 - 4,4	1,5 - 5,4	1,9 - 6,6
		38 °C	Min - Max	kW	1,1 - 4,0	1,4 - 4,9	1,7 - 6,0
		43 °C	Min - Max	kW	1,0 - 3,6	1,3 - 4,5	1,6 - 5,4

LT	Cooling capacity at				R449A/R448A		
	ET				-35 °C	-30 °C	-25 °C
OCU-KSC090L08	AT	32 °C	Min - Max	kW	1,7 - 6,8	2,2 - 8,5	2,8 - 10,6
		38 °C	Min - Max	kW	1,4 - 6,3	1,9 - 7,9	2,5 - 10,0
		43 °C	Min - Max	kW	1,2 - 5,9	1,6 - 7,4	2,2 - 9,3

LT	Cooling capacity at				R449A/R448A		
	ET				-35 °C	-30 °C	-25 °C
OCU-KSC140L08	AT	32 °C	Min - Max	kW	1,7 - 11,6	2,2 - 14,2	2,8 - 17,5
		38 °C	Min - Max	kW	1,4 - 10,5	1,9 - 13,0	2,5 - 16,1
		43 °C	Min - Max	kW	1,2 - 9,7	1,6 - 12,1	2,2 - 15,0

MT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
SCU-KSC160M08	AT	32 °C	Min - Max	kW	2,3 - 13,2	2,9 - 16,3	3,6 - 19,8	1,7 - 8,9	2,2 - 10,8	2,8 - 13,1
		38 °C	Min - Max	kW	2,1 - 11,8	2,6 - 14,6	3,2 - 17,9	1,6 - 8,2	2,0 - 10,0	2,6 - 12,2
		43 °C	Min - Max	kW	1,9 - 10,7	2,4 - 13,3	3,0 - 16,4	— — —	1,9 - 9,4	2,4 - 11,4


MT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
SCU-KSC190M08	AT	32 °C	Min - Max	kW	2,3 - 15,2	2,9 - 18,7	3,6 - 22,7	1,7 - 10,7	2,2 - 13,1	2,8 - 15,6
		38 °C	Min - Max	kW	2,1 - 13,5	2,6 - 16,7	3,2 - 20,5	— — —	2,0 - 11,9	2,6 - 14,6
		43 °C	Min - Max	kW	— — —	2,4 - 15,2	3,0 - 18,8	— — —	1,9 - 11,5	2,4 - 14,5

LT	Cooling capacity at				R449A/R448A		
	ET				-35 °C	-30 °C	-25 °C
SCU-KSC090L08	AT	32 °C	Min - Max	kW	1,7 - 6,8	2,2 - 8,5	2,8 - 10,6
		38 °C	Min - Max	kW	1,4 - 6,3	1,9 - 7,9	2,5 - 9,9
		43 °C	Min - Max	kW	1,2 - 5,9	1,6 - 7,4	2,2 - 9,3

REF PRO DESIGNER.

Think beyond unit selection.

An advanced design tool that supports engineers, installers, and technicians in designing advanced systems for commercial refrigeration installations:
<http://www.panasonicproclub.com>

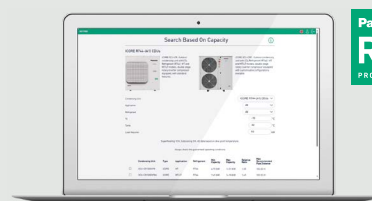

iCOOL LCU/WCU Series - HFC/HFO compressor base/condensing units

INVERTER

The variation of iCOOL to meet demanding installation environment requirements.



iCOOL LCU Series MT/LT type.

Remote compressor base.

MT: From 5,1 to 38,0 kW.

LT: From 2,0 to 8,7 kW.

**iCOOL WCU Series MT/LT type.**

Water/glycol cooled condensing units.

MT: From 5,1 to 38,0 kW.

LT: From 2,0 to 8,7 kW.



A customisation option with a soundproof insulated housing is available for both the LCU and WCU Series.



NOISE REDUCTION (INDOOR INSTALLATION)




NO SPACE POLLUTION (CITY-CENTRES FOCUS)



AVAILABLE WITH WATER COOLED CONDENSER OPTION, FOR SHORTER INSTALLATIONS AND HEAT RECLAIM BENEFITS

Example installation type:

Inverter units dedicated for indoor mounting.

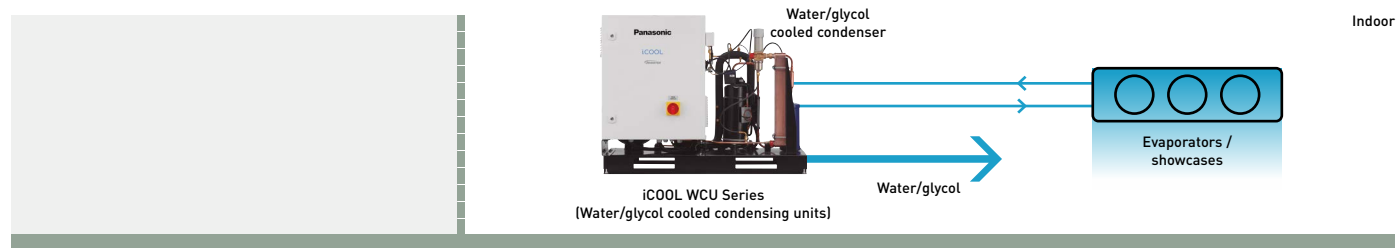**or**

High performance Inverter compressor base or compressor set for large, medium, and small commercial installations. Designed for mid-high or low temperature applications. Equipped with hermetic scroll or rotary compressor. Perfect for low noise and city center applications.

iCOOL LCU Series (remote compressor base) - R448A / R449A / R134a / R513A

Specifications and capacity tables.



MODEL			LCU-KRC045M08	LCU-KRC070M08	LCU-KSC100M08	LCU-KSC160M08	LCU-KSC190M08
Compressor			Single compressor	Single compressor	Single compressor	Tandem compressor Inverter + ON / OFF	Tandem compressor Inverter + ON / OFF
Compatible refrigerants			R448A, R449A, R134a, R513A	R448A, R449A, R134a, R513A	R448A, R449A, R134a, R513A	R448A, R449A, R134a, R513A	R448A, R449A, R134a, R513A
PED category			I	II	II	II	II
Application			MT	MT	MT	MT	MT
Cooling capacity at ET -35 °C CT 45 °C	Min - Max	kW	—	—	—	—	—
Cooling capacity at ET -10 °C CT 45 °C	Min - Max	kW	0,7 - 5,1	1,0 - 7,2	2,3 - 10,0	2,3 - 16,3	2,3 - 19,6
Nominal operating current at ET -10 °C MT / -30 °C LT AT 32 °C and 400 V 50 Hz		A	4,9	7,5	12,1	19,5	24,5
Maximum operating current (in the most loaded phase at 400 V 50 Hz)		A	7,5	11,4	17,9	25,9	30,3
Maximum power consumption		kW	3,5	5,4	8,4	13,6	16,7
Dimensions	W x H x D	mm	1000 x 705 x 530	1000 x 772 x 507	1200 x 775 x 561	1300 x 874 x 662	1300 x 874 x 662
Weight		kg	85	89	124	209	211
Sound level at 10 m		dB(A)	39,0	42,0	54,0	54,0	54,0
Sound level at 10 m with housing "H" customisation option		dB(A)	36,0	39,0	51,0	51,0	51,0
Compressor	Model		C-7RVN113L0A	C-7RZ320L4ABL	C-SBS180H00B	C-SBS180H00B/ C-SBN303H8G	C-SBS180H00B/ C-SBN453H8G
	Volumetric flow	m³/h	1,25 - 7,5	1,7 - 10,4	5,8 - 17,4	5,8 - 17,4 / 11,6	5,8 - 17,4 / 14,7
	Rotation range	rps	15-90	15-90	32-90	32-90	32-90
	Full load amperage	A	5,8	8,7	14,7	14,7 / 8,0	15,2 / 11,9
	Current	Peak current limit/Locked rotor amperage	A	11,2 / —	15 / —	34 / —	34 / 48
	Oil type		FV68S (PVE)	FV68S (PVE)	FV68S (PVE)	FV68S (PVE)	FV68S (PVE)
	Crankcase heater power consumption	W	35	40	70	2x70	2x70
Oil charge		dm³	0,7 + 0,4	0,7 + 0,4	2,0 + 0,4	2,0 + 1,7 + 2x0,4	2,0 + 1,7 + 2x0,4
Connections	Suction	Inch	5/8	3/4	7/8	1 1/8	1 1/8
	Liquid	Inch	3/8	3/8	1/2	5/8	5/8
Liquid receiver		dm³	3,9	7,1	10,0	14	14
CU power supply	Voltage	V / Hz	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)
	Recommended minimum cable cross-section	mm²	5x2,5	5x2,5	5x4,0	5x6,0	5x10,0
	Recommended minimum protection		C16	C16	C25	C32	C40
Maximum recommended pipe distance		m	40	40	40	50	50
Maximum height distance	Evaporator above	m	12	12	12	12	12
	Evaporator below	m	12	12	12	12	12
Which pipes needs to be insulated	Suction / liquid / both		Suction	Suction	Suction	Suction	Suction
Recommended insulation thickness		mm	13	13	13	13	13
Maximum quantity of evaporators connected		Qty.	5	5	7	10	10
Evaporation temperature	Min - Max	°C	-15 ~ 5	-15 ~ 5	-15 ~ 10	-15 ~ 10	-15 ~ 10
Ambient temperature	Min - Max	°C	-20 ~ 43	-20 ~ 43	-20 ~ 43	-20 ~ 43	-20 ~ 43



CHECK PAGE 57 FOR A SELECTION OF ACCESSORIES





MODEL			LCU-KSC280M08	LCU-KSC400M08	LCU-KRC020L08	LCU-KRC035L08	LCU-KRC050L08	LCU-KSC090L08
Compressor			Tandem compressor Inverter + ON / OFF	Tandem compressor Inverter + ON / OFF	Single Inverter compressor	Single Inverter compressor	Single Inverter compressor	Single Inverter compressor
Compatible refrigerants			R448A, R449A, R134a, R513A	R448A, R449A, R134a, R513A	R448A, R449A	R448A, R449A	R448A, R449A	R448A, R449A
PED category			II	II	II	I	II	II
Application			MT	MT	LT	LT	LT	LT
Cooling capacity at ET -35 °C CT 45 °C	Min ~ Max	kW	—	—	0,2 - 1,6	0,3 - 2,4	1,0 - 4,3	1,8 - 6,9
Cooling capacity at ET -10 °C CT 45 °C	Min ~ Max	kW	4,6 - 27,7	5,4 - 38,0	—	—	—	—
Nominal operating current at ET -10 °C MT / -30 °C LT AT 32 °C and 400 V 50 Hz		A	28,7	36,9	3,9	6,1	11,7	18,9
Maximum operating current (in the most loaded phase at 400 V 50 Hz)		A	38,4	51	5,7	8,4	14,9	27,9
Maximum power consumption		kW	20,4	26,6	2,7	3,9	7,0	13,1
Dimensions	W x H x D	mm	1650 x 975 x 649	1860 x 975 x 890	1000 x 705 x 530	1000 x 705 x 530	1000 x 772 x 536	1300 x 705 x 530
Weight		kg	301	380	85	85	132	159
Sound level at 10 m		dB(A)	52,0	55,0	39,0	42,0	50,0	55,0
Sound level at 10 m with housing "H" customisation option		dB(A)	49,0	52,0	36,0	39,0	47,0	52,0
Compressor	Model		C-SBVN373L0B/ C-SCN603H8T	4CC149NA04/ C-SCN753H8T	C-7RVN113L0A	C-7RZ320L4ABL	C-9RZ580L4AAL	ACC144NA03
	Volumetric flow	m³/h	7,7 - 24,6 / 23,6	10,7 - 39,3/30,3	1,25 - 7,5	1,7 - 10,4	5,2 - 18,7	10,0 - 37,6
	Rotation range	rps	31-80	21-75	15-90	15-90	25-90	25-72
	Full load amperage	A	18,4 / 16,0	26,0 / 19,4	4,4	6,4	10	22,9
	Current							
	Peak current limit/ Locked rotor amperage	A	46/80	52/96	11,2/—	15/—	28/—	46/—
	Oil type		FV68S (PVE)	FV68S (PVE)	FV68S (PVE)	FV68S (PVE)	FV68S (PVE)	FV32S (PVE)
Crankcase heater power consumption		W	2x90	2x90	35	35	35	2x90
Oil charge		dm³	2,0+2,8+2x0,6	2x2,8+2,0	0,7+0,4	0,7+0,4	2,1+0,4	2,5+0,4
Connections	Suction	Inch	1 3/8	1 5/8	5/8	7/8	7/8	1 1/8
	Liquid	Inch	7/8	7/8	3/8	3/8	3/8	5/8
Liquid receiver		dm³	14	30	3,9	3,9	7,1	14
CU power supply	Voltage	V / Hz	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)
	Recommended minimum cable cross-section	mm²	5x10,0	5x16,0	5x2,5	5x2,5	5x4,0	5x6,0
	Recommended minimum protection		C50	C63	C16	C16	C25	C32
Maximum recommended pipe distance		m	70	70	40	40	40	40
Maximum height distance	Evaporator above	m	12	12	12	12	12	12
	Evaporator below	m	12	12	12	12	12	12
Which pipes needs to be insulated		Suction / liquid / both	Suction	Suction	Suction	Suction	Suction	Suction
Recommended insulation thickness		mm	13	13	13	19	19	19
Maximum quantity of evaporators connected		Qty.	10	20	5	5	5	5
Evaporation temperature		Min ~ Max °C	-15 ~ 10	-15 ~ 10	-35 ~ 5	-35 ~ -15	-35 ~ -15	-35 ~ -10
Ambient temperature		Min ~ Max °C	-20 ~ 43	-20 ~ 43	-20 ~ 43	-20 ~ 43	-20 ~ 43	-20 ~ 43

 CHECK PAGE 57 FOR A SELECTION OF ACCESSORIES



iCOOL WCU Series (water/glycol cooled condensing units) - R448A / R449A / R134a / R513A

Specifications and capacity tables.

MODEL			WCU-KRC045M08	WCU-KRC070M08	WCU-KSC100M08	WCU-KSC160M08	WCU-KSC190M08
Compressor			Single compressor	Single compressor	Single compressor	Tandem compressor Inverter + ON / OFF	Tandem compressor Inverter + ON / OFF
Compatible refrigerants			R448A, R449A, R134a, R513A	R448A, R449A, R134a, R513A	R448A, R449A, R134a, R513A	R448A, R449A, R134a, R513A	R448A, R449A, R134a, R513A
PED category			I	I	II	II	II
Application			MT	MT	MT	MT	MT
Cooling capacity at ET -35 °C WT 30 °C / CT 40 °C	Min - Max	kW	—	—	—	—	—
Cooling capacity at ET -10 °C WT 30 °C / CT 40 °C	Min - Max	kW	0,7 - 5,4	1,1 - 7,7	2,8 - 11,1	2,8 - 18,1	2,8 - 21,8
Nominal operating current at ET -10 °C MT / -30 °C LT AT 32 °C and 400 V 50 Hz		A	4,9	7,5	12,1	19,5	24,5
Maximum operating current (in the most loaded phase at 400 V 50 Hz)		A	7,5	11,4	17,9	25,9	30,3
Maximum power consumption		kW	3,5	5,4	8,4	13,6	16,7
Dimensions W x H x D		mm	1000 x 705 x 530	1000 x 772 x 507	1200 x 775 x 561	1300 x 874 x 662	1300 x 874 x 662
Weight		kg	90	94	134	219	221
Sound level at 10 m		dB(A)	39,0	42,0	54,0	54,0	54,0
Sound level at 10 m with housing "H" customisation option		dB(A)	36,0	39,0	51,0	51,0	51,0
Compressor	Model		C-7RVN113L0A	C-7RZ320L4ABL	C-SBS180H00B	C-SBS180H00B/ C-SBN303H8G	C-SBS180H00B/ C-SBN453H8G
	Volumetric flow	m³/h	1,25 - 7,5	1,7 - 10,4	5,8 - 17,4	5,8 - 17,4 / 11,6	5,8 - 17,4 / 14,7
	Rotation range	rps	15 - 90	15 - 90	32 - 90	32 - 90	32 - 90
	Full load amperage	A	5,8	8,7	14,7	14,7/8,0	15,2/11,9
	Current						
	Peak current limit / Locked rotor amperage	A	11,2 / —	15 / —	34 / —	34 / 48	34 / 66
	Oil type		FV68S (PVE)	FV68S (PVE)	FV68S (PVE)	FV68S (PVE)	FV68S (PVE)
Crankcase heater power consumption		W	35	40	70	2x70	2x70
Oil charge		dm³	0,7 + 0,4	0,7 + 0,4	2,0 + 0,4	2,0 + 1,7 + 2x0,4	2,0 + 1,7 + 2x0,4
Connections	Suction	Inch	5/8	3/4	7/8	1 1/8	1 1/8
	Liquid	Inch	3/8	3/8	1/2	5/8	5/8
Liquid receiver		dm³	3,9	7,1	10,0	14	14
CU power supply	Voltage	V / Hz	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)
	Recommended minimum cable cross-section	mm²	5x2,5	5x2,5	5x4,0	5x6,0	5x10,0
	Recommended minimum protection		C16	C16	C25	C32	C40
Maximum recommended pipe distance		m	40	40	40	50	50
Maximum height distance	Evaporator above	m	12	12	12	12	12
	Evaporator below	m	12	12	12	12	12
Which pipes needs to be insulated	Suction / liquid / both		Suction	Suction	Suction	Suction	Suction
Recommended insulation thickness		mm	13	13	13	13	13
Maximum quantity of evaporators connected		Qty.	5	5	7	10	10
Evaporation temperature	Min - Max	°C	-15 ~ 5	-15 ~ 5	-15 ~ 10	-15 ~ 10	-15 ~ 10
Ambient temperature	Min - Max	°C	-20 ~ 43	-20 ~ 43	-20 ~ 43	-20 ~ 43	-20 ~ 43
Plate heat exchanger connections	Inlet	Inch	1/2	1/2	1	1	1
	Outlet	Inch	3/4	3/4	1/2	1	1

 **CHECK PAGE 57 FOR A SELECTION OF ACCESSORIES**




MODEL			WCU-KSC280M08	WCU-KSC400M08	WCU-KRC020L08	WCU-KRC035L08	WCU-KRC050L08	WCU-KSC090L08	
Compressor			Tandem compressor Inverter + ON / OFF	Tandem compressor Inverter + ON / OFF	Single Inverter compressor	Single Inverter compressor	Single Inverter compressor	Single Inverter compressor	
Compatible refrigerants			R448A, R449A, R134a, R513A	R448A, R449A, R134a, R513A	R448A, R449A	R448A, R449A	R448A, R449A	R448A, R449A	
PED category			II	II	I	I	I	II	
Application			MT	MT	LT	LT	LT	LT	
Cooling capacity at ET -35 °C WT 30 °C / CT 40 °C		Min ~ Max	kW	—	—	0,2 - 1,7	0,3 - 2,6	1,1 - 4,6	2,0 - 7,3
Cooling capacity at ET -10 °C WT 30 °C / CT 40 °C		Min ~ Max	kW	5,0 - 30,5	5,9 - 41,0	—	—	—	—
Nominal operating current at ET -10 °C MT / -30 °C LT AT 32 °C and 400 V 50 Hz			A	28,7	36,9	3,9	6,1	11,7	18,9
Maximum operating current (in the most loaded phase at 400 V 50 Hz)			A	38,4	51	5,7	8,4	14,9	27,9
Maximum power consumption			kW	20,4	26,6	2,7	3,9	7,0	13,1
Dimensions	W x H x D	mm	1650x975x649	1860x975x890	1000x705x530	1000x705x530	1000x772x536	1300x705x530	
Weight		kg	316	395	92	92	139	169	
Sound level at 10 m		dB(A)	52,0	55,0	39,0	42,0	50,0	55,0	
Sound level at 10 m with housing "H" customisation option		dB(A)	49,0	52,0	36,0	39,0	47,0	52,0	
Compressor	Model		C-SBVN373L0B/ C-SCN603H8T	4CC149NA04/ C-SCN753H8T	C-7RVN113L0A	C-7RZ320L4ABL	C-9RZ580L4AAL	ACC144NA03	
	Volumetric flow	m³/h	7,7 - 24,6 / 23,6	10,7 - 39,3/30,3	1,25 - 7,5	1,7 - 10,4	5,2 - 18,7	10,0 - 37,6	
	Rotation range	rps	31 - 80	21 - 75	15 - 90	15 - 90	25 - 90	25 - 72	
	Full load amperage	A	18,4/16,0	26,0/19,4	4,4	6,4	10	22,9	
	Current	Peak current limit / Locked rotor amperage	A	46/80	52/96	11,2/—	15/—	28/—	46/—
	Oil type		FV68S (PVE)	FV68S (PVE)	FV68S (PVE)	FV68S (PVE)	FV68S (PVE)	FV32S (PVE)	
	Crankcase heater power consumption	W	2x90	2x90	35	35	35	2x90	
Oil charge		dm³	2,0+2,8+2x0,6	2x2,8+2,0	0,7+0,4	0,7+0,4	2,1+0,4	2,5+0,4	
Connections	Suction	Inch	1 3/8	1 5/8	5/8	7/8	7/8	1 1/8	
	Liquid	Inch	7/8	7/8	3/8	3/8	3/8	5/8	
Liquid receiver		dm³	14	30	3,9	3,9	7,1	14	
CU power supply	Voltage	V / Hz	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	
	Recommended minimum cable cross-section	mm²	5x10,0	5x16,0	5x2,5	5x2,5	5x4,0	5x6,0	
	Recommended minimum protection		C50	C63	C16	C16	C25	C32	
Maximum recommended pipe distance		m	70	70	40	40	40	40	
Maximum height distance	Evaporator above	m	12	12	12	12	12	12	
	Evaporator below	m	12	12	12	12	12	12	
Which pipes needs to be insulated		Suction / liquid / both	Suction	Suction	Suction	Suction	Suction	Suction	
Recommended insulation thickness		mm	13	13	13	19	19	19	
Maximum quantity of evaporators connected		Qty.	10	20	5	5	5	5	
Evaporation temperature		Min ~ Max	°C	-15 ~ 10	-15 ~ 10	-35 ~ 5	-35 ~ -15	-35 ~ -15	-35 ~ -10
Ambient temperature		Min ~ Max	°C	-20 ~ 43	-20 ~ 43	-20 ~ 43	-20 ~ 43	-20 ~ 43	-20 ~ 43
Plate heat exchanger connections	Inlet	Inch	1 1/2	1 1/2	3/4	1/2	1/2	1	
	Outlet	Inch	1	1	3/4	3/4	3/4	1	

 CHECK PAGE 57 FOR A SELECTION OF ACCESSORIES



iCOOL LCU/WCU Series - R448A / R449A / R134a / R513A

Specifications and capacity tables.

MT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
LCU-KRC045M08	CT	40 °C	Min - Max	kW	0,6 - 4,5	0,7 - 5,4	0,9 - 6,5	0,4 - 2,4	0,5 - 3,0	0,6 - 3,6
		45 °C	Min - Max	kW	0,5 - 4,2	0,7 - 5,1	0,8 - 6,1	0,4 - 2,3	0,5 - 2,8	0,5 - 3,4
		50 °C	Min - Max	kW	0,5 - 3,9	0,6 - 4,7	0,7 - 5,7	0,3 - 2,1	0,4 - 2,6	0,5 - 3,2

MT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
LCU-KRC070M08	CT	40 °C	Min - Max	kW	0,9 - 6,4	1,1 - 7,7	1,3 - 9,3	0,5 - 3,4	0,6 - 4,2	0,7 - 5,1
		45 °C	Min - Max	kW	0,8 - 5,9	1,0 - 7,2	1,2 - 8,7	0,5 - 3,2	0,6 - 3,9	0,7 - 4,8
		50 °C	Min - Max	kW	0,7 - 5,5	0,9 - 6,7	1,1 - 8,1	0,5 - 2,9	0,5 - 3,6	0,6 - 4,5

MT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
LCU-KSC100M08	CT	40 °C	Min - Max	kW	1,9 - 8,8	2,8 - 11,1	3,8 - 13,9	1,8 - 4,9	2,2 - 6,1	2,7 - 7,6
		45 °C	Min - Max	kW	1,4 - 7,7	2,3 - 10,0	3,3 - 12,7	1,6 - 4,6	2,0 - 5,8	2,5 - 7,2
		50 °C	Min - Max	kW	0,8 - 6,7	1,9 - 9,0	2,9 - 11,6	1,5 - 4,3	1,9 - 5,4	2,3 - 6,8

MT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
LCU-KSC160M08	CT	40 °C	Min - Max	kW	1,9 - 14,2	2,8 - 18,1	3,8 - 22,8	1,8 - 8,8	2,2 - 10,8	2,7 - 13,3
		45 °C	Min - Max	kW	1,4 - 12,6	2,3 - 16,3	3,3 - 20,8	1,6 - 8,2	2,0 - 10,1	2,5 - 12,5
		50 °C	Min - Max	kW	0,8 - 11,1	1,9 - 14,7	2,9 - 19,0	1,5 - 7,7	1,9 - 9,5	2,3 - 11,7

MT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
LCU-KSC190M08	CT	40 °C	Min - Max	kW	1,9 - 17,0	2,8 - 21,8	3,8 - 27,4	1,8 - 10,9	2,2 - 13,3	2,7 - 16,3
		45 °C	Min - Max	kW	1,4 - 15,1	2,3 - 19,6	3,3 - 25,0	1,6 - 10,1	2,0 - 12,4	2,5 - 15,3
		50 °C	Min - Max	kW	0,8 - 13,3	1,9 - 17,7	2,9 - 22,8	1,5 - 9,4	1,9 - 11,6	2,3 - 14,3

MT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
LCU-KSC280M08	CT	40 °C	Min - Max	kW	4,0 - 24,5	5,0 - 30,5	6,2 - 37,9	2,0 - 15,9	2,6 - 19,9	3,3 - 24,8
		45 °C	Min - Max	kW	3,7 - 22,4	4,6 - 27,7	5,7 - 34,4	1,7 - 14,6	2,3 - 18,1	2,9 - 22,5
		50 °C	Min - Max	kW	3,3 - 20,4	4,2 - 25,2	5,2 - 31,2	1,5 - 13,3	2,0 - 16,4	2,6 - 20,4

MT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
LCU-KSC400M08	CT	40 °C	Min - Max	kW	4,7 - 33,3	5,1 - 41,0	7,4 - 50,7	2,9 - 23,5	3,6 - 29,0	4,5 - 35,7
		45 °C	Min - Max	kW	4,4 - 30,9	5,4 - 38,0	6,7 - 46,8	2,7 - 21,7	3,4 - 26,7	4,2 - 32,8
		50 °C	Min - Max	kW	3,8 - 28,7	4,9 - 35,2	6,1 - 43,2	2,5 - 20,0	3,1 - 24,5	3,9 - 30,1

LT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-35 °C	-30 °C	-25 °C	-35 °C	-30 °C	-25 °C
LCU-KRC020L08	CT	40 °C	Min - Max	kW	0,2 - 1,7	0,3 - 2,2	0,4 - 2,8	0,2 - 1,7	0,3 - 2,2	0,4 - 2,8
		45 °C	Min - Max	kW	0,2 - 1,6	0,3 - 2,0	0,3 - 2,6	0,2 - 1,6	0,3 - 2,0	0,3 - 2,6
		50 °C	Min - Max	kW	— — —	0,2 - 1,8	0,3 - 2,3	— — —	0,2 - 1,8	0,3 - 2,3

LT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-35 °C	-30 °C	-25 °C	-35 °C	-30 °C	-25 °C
LCU-KRC035L08	CT	40 °C	Min - Max	kW	0,3 - 2,6	0,4 - 3,3	0,5 - 4,1	0,3 - 2,6	0,4 - 3,3	0,5 - 4,1
		45 °C	Min - Max	kW	0,3 - 2,4	0,4 - 3,0	0,5 - 3,8	0,3 - 2,4	0,4 - 3,0	0,5 - 3,8
		50 °C	Min - Max	kW	— — —	0,3 - 2,8	0,4 - 3,5	— — —	0,3 - 2,8	0,4 - 3,5

LT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-35 °C	-30 °C	-25 °C	-35 °C	-30 °C	-25 °C
LCU-KRC050L08	CT	40 °C	Min - Max	kW	1,1 - 4,6	1,4 - 5,8	1,7 - 7,3	1,1 - 4,6	1,4 - 5,8	1,7 - 7,3
		45 °C	Min - Max	kW	1,0 - 4,3	1,3 - 5,4	1,6 - 6,8	1,0 - 4,3	1,3 - 5,4	1,6 - 6,8
		50 °C	Min - Max	kW	— — —	1,2 - 5,0	1,5 - 6,3	— — —	1,2 - 5,0	1,5 - 6,3

LT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-35 °C	-30 °C	-25 °C	-35 °C	-30 °C	-25 °C
LCU-KSC090L08	CT	40 °C	Min - Max	kW	2,0 - 7,3	2,6 - 9,1	3,3 - 11,4	2,0 - 7,3	2,6 - 9,1	3,3 - 11,4
		45 °C	Min - Max	kW	1,8 - 6,9	2,3 - 8,7	3,0 - 10,9	1,8 - 6,9	2,3 - 8,7	3,0 - 10,9
		50 °C	Min - Max	kW	— — —	2,0 - 8,3	2,6 - 10,3	— — —	2,0 - 8,3	2,6 - 10,3

*ET: Evaporation Temperature. CT: Condensing Temperature.

MT	Cooling capacity at						R449A/R448A			R134a/R513A		
	ET						-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
WCU-KRC045M08	WT	15 °C	CT	30 °C	Min - Max	kW	0,7 - 5,2	0,9 - 6,3	1,0 - 7,4	0,4 - 2,6	0,5 - 3,2	0,6 - 4,0
		30 °C		40 °C	Min - Max	kW	0,6 - 4,5	0,7 - 5,4	0,9 - 6,5	0,4 - 2,4	0,5 - 3,0	0,6 - 3,6
		40 °C		50 °C	Min - Max	kW	0,5 - 3,9	0,6 - 4,7	0,7 - 5,7	0,3 - 2,1	0,4 - 2,6	0,5 - 3,2

MT	Cooling capacity at					R449A/R448A			R134a/R513A			
	ET					-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C	
WCU-KRC070M08	WT	15 °C	CT	30 °C	Min - Max	kW	1,1 - 7,4	1,3 - 8,9	1,6 - 10,5	0,5 - 3,7	0,6 - 4,5	0,7 - 5,5
		30 °C		40 °C	Min - Max	kW	0,9 - 6,3	1,1 - 7,7	1,3 - 9,3	0,5 - 3,4	0,6 - 4,2	0,7 - 5,1
		40 °C		50 °C	Min - Max	kW	0,7 - 5,5	0,9 - 6,7	1,1 - 8,1	0,5 - 2,9	0,5 - 3,6	0,6 - 4,5

MT	Cooling capacity at					R449A/R448A			R134a/R513A			
	ET					-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C	
WCU-KSC100M08	WT	15 °C	CT	30 °C	Min - Max	kW	3,3 - 11,2	4,0 - 13,7	4,8 - 16,6	2,1 - 5,5	2,6 - 6,8	3,2 - 8,5
		30 °C		40 °C	Min - Max	kW	1,9 - 8,8	2,8 - 11,1	3,8 - 13,9	1,8 - 4,9	2,2 - 6,1	2,7 - 7,6
		40 °C		50 °C	Min - Max	kW	0,8 - 6,7	1,9 - 9,0	2,9 - 11,6	1,5 - 4,3	1,9 - 5,4	2,3 - 6,8

MT	Cooling capacity at					R449A/R448A			R134a/R513A			
	ET					-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C	
WCU-KSC160M08	WT	15 °C	CT	30 °C	Min - Max	kW	3,3 - 17,9	4,0 - 22,2	4,8 - 27,2	2,1 - 10,1	2,6 - 12,4	3,2 - 15,1
		30 °C		40 °C	Min - Max	kW	1,9 - 14,2	2,8 - 18,1	3,8 - 22,8	1,8 - 8,8	2,2 - 10,8	2,7 - 13,3
		40 °C		50 °C	Min - Max	kW	0,8 - 11,1	1,9 - 14,7	2,9 - 19,0	1,5 - 7,7	1,9 - 9,5	2,3 - 11,7

MT	Cooling capacity at					R449A/R448A			R134a/R513A		
	ET					-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
WCU-KSC190M08	WT	15 °C	30 °C	Min - Max	kW	3,3 - 21,4	4,0 - 26,6	4,8 - 32,7	2,1 - 12,5	2,6 - 15,2	3,2 - 18,6
		30 °C	40 °C	Min - Max	kW	1,9 - 17,0	2,8 - 21,8	3,8 - 27,4	1,8 - 10,9	2,2 - 13,3	2,7 - 16,3
		40 °C	50 °C	Min - Max	kW	0,8 - 13,3	1,9 - 17,7	2,9 - 22,8	1,5 - 9,4	1,9 - 11,6	2,3 - 14,3

MT	Cooling capacity at					R449A/R448A			R134a/R513A			
	ET					-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C	
WCU-KSC280M08	WT	15 °C	CT	30 °C	Min - Max	kW	4,7 - 29,2	5,9 - 36,9	7,4 - 46,0	2,5 - 18,8	3,3 - 23,8	4,1 - 29,9
		30 °C		40 °C	Min - Max	kW	4,0 - 24,5	5,0 - 30,5	6,2 - 37,9	2,0 - 15,9	2,6 - 19,9	3,3 - 24,8
		40 °C		50 °C	Min - Max	kW	3,3 - 20,4	4,2 - 25,2	5,2 - 31,2	1,5 - 13,3	2,0 - 16,4	2,6 - 20,4

MT	Cooling capacity at					R449A/R448A			R134a/R513A			
	ET					-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C	
WCU-KSC400M08	WT	15 °C	CT	30 °C	Min - Max	kW	5,1 - 38,3	6,8 - 47,7	9,2 - 59,4	3,3 - 27,4	4,2 - 34,0	5,2 - 42,0
		30 °C		40 °C	Min - Max	kW	4,7 - 33,3	5,9 - 41,0	7,4 - 50,7	2,9 - 23,5	3,6 - 29,0	4,5 - 35,7
		40 °C		50 °C	Min - Max	kW	3,8 - 28,7	4,9 - 35,2	6,1 - 43,2	2,5 - 20,0	3,1 - 24,5	3,9 - 30,1

LT	Cooling capacity at					R449A/R448A					
	ET					-35 °C	-30 °C	-25 °C			
WCU-KRC020L08	WT	15 °C	CT	30 °C	Min - Max	kW	0,3 - 2,2	0,4 - 2,7	0,5 - 3,4		
		30 °C		40 °C	Min - Max	kW	0,2 - 1,7	0,3 - 2,2	0,4 - 2,8		
		40 °C		50 °C	Min - Max	kW	— — —	0,2 - 1,8	0,3 - 2,3		

LT	Cooling capacity at					R449A/R448A					
	ET					-35 °C	-30 °C	-25 °C			
WCU-KRC035L08	WT	15 °C	CT	30 °C	Min - Max	kW	0,4 - 3,3	0,5 - 4,0	0,7 - 4,9		
		30 °C		40 °C	Min - Max	kW	0,3 - 2,6	0,4 - 3,3	0,5 - 4,1		
		40 °C		50 °C	Min - Max	kW	— — —	0,3 - 2,8	0,4 - 3,5		

LT	Cooling capacity at					R449A/R448A					
	ET					-35 °C	-30 °C	-25 °C			
WCU-KRC050L08	WT	15 °C	CT	30 °C	Min - Max	kW	1,2 - 5,8	1,5 - 7,1	1,9 - 8,7		
		30 °C		40 °C	Min - Max	kW	1,1 - 4,6	1,4 - 5,8	1,7 - 7,3		
		40 °C		50 °C	Min - Max	kW	— — —	1,2 - 5,0	1,5 - 6,3		

LT	Cooling capacity at					R449A/R448A					
	ET					-35 °C	-30 °C	-25 °C			
WCU-KSC090L08	WT	15 °C	CT	30 °C	Min - Max	kW	2,6 - 8,2	3,3 - 10,1	4,2 - 12,6		
		30 °C		40 °C	Min - Max	kW	2,0 - 7,3	2,6 - 9,1	3,3 - 11,4		
		40 °C		50 °C	Min - Max	kW	— — —	2,0 - 8,3	2,6 - 10,3		

*ET: Evaporating Temperature. WT: Water (or glycol) inlet temperature. CT: Condensing Temperature.

Customisation options for iCOOL A2L and HFC/HFO range

The series offers customisable models that meet customer requirements.

- Factory pre-assembled options (customisation options), tested and ready-to-use options list – cutting installation time and reducing labour costs*
- Up to 3 customisation options selectable**

*The final model name is composed with the customisation selections. **Only for iCOOL OCU/SCU Series. Available configurations vary by series. ***Blygold condenser coating.



COATING***



HEAT RECOVERY –
DIRECT CONNECTIONS



HIGH PRESSURE FAN

iCOOL SE Series – A2L and HFC/HFO condensing units

Series	Application	Base model	Customisation options		Model
			Coating (C)	Heat recovery (D)	
iCOOL SE	MT	OCU-LRC100M08	Base model. No options chosen.	—	OCU-LRC100M08
	Other iCOOL SE models are not customizable		✓	—	OCU-LRC100M08-C

iCOOL OCU/SCU Series – HFC/HFO condensing units

Series	Application	Base model	Customisation options			Model
			Coating (C)	Heat recovery (D)	HP Fan (P)	
OCU	MT	OCU-KRC045M08 OCU-KRC070M08 OCU-KRC100M08	Base model. No options chosen.			OCU-KRC***M08
			✓	—	—	OCU-KRC***M08-C
			—	✓	—	OCU-KRC***M08-D
			—	—	✓	OCU-KRC***M08-P
			✓	✓	—	OCU-KRC***M08-CD
			✓	—	✓	OCU-KRC***M08-CP
			—	✓	✓	OCU-KRC***M08-DP
			✓	✓	✓	OCU-KRC***M08-CDP
		OCU-KSC120M08 OCU-KSC150M08	Base model. No options chosen.			OCU-KSC***M08
			✓	—	—	OCU-KSC***M08-C
			—	✓	—	OCU-KSC***M08-D
			—	—	✓	OCU-KSC***M08-P
			✓	✓	—	OCU-KSC***M08-CD
			✓	—	✓	OCU-KSC***M08-CP
			—	✓	✓	OCU-KSC***M08-DP
			✓	✓	✓	OCU-KSC***M08-CDP
		OCU-KSC160M08 OCU-KSC190M08 OCU-KSC240M08 OCU-KSC280M08 OCU-KSC400M08 OCU-KSC420M08	Base model. No options chosen.			OCU-KSC***M08
			✓	—	—	OCU-KSC***M08-C
			—	✓	—	OCU-KSC***M08-D
			✓	✓	—	OCU-KSC***M08-CD
			—	—	—	OCU-KSC***M08
			—	✓	Standard	OCU-KSC***M08-D
			✓	—	—	OCU-KRC***L08
			—	✓	—	OCU-KRC***L08-C
OCU	LT	OCU-KRC035L08 OCU-KRC050L08	—	—	—	OCU-KRC***L08-D
			✓	—	✓	OCU-KRC***L08-P
			✓	✓	—	OCU-KRC***L08-CD
			✓	—	✓	OCU-KRC***L08-CP
			—	✓	✓	OCU-KRC***L08-DP
			✓	✓	✓	OCU-KRC***L08-CDP
			Base model. No options chosen.			OCU-KSC***L08
			✓	—	—	OCU-KSC***L08-C
OCU	LT	OCU-KSC090L08 OCU-KSC140L08	—	✓	—	OCU-KSC***L08-D
			✓	✓	—	OCU-KSC***L08-CD
			Base model. No options chosen.			SCU-KSC***M08
			✓	—	Standard	SCU-KSC***M08-C
SCU	MT	SCU-KSC160M08 SCU-KSC190M08	—	✓	—	SCU-KSC***M08-D
			✓	✓	—	SCU-KSC***M08-CD
			Base model. No options chosen.			SCU-KSC090L08
			✓	—	Standard	SCU-KSC090L08-C
	LT	SCU-KSC090L08	—	✓	—	SCU-KSC090L08-D
			✓	✓	—	SCU-KSC090L08-CD
			Base model. No options chosen.			SCU-KSC090L08
			✓	—	Standard	SCU-KSC090L08-C

iCOOL LCU/WCU Series – HFC/HFO compressor base/condensing units

Series	Application	Base model	Customisation options	Example model
			Housing (H)	
LCU	MT	LCU-KRC***M08 / LCU-KSC***M08 / LCU-KRC***L08 / LCU-KSC***L08	Base model. No options chosen.	LCU-KRC***M08
WCU	LT	WCU-KRC***M08 / WCU-KSC***M08 / WCU-KRC***L08 / WCU-KSC***L08	✓	LCU-KRC***M08-H

Accessories and compatibility – iCOOL A2L and HFC/HFO range

Oil



Compressor oil FV68S 2,0 L.

CZ-HFC-FV68SL20

Compressor oil FV68S 500 ml.

CZ-HFC-FV68SL05

Oil



Compressor oil FV32S 2,0 L.

CZ-HFC-FV32SL20

Compressor oil FV32S 500 ml.

CZ-HFC-FV32SL05

Accessories (can be ordered separately)

iCOOL SE Series – A2L and HFC/HFO condensing units*

Model	OCU-	LRE/KRE025M05	LRE/KRE045M05	LRE/KRE070M05	LRC100M08	LRE/KRE012L05	LRE/KRE022L05	LRE/KRE030L05
Compressor oil FV68S 2,0 L.	CZ-HFC-FV68SL20	•	•	•	•	•	•	•
Compressor oil FV68S 500 ml.	CZ-HFC-FV68SL05	•	•	•	•	•	•	•
Compressor oil FV32S 2,0 L.	CZ-HFC-FV32SL20							
Compressor oil FV32S 500 ml.	CZ-HFC-FV32SL05							

iCOOL OCU/SCU Series – HFC/HFO condensing units

Model		OCU-KRC 045M08	OCU-KRC 070M08	OCU-KRC 100M08	OCU-KSC 120M08	OCU-KSC 150M08	OCU-KSC 160M08	OCU-KSC 190M08	OCU-KSC 240M08	OCU-KSC 280M08
Compressor oil FV68S 2,0 L.	CZ-HFC-FV68SL20	•	•	•	•	•	•	•	•	•
Compressor oil FV68S 500 ml.	CZ-HFC-FV68SL05	•	•	•	•	•	•	•	•	•
Compressor oil FV32S 2,0 L.	CZ-HFC-FV32SL20									
Compressor oil FV32S 500 ml.	CZ-HFC-FV32SL05									

Model		OCU-KSC 400M08	OCU-KSC 420M08	OCU-KRC 035L08	OCU-KRC 050L08	OCU-KSC 090L08	OCU-KSC 140L08	SCU-KSC 160M08	SCU-KSC 190M08	SCU-KSC 090L08
Compressor oil FV68S 2,0 L.	CZ-HFC-FV68SL20	•	•	•	•			•	•	
Compressor oil FV68S 500 ml.	CZ-HFC-FV68SL05	•	•	•	•			•	•	
Compressor oil FV32S 2,0 L.	CZ-HFC-FV32SL20					•	•			•
Compressor oil FV32S 500 ml.	CZ-HFC-FV32SL05					•	•			•

iCOOL LCU Series – HFC/HFO compressor base units

Model		LCU-KRC 045M08	LCU-KRC 070M08	LCU-KSC 100M08	LCU-KSC 160M08	LCU-KSC 190M08	LCU-KSC 280M08	LCU-KSC 400M08	LCU-KRC 020L08	LCU-KRC 035L08	LCU-KRC 050L08	LCU-KSC 090L08
Compressor oil FV68S 2,0 L.	CZ-HFC-FV68SL20	•	•	•	•	•	•	•	•	•	•	
Compressor oil FV68S 500 ml.	CZ-HFC-FV68SL05	•	•	•	•	•	•	•	•	•	•	
Compressor oil FV32S 2,0 L.	CZ-HFC-FV32SL20											•
Compressor oil FV32S 500 ml.	CZ-HFC-FV32SL05											•

iCOOL WCU Series – HFC/HFO condensing units

Model		WCU-KRC 045M08	WCU-KRC 070M08	WCU-KSC 100M08	WCU-KSC 160M08	WCU-KSC 190M08	WCU-KSC 280M08	WCU-KSC 400M08	WCU-KRC 020L08	WCU-KRC 035L08	WCU-KRC 050L08	WCU-KSC 090L08
Compressor oil FV68S 2,0 L.	CZ-HFC-FV68SL20	•	•	•	•	•	•	•	•	•	•	
Compressor oil FV68S 500 ml.	CZ-HFC-FV68SL05	•	•	•	•	•	•	•	•	•	•	
Compressor oil FV32S 2,0 L.	CZ-HFC-FV32SL20											•
Compressor oil FV32S 500 ml.	CZ-HFC-FV32SL05											•

*Accessories compatibility data for iCOOL SE OCU-LRE models is tentative.

PACi NX Elite can cool rooms down to 8 °C

PACi

Panasonic PACi NX Elite offers a high quality and efficient solution for high temperature refrigeration applications for facilities such as wine cellars, food processing facilities and supermarkets.



Cooling rooms between 8 °C WB and 24 °C WB




Alternative controller.

Wired remote control.
CZ-RTC6W/WBL/WBLW2
or CZ-RTC6/BL/BLW2.



Wide range of indoor units.
To meet your needs.

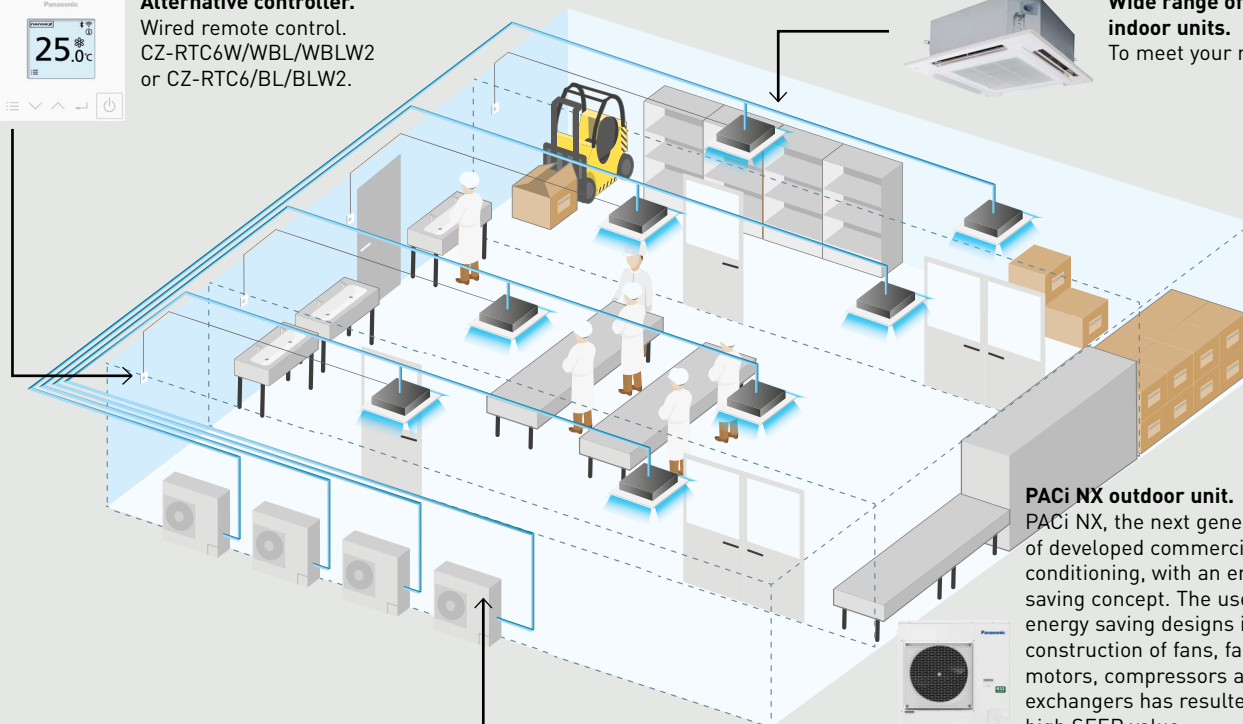

PACi NX outdoor unit.

PACi NX, the next generation of developed commercial air conditioning, with an energy saving concept. The use of energy saving designs in the construction of fans, fan motors, compressors and heat exchangers has resulted in a high SEER value.


- Flexibility with different type of indoors
- Benefits of hydroxyl radicals
- Provides wide scale of control options (individual, central, remote multi-site monitoring)
- Redundancy for 2 systems with CONEX controller range and up to 4 indoor unit groups with PAW-PACR4 optional redundancy controller



Wine cellars and special high temperature rooms

One of the main features of the PACi NX series is the possibility of adjusting the product for special applications, not just for regular cooling applications. The purpose of this product information is to explain in detail these special applications that need a cooling operation to maintain the room temperature at +8 ~ +24 °C WB (or +10 ~ +30 °C DB). In order to do this in terms of enthalpy, the indoor unit needs to be oversized and certain parameters need to be adjustable.

Temperature range for wine cellar.
In cooling. Outdoor air intake temperature °C DB.

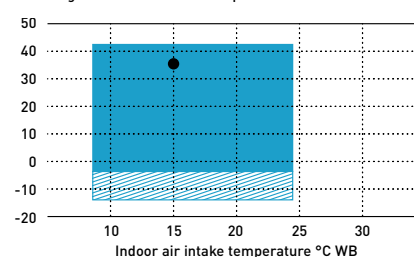

Only allowed after installation of wind and snow vents.

Area where cooling capacity is established for this purpose.

Temperature range		
	Indoor	Outdoor
Cooling operation	+8 ~ +24 °C WB	-5 [-15] ~ 43 °C DB

Bringing nature's balance indoors




nanoe™ X, technology with the benefits of hydroxyl radicals.

Abundant in nature, hydroxyl radicals (also known as OH radicals) have the capacity to inhibit pollutants, viruses, and bacteria to clean and deodorise. nanoe™ X technology can bring these incredible benefits indoors so that hard surfaces, soft furnishings, and the indoor environment can be a cleaner and more pleasant place to be.



What is unique about nanoe™ X?

Effective on fabrics and surfaces.



1 | At one billionth of a metre, nanoe™ X is much smaller than steam and can deeply penetrate cloth fabrics to deodorise.

Longer lifespan.




2 | Contained in tiny water particles, nanoe™ X has a long lifespan, which is about 600 seconds, to spread easily around the room.

Huge quantity.



3 | nanoe X Generator Mark 3 produces 48 trillion hydroxyl radicals per second. Greater amounts of hydroxyl radicals contained in nanoe™ X lead to higher performance on inhibition of pollutants.

Maintenance-free.



The image shows nanoe X Generator Mark 3.

4 | No service and maintenance required. nanoe™ X is a filter free solution that does not require maintenance, as its atomisation electrode is enveloped with water during its generation process and it is made with Titanium.


7 effects of nanoe™ X – Panasonic unique technology

Deodorises




Odours

Capacity to inhibit 5 types of pollutants



Bacteria and viruses



Mould



Allergens



Pollen



Hazardous substances



Skin and hair

*Refer to <https://aircon.panasonic.eu> for more details and validation data.

First nanoe™ device was developed by Panasonic in 2003


Generator: nanoe™

2003

480 billion hydroxyl radicals/sec

Ion particle structure

Hydroxyl radicals




Generator: nanoe™ X

Mark 1 - 2016

4,8 trillion hydroxyl radicals/sec


10x times



Mark 2 - 2019

9,6 trillion hydroxyl radicals/sec


20x times



Mark 3 - 2022

48 trillion hydroxyl radicals/sec

100x times



nanoe™ X, internationally-validated technology in testing facilities.

The effectiveness of nanoe™ X technology has been tested by 3rd party laboratories in Germany, France, Denmark, Japan and China.

The nanoe™ X performance varies depending on the room size, environment and usage and it may take several hours to reach the full effect. nanoe™ X is not medical device, local regulations on building design and sanitary recommendations must be followed. Test results conducted under controlled laboratory conditions. Performance of nanoe™ X might differ in real life environment.

	Tested contents		Generator	Result	Capacity	Time	Testing organisation	Report No.
Airborne	Virus	Influenza (H1N1)	Mark 2	98,3% inhibited	30 m³	1,5 h	China Electronic Product Reliability and Environmental Testing Research Institute	J2003WT8888-00889
		Bacteriophage ΦX174	Mark 1	99,2% inhibited	Approx. 25 m³	6 h	Kitasato Research Center for Environmental Science	24_0300_1
	Bacteria	Staphylococcus aureus	Mark 1	99,7% inhibited	Approx. 25 m³	4 h	Kitasato Research Center for Environmental Science	24_0301_1
Adhering	Virus	SARS-CoV-2	Mark 1	91,4% inhibited	6,7 m³	8 h	Texcell (France)	1140-01 C3
		SARS-CoV-2	Mark 1	99,9% inhibited	45 L	2 h	Texcell (France)	1140-01 A1
		Bacteriophage ΦX174	Mark 1	99,8% inhibited	Approx. 25 m³	8 h	Japan Food Research Laboratories	13001265005-01
		Xenotropic murine leukemia virus	Mark 1	99,999% inhibited	45 L	6 h	Charles River Biopharmaceutical Services GmbH	—
		Coxsackie virus (CA16)	Mark 2	99,9% inhibited	30 m³	4 h	China Electronic Product Reliability and Environmental Testing Research Institute	J2002WT8888-00439
		Bacteriophage	Mark 3	98,81% inhibited	Approx. 139,3 m³	4 h	SGS Inc	SHES210901902584
		MS2 Phage Virus	Mark 3	99,99% inhibited	Approx. 25 m³	2 h	Shokukanken, Inc.	227131N
	Bacteria	Staphylococcus aureus	Mark 1	99,9% inhibited	20 m³	8 h	Danish Technological Institute	868988
	Pollen	Cedar pollen	Mark 3	99% inhibited	Approx. 24 m³	12 h	Panasonic Product Analysis Center	H21YA017-1
		Ambrosia pollen	Mark 1	99,4% inhibited	20 m³	8 h	Danish Technological Institute	868988
	Odours	Cigarette smoke odour	Mark 1	Odour intensity reduced by 2,4 levels	Approx. 23 m³	0,2 h	Panasonic Product Analysis Center	4AA33-160615-N04
			Mark 3	Odour intensity reduced 1,7 levels	Approx. 139,3 m³	0,5 h	SGS Inc	SHES210901902478

Meets the requirements of VDI 6022 and HACCP

Certified under VDI 6022, meeting one of the strictest hygiene requirements on the market for HVAC systems, and aligned with HACCP-based food-safety practices.



VDI 6022 – Part 5 ¹⁾ Certification.

Avoidance of allergenic exposure.
Inhibits a wide range of harmful bacteria, viruses, mould, pollen and allergens.



VDI 6022 – Part 1 ¹⁾ & 1.1 ²⁾ Certification.

Ventilation and indoor-air quality.
Panasonic nanoe™ X technology improving indoor air quality.



HACCP Food Safety Certified ³⁾ – Europe's first HVAC manufacturer.

1) Certification mark only valid for nanoe X Generator Mark 3. 2) Certification mark only valid for nanoe X Generator Mark 2 and Mark 3. 3) Applicable to PACi NX and ECOi indoor units equipped with nanoe X Generator Mark 3.

nanoe™ X: improving protection 24/7.

Acts to clean the work area, such as meat or fish handling in hotel kitchens, food handling in industrial processes, laboratories, wine cellars, etc. So that the indoor environment can be a cleaner and more pleasant place to be all day long and keep the processes in better bacterial conditions.

nanoe™ X works together with the cooling function when during the day but can work independently when the area is not occupied.

Give the system the strength to increase the protection of persons, air, colds stuffs and working surfaces with nanoe™ X technology and convenient control via the Panasonic Comfort Cloud App.

Cleans the air even when there is no work activity.

Leave the nanoe™ X mode ON to inhibit certain pollutants and deodorize before start the work activity again.



Improves your environment and better protects the products handled when you are or not at work.

Enjoy a cleaner comfortable space both when working indoors and simply when it comes to better protecting products in the cold room.

Panasonic Heating & Cooling Solutions is incorporating nanoe™ technology in a wide range of equipment



Wall-mounted.
Built-in nanoe X Generator Mark 3.



Ceiling.
Built-in nanoe X Generator Mark 2.



4 Way 90x90 cassette.
Built-in nanoe X Generator Mark 1.



Adaptive ducted unit.
Built-in nanoe X Generator Mark 2.

PACi NX Series Elite wall-mounted - PK4 - R32

For light refrigeration applications.



nanoe™ X as a standard.

			High temperature							
KIT			36	50	60	71	100	125	140	
INDOOR UNIT - 1			S-5010PK4E	S-5010PK4E	S-5010PK4E	S-5010PK4E	S-5010PK4E	S-5010PK4E	S-5010PK4E	
INDOOR UNIT - 2						S-5010PK4E	S-5010PK4E	S-5010PK4E	S-5010PK4E	
OUTDOOR UNIT			U-36PZH3E5	U-50PZH3E5	U-60PZH3E5	U-71PZH4E5/8	U-100PZH4E5/8	U-125PZH4E5/8	U-140PZH4E5/8	
Outdoor 35 °C (DB)	Indoor 15 °C (WB)	Cooling capacity	kW	3,50	4,90	5,80	6,90	8,80	11,60	13,00
		EER		4,27	3,83	3,45	3,40	3,15	3,41	3,61
		Input power	kW	0,82	1,28	1,68	2,03	2,79	3,40	3,60
	Indoor 12 °C (WB)	Cooling capacity	kW	3,19	4,46	5,28	6,28	8,01	10,56	11,83
		EER		3,96	3,55	3,21	3,16	2,93	3,17	3,35
		Input power	kW	0,80	1,25	1,65	1,99	2,73	3,33	3,53
	Indoor 8 °C (WB)	Cooling capacity	kW	2,10	2,94	3,48	4,14	5,28	6,96	7,80
		EER		3,28	2,94	2,66	2,62	2,42	2,62	2,78
		Input power	kW	0,64	1,00	1,31	1,58	2,18	2,65	2,81
Outdoor 30 °C (DB)	Indoor 15 °C (WB)	Cooling capacity	kW	3,75	5,24	5,92	7,04	9,42	12,41	13,91
		EER		4,96	4,45	3,75	3,69	3,66	3,97	4,20
		Input power	kW	0,75	1,18	1,58	1,91	2,57	3,13	3,31
	Indoor 12 °C (WB)	Cooling capacity	kW	3,43	4,80	5,39	6,42	8,62	11,37	12,74
		EER		4,65	4,17	3,49	3,44	3,43	3,71	3,93
		Input power	kW	0,74	1,15	1,55	1,87	2,51	3,06	3,24
	Indoor 8 °C (WB)	Cooling capacity	kW	2,10	2,94	3,48	4,14	5,28	6,96	7,80
		EER		3,66	3,28	2,88	2,83	2,70	2,92	3,09
		Input power	kW	0,57	0,90	1,21	1,46	2,15	2,38	2,52
Indoor unit	Dimension (HxWxD)		mm	295 x 1060 x 249	295 x 1060 x 249	295 x 1060 x 249	295 x 1060 x 249	295 x 1060 x 249	295 x 1060 x 249	
	Net weight		kg	14	14	14	14	14	14	
	nanoe X Generator			Mark 3	Mark 3	Mark 3	Mark 3	Mark 3	Mark 3	
Outdoor unit	Dimension (HxWxD)		mm	695 x 875 x 320	695 x 875 x 320	695 x 875 x 320	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370	
	Net weight		kg	42	42	43	66	84	86	

Accessories

CZ-RTC6W	CONEX wired remote controller (non-wireless), white
CZ-RTC6WBL	CONEX wired remote controller with Bluetooth®, white
CZ-RTC6WBLW2	CONEX wired remote controller with Wi-Fi and Bluetooth®, white
CZ-RTC6	CONEX wired remote controller (non-wireless), black
CZ-RTC6BL	CONEX wired remote controller with Bluetooth®, black
CZ-RTC6BLW2	CONEX wired remote controller with Wi-Fi and Bluetooth®, black
CZ-RTC5B	Wired remote controller with Econavi function
CZ-RWS3	Infrared remote controller

Accessories

PAW-PACR4	Interface to run up to 4 indoor unit groups on backup and alternative run
PAW-WTRAY	Tray for condenser water compatible with outdoor elevation platform
PAW-GRDBSE20	Outdoor base ground support for noise and vibration absorption
PAW-GRDSTD40	Outdoor elevation platform 400 x 900 x 400 mm
CZ-CENSC1	Econavi energy saving sensor

Technical focus

- Modern, flat design with a stylish matte white finish featuring
- DC fan for better efficiency and control
- Five-direction automatic air flow adjustment for cooling and heating
- Six directional piping outlet
- Quiet operation
- nanoe™ X (Generator Mark 3: 48 trillion hydroxyl radicals/sec) as standard for better indoor air quality
- Wired remote control CZ-RTC6WBL and CZ-RTC6BL allows easy system setting via Bluetooth®
- Easy connection and control of external fan or ERV using the connector PAW-FDC on the indoor unit PCB. The external device can be controlled by the remote control of the Panasonic indoor unit


Closed discharge port

When the unit is turned OFF, the flap closes completely to prevent dust getting into the unit and to keep the equipment clean.

Piping outlet in six directions

Piping outlet is possible in six directions of; right, right rear, right bottom, left, left rear and left bottom, making the installation work more flexible.

Air distribution is automatically altered depending on the operational mode of the unit



PACi NX Series Elite 4 way 90x90 cassette - PU3 - R32

For light refrigeration applications.



nanoe™ X as a standard.

				High temperature								
KIT				36	50	60	71	100	125	140	200	250
INDOOR UNIT - 1				S-6071PU3E	S-6071PU3E	S-1014PU3E	S-1014PU3E	S-1014PU3E	S-1014PU3E	S-1014PU3E	S-1014PU3E	S-1014PU3E
INDOOR UNIT - 2				—	—	—	—	—	—	S-1014PU3E	S-1014PU3E	S-1014PU3E
OUTDOOR UNIT				U-36PZH3E5	U-50PZH3E5	U-60PZH3E5	U-71PZH4E5/8	U-100PZH4E5/8	U-125PZH4E5/8	U-140PZH4E5/8	U-200PZH4E8	U-250PZH4E8
Outdoor 35 °C (DB)	Indoor 15 °C (WB)	Cooling capacity	kW	3,50	4,90	5,80	6,90	8,80	11,60	13,00	18,50	23,20
		EER		5,12	4,05	3,81	3,67	4,09	3,47	3,82	3,38	2,97
		Input power	kW	0,68	1,21	1,52	1,88	2,15	3,34	3,40	5,48	7,82
	Indoor 12 °C (WB)	Cooling capacity	kW	3,19	4,46	5,28	6,28	8,01	10,56	11,83	16,84	21,11
		EER		4,78	3,76	3,54	3,41	3,80	3,22	3,55	3,13	2,75
		Input power	kW	0,67	1,19	1,49	1,84	2,11	3,27	3,33	5,37	7,66
	Indoor 8 °C (WB)	Cooling capacity	kW	2,10	2,94	3,48	4,14	5,28	6,96	7,80	11,10	13,92
		EER		3,96	3,12	2,94	2,82	3,15	2,67	2,94	2,60	2,28
		Input power	kW	0,53	0,94	1,19	1,47	1,68	2,61	2,65	4,27	6,10
Outdoor 30 °C (DB)	Indoor 15 °C (WB)	Cooling capacity	kW	3,75	5,24	5,92	7,04	9,42	12,41	13,91	20,17	25,29
		EER		5,99	4,71	4,14	3,98	4,76	4,04	4,45	4,00	3,51
		Input power	kW	0,63	1,11	1,43	1,77	1,98	3,07	3,13	5,04	7,19
	Indoor 12 °C (WB)	Cooling capacity	kW	3,43	4,80	5,39	6,42	8,62	12,41	12,74	18,50	23,20
		EER		5,60	4,41	3,86	3,71	4,46	4,04	4,16	3,75	3,30
		Input power	kW	0,61	1,09	1,40	1,73	1,94	3,07	3,06	4,93	7,04
	Indoor 8 °C (WB)	Cooling capacity	kW	2,10	2,94	3,48	4,14	5,28	6,96	7,80	11,10	13,92
		EER		4,41	3,47	3,18	3,06	3,51	2,98	3,28	2,89	2,54
		Input power	kW	0,48	0,85	1,09	1,35	1,51	2,34	2,38	3,84	5,47
Indoor unit	Dimension (HxWxD)	mm	256x840x840	256x840x840	256x840x840	319x840x840	319x840x840	319x840x840	319x840x840	319x840x840	319x840x840	
	Net weight	kg	19	19	20	25	25	25	25	25	25	
Outdoor unit	nanoe X Generator			Mark 1	Mark 1	Mark 1	Mark 1	Mark 1	Mark 1	Mark 1	Mark 1	Mark 1
	Dimension (HxWxD)	mm	695x875x320	695x875x320	695x875x320	996x980x370	996x980x370	996x980x370	996x980x370	996x1140x460	996x1140x460	
	Net weight	kg	42	42	43	66	84	86	86	109	109	

Accessories

CZ-RTC6W	CONEX wired remote controller (non-wireless), white
CZ-RTC6WBL	CONEX wired remote controller with Bluetooth®, white
CZ-RTC6WBLW2	CONEX wired remote controller with Wi-Fi and Bluetooth®, white
CZ-RTC6	CONEX wired remote controller (non-wireless), black
CZ-RTC6BL	CONEX wired remote controller with Bluetooth®, black
CZ-RTC6BLW2	CONEX wired remote controller with Wi-Fi and Bluetooth®, black
CZ-RTC5B	Wired remote controller with Econavi function
CZ-RWS3 + CZ-RWRU3	Infrared remote controller and receiver

Accessories

CZ-KPU3A	Econavi exclusive panel, white (RAL9003)
CZ-KPU3B	Standard panel, graphite black (RAL9011)
PAW-WTRAY	Tray for condenser water compatible with outdoor elevation platform
PAW-GRDBSE20	Outdoor base ground support for noise and vibration absorption
PAW-GRDSTD40	Outdoor elevation platform 400x900x400 mm
CZ-FDU3 + CZ-ATU2	Fresh air-intake kit

Technical focus

- High performance turbo fan
- Econavi: An optional intelligent sensor to reduce waste of energy
- nanoe™ X (Generator Mark 1: 4,8 trillion hydroxyl radicals/sec) as standard for better indoor air quality, indoor unit internal cleaning with nanoe™ X plus dry operation
- Graphite black and white panels providing options to suit a variety of light commercial applications
- Lower noise in low fan operation
- Light weight, easy piping and integrated drain pump for quick installation
- Wired remote control CZ-RTC6WBL and CZ-RTC6BL allows easy system setting via Bluetooth®
- High volume fresh air input with optional air-intake plenum and chamber (CZ-FDU3 + CZ-ATU2)

White and graphite black panels available for the 4 way 90x90 cassette.

Standard panel, white (RAL9003).

CZ-KPU3



Econavi panel, white (RAL9003).

CZ-KPU3A



Standard panel, graphite black (RAL9011).

CZ-KPU3B



PACi NX Series Elite ceiling - PT3 - R32

For light refrigeration applications.



nanoe™ X as a standard.

		High temperature									
KIT		36	50	60	71	100	125	140	200	250	
INDOOR UNIT - 1		S-6071PT3E	S-6071PT3E	S-1014PT3E	S-1014PT3E	S-1014PT3E	S-1014PT3E	S-1014PT3E	S-1014PT3E	S-1014PT3E	
INDOOR UNIT - 2		—	—	—	—	—	—	S-1014PT3E	S-1014PT3E	S-1014PT3E	
OUTDOOR UNIT		U-36PZH3E5	U-50PZH3E5	U-60PZH3E5	U-71PZH4E5/8	U-100PZH4E5/8	U-125PZH4E5/8	U-140PZH4E5/8	U-200PZH4E8	U-250PZH4E8	
Outdoor 15 °C (WB)	Indoor	Cooling capacity	kW	3,50	4,90	5,80	6,60	8,80	11,20	13,00	23,20
		EER		4,67	3,71	3,63	3,53	3,76	3,15	3,40	2,92
		Input power	kW	0,75	1,32	1,60	1,87	2,34	3,56	3,82	7,94
	Indoor	Cooling capacity	kW	3,19	4,46	5,28	6,01	8,01	10,19	11,83	21,11
		EER		4,33	3,45	3,37	3,28	3,49	2,92	3,16	2,71
		Input power	kW	0,74	1,29	1,57	1,83	2,29	3,49	3,74	7,78
	Indoor	Cooling capacity	kW	2,10	2,94	3,48	3,96	5,28	6,72	7,80	13,92
		EER		3,59	2,86	2,79	2,71	2,89	2,42	2,62	2,25
		Input power	kW	0,59	1,03	1,25	1,46	1,83	2,78	2,98	6,19
Outdoor 35 °C (DB)	Indoor	Cooling capacity	kW	3,75	5,24	5,92	6,73	9,42	11,98	13,91	25,29
		EER		5,43	4,32	3,93	3,83	4,37	3,66	3,96	3,46
		Input power	kW	0,69	1,21	1,50	1,76	2,15	3,28	3,51	7,30
	Indoor	Cooling capacity	kW	3,43	4,80	5,39	6,14	8,62	10,98	12,74	23,20
		EER		5,08	4,04	3,66	3,57	4,09	3,43	3,71	3,25
		Input power	kW	0,68	1,19	1,47	1,72	2,11	3,20	3,44	7,15
	Indoor	Cooling capacity	kW	2,10	2,94	3,48	3,96	5,28	6,72	7,80	13,92
		EER		4,00	3,18	3,02	2,94	3,22	2,70	2,92	2,50
		Input power	kW	0,53	0,92	1,15	1,35	1,64	2,49	2,67	5,56
Indoor unit	Dimension (HxWxD)	mm	235x1275x690	235x1275x690	235x1590x690	235x1590x690	235x1590x690	235x1590x690	235x1590x690	235x1590x690	
	Net weight	kg	34	34	40	40	40	40	40	40	
	nanoe X Generator		Mark 2	Mark 2	Mark 2	Mark 2	Mark 2	Mark 2	Mark 2	Mark 2	
Outdoor unit	Dimension (HxWxD)	mm	695x875x320	695x875x320	695x875x320	996x980x370	996x980x370	996x980x370	996x980x370	996x1140x460	996x1140x460
	Net weight	kg	42	42	43	66	84	86	86	109	109

Accessories

CZ-RTC6W	CONEX wired remote controller (non-wireless), white
CZ-RTC6WBL	CONEX wired remote controller with Bluetooth®, white
CZ-RTC6WBLW2	CONEX wired remote controller with Wi-Fi and Bluetooth®, white
CZ-RTC6	CONEX wired remote controller (non-wireless), black
CZ-RTC6BL	CONEX wired remote controller with Bluetooth®, black
CZ-RTC6BLW2	CONEX wired remote controller with Wi-Fi and Bluetooth®, black
CZ-RTC5B	Wired remote controller with Econavi function

Accessories

CZ-RWS3 + CZ-RWRT3	Infrared remote controller and receiver
PAW-WTRAY	Tray for condenser water compatible with outdoor elevation platform
PAW-GRDBSE20	Outdoor base ground support for noise and vibration absorption
PAW-GRDSTD40	Outdoor elevation platform 400x900x400 mm
CZ-CENSC1	Econavi energy saving sensor

Technical focus

- Wide air distribution for large rooms
- Horizontal air flow reaches maximum 9,5 m
- Fresh air connection available on the unit
- Slim design with 235 mm height fits narrow space
- Silent operation
- nanoe™ X (Generator Mark 2: 9,6 trillion hydroxyl radicals/sec) as standard for better indoor air quality
- Wired remote control CZ-RTC6WBL and CZ-RTC6BL allows easy system setting via Bluetooth®
- Twin, Triple and Double-twin split options
- Easy connection and control of external fan or ERV using the connector PAW-FDC on the indoor unit PCB. The external device can be controlled by the remote control of the Panasonic indoor unit

Further comfort improvement with air flow distribution

Horizontal air flow reaches maximum 9,5 m. This is ideal for wide rooms.

The wide air discharge opening expands the air flow to the left and right. The unpleasant feeling caused when the air flow directly hits the human body is prevented by the "Draft prevention position", which changes the swing width, increasing the degree of comfort.

PACi NX Series Elite adaptive ducted unit - PF3 - R32

For light refrigeration applications.



nanoe™ X as a standard.

				High temperature								
KIT				36	50	60	71	100	125	140	200	250
INDOOR UNIT - 1				S-6071PF3E	S-6071PF3E	S-1014PF3E	S-1014PF3E	S-1014PF3E	S-1014PF3E	S-1014PF3E	S-1014PF3E	S-1014PF3E
INDOOR UNIT - 2				—	—	—	—	—	—	S-1014PF3E	S-1014PF3E	S-1014PF3E
OUTDOOR UNIT				U-36PZH3E5	U-50PZH3E5	U-60PZH3E5	U-71PZH4E5/8	U-100PZH4E5/8	U-125PZH4E5/8	U-140PZH4E5/8	U-200PZH4E8	U-250PZH4E8
Outdoor 35 °C (DB)	Indoor 15 °C (WB)	Cooling capacity	kW	3,50	4,90	5,80	6,60	8,80	11,20	13,00	18,50	23,20
		EER		3,98	3,20	3,52	3,37	3,79	3,21	3,59	3,50	3,08
		Input power	kW	0,88	1,53	1,65	1,96	2,32	3,49	3,62	5,29	7,54
	Indoor 12 °C (WB)	Cooling capacity	kW	3,19	4,46	5,28	6,01	8,01	10,19	11,83	16,84	21,11
		EER		3,69	2,97	3,26	3,13	3,52	2,98	3,33	3,25	2,86
		Input power	kW	0,86	1,50	1,62	1,92	2,27	3,42	3,55	5,18	7,39
	Indoor 8 °C (WB)	Cooling capacity	kW	2,10	2,94	3,48	3,96	5,28	6,72	7,80	11,10	13,92
		EER		3,06	2,46	2,70	2,59	2,92	2,47	2,76	2,69	2,37
		Input power	kW	0,69	1,19	1,29	1,53	1,81	2,72	2,82	4,13	5,88
Outdoor 30 °C (DB)	Indoor 15 °C (WB)	Cooling capacity	kW	3,75	5,24	5,92	6,73	9,42	11,98	13,91	20,17	25,29
		EER		4,63	3,72	3,81	3,65	4,41	3,73	4,18	4,14	3,65
		Input power	kW	0,81	1,41	1,55	1,84	2,13	3,21	3,33	4,87	6,94
	Indoor 12 °C (WB)	Cooling capacity	kW	3,43	4,80	5,39	6,14	8,62	10,98	12,74	18,50	23,20
		EER		4,33	3,49	3,55	3,40	4,13	3,49	3,91	3,89	3,42
		Input power	kW	0,79	1,38	1,52	1,80	2,09	3,14	3,26	4,76	6,79
	Indoor 8 °C (WB)	Cooling capacity	kW	2,10	2,94	3,48	3,96	5,28	6,72	7,80	11,10	13,92
		EER		3,41	2,75	2,93	2,81	3,25	2,75	3,08	3,00	2,64
		Input power	kW	0,62	1,07	1,19	1,41	1,62	2,44	2,53	3,70	5,28
Indoor unit	Dimension (H x W x D)	mm	250x1000x730	250x1000x730	250x1000x730	250x1400x730	250x1400x730	250x1400x730	250x1400x730	250x1400x730	250x1400x730	
	Net weight	kg	30	30	30	39	39	39	39	39	39	
	nanoe X Generator		Mark 2	Mark 2	Mark 2	Mark 2	Mark 2	Mark 2	Mark 2	Mark 2	Mark 2	
Outdoor unit	Dimension (H x W x D)	mm	695x875x320	695x875x320	695x875x320	996x980x370	996x980x370	996x980x370	996x980x370	996x1140x460	996x1140x460	
	Net weight	kq	42	42	43	66	84	86	84	109	109	

Accessories

CZ-RTC6W	CONEX wired remote controller (non-wireless), white
CZ-RTC6WBL	CONEX wired remote controller with Bluetooth®, white
CZ-RTC6WBLW2	CONEX wired remote controller with Wi-Fi and Bluetooth®, white
CZ-RTC6	CONEX wired remote controller (non-wireless), black
CZ-RTC6BL	CONEX wired remote controller with Bluetooth®, black
CZ-RTC6BLW2	CONEX wired remote controller with Wi-Fi and Bluetooth®, black
CZ-RTC5B	Wired remote controller with Econavi function
CZ-RWS3 + CZ-RWRC3	Infrared remote controller and receiver
PAW-WTRAY	Tray for condenser water compatible with outdoor elevation platform

Accessories

PAW-GRDBSE20	Outdoor base ground support for noise and vibration absorption
PAW-GRDSTD40	Outdoor elevation platform 400x900x400 mm
CZ-CENSC1	Econavi energy saving sensor
CZ-56DAF2	Air outlet plenum for S-3650PF3E
CZ-90DAF2	Air outlet plenum for S-6071PF3E
CZ-160DAF2	Air outlet plenum for S-1014PF3E
PAW-APF800F	BION air pollutant filter for S-3650PF3E
PAW-APF1000F	BION air pollutant filter for S-6071PF3E
PAW-APF1400F	BION air pollutant filter for S-1014PF3E

Technical focus

- 2 installation possibilities (horizontal / vertical)
- Maximum external static pressure: 150 Pa
- Selectable inlet air position (rear / bottom entry)
- Improved drain pan suitable for both horizontal / vertical installation
- Drain pump included
- nanoe™ X (Generator Mark 2: 9,6 trillion hydroxyl radicals/sec) as standard for the long duct piping case*
- BION air pollutant filter for certain types of pollutants, such as nitrogen dioxide (NO₂), nitrogen oxides (NO_x) and Ozone (O₃) (optional)
- Wired remote control CZ-RTC6WBL and CZ-RTC6BL allows easy system setting via Bluetooth®


*The performance of nanoe™ X air can be expected even by 10 m long duct by Panasonic internal survey.

2 installation possibilities (horizontal / vertical)

Vertical installation is available. External static pressure 150 Pa, sufficient for remotely installing units away from the rooms.

**Improved drain pan design**

Just one drain pan for both horizontal and vertical installations. No need to modify the unit.



PACi NX Jet Air Stream - R32

For light refrigeration applications.



				High temperature	
KIT				140	250
INDOOR UNIT ¹⁾				P-VTVF140	P-VTVF250
OUTDOOR UNIT				U-140PZH4E5/8	U-250PZH4E8
Outdoor 35 °C (DB)	Indoor 15 °C (WB)	Cooling capacity	kW	14,85	23,77
		EER		2,41	3,17
		Input power	kW	6,15	7,49
	Indoor 12 °C (WB)	Cooling capacity	kW	13,56	21,70
		EER		2,25	2,95
		Input power	kW	6,03	7,34
	Indoor 8 °C (WB)	Cooling capacity	kW	11,83	18,93
		EER		2,02	2,65
		Input power	kW	5,87	7,14
	Indoor 15 °C (WB)	Cooling capacity	kW	15,94	25,51
		EER		2,54	3,33
		Input power	kW	6,28	7,65
Outdoor 30 °C (DB)	Indoor 12 °C (WB)	Cooling capacity	kW	14,49	23,19
		EER		2,35	3,09
		Input power	kW	6,16	7,50
	Indoor 8 °C (WB)	Cooling capacity	kW	12,46	19,94
		EER		2,08	2,73
		Input power	kW	6,00	7,30
Indoor unit	Dimension (H x W x D)		mm	802 x 1105 x 893	1026 x 1458 x 953
	Net weight		kg	88	130
Outdoor unit	Dimension (H x W x D)		mm	996 x 980 x 370	996 x 1140 x 460
	Net weight		kg	86	109

1) The CONEX controller CZ-RTC6 (-BL/-BLW2) is not required.

Optional configurations*		Front panel type	Air flow (m³/h)
P-VTVF140NC5-PE	Jet Air Stream Standard	Manual nozzles	2500
P-VTVF250NC5-PE	Jet Air Stream Standard	Manual nozzles	5000
P-VTVF140PC5-PE	Jet Air Stream Ducted	Ducted front panel	2500
P-VTVF250PC5-PE	Jet Air Stream Ducted	Ducted front panel	5000


*The product technical data is the same as Jet Air Stream Smart.

Accessories	
CZ-RTC6W	CONEX wired remote controller (non-wireless), white
CZ-RTC6WBL	CONEX wired remote controller with Bluetooth®, white
CZ-RTC6WBLW2	CONEX wired remote controller with Wi-Fi and Bluetooth®, white
CZ-RTC6	CONEX wired remote controller (non-wireless), black
CZ-RTC6BL	CONEX wired remote controller with Bluetooth®, black
CZ-RTC6BLW2	CONEX wired remote controller with Wi-Fi and Bluetooth®, black
CZ-RTC5B	Wired remote controller with Econavi function
CZ-RWS3 + CZ-RWRC3	Infrared remote controller and receiver
CZ-CAPWFC2	Commercial Wi-Fi Adaptor




Technical focus

- Energy saving solution for year-round heating and cooling in large and high spaces
- High air volume up to 5000 m³/h and long maximum air throw distance of 30 m
- Optimal comfort with Smart Jet - self-directing nozzles

Accessories	
PCZ-AHRX0051	Ducted air intake plenum (1 x DN 355 mm) for VTVF140N and VTVF140P
PCZ-AHRX0052	Ducted air intake plenum (2 x DN 355 mm) for VTVF250N and VTVF250P
PCZ-AHRX0061	Ground air intake module (VTVF250 requires two of them)
PCZ-AHRX0071	Air supply grille for ducts

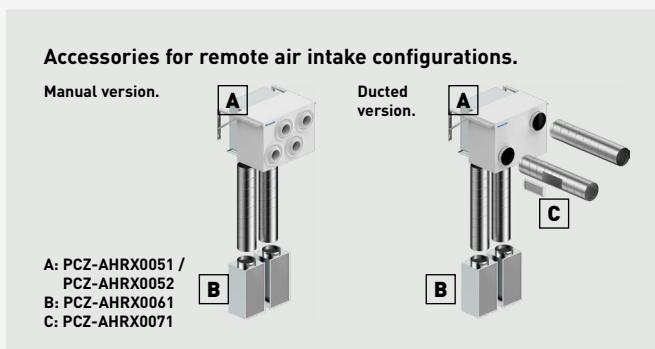

Accessories and control – PACi NX


Panels			IAQ filter for adaptive ducted unit		
				*Tentative image.	
Standard panel for 4 way 90x90 cassette, white (RAL9003).	Econavi panel for 4 way 90x90 cassette, white (RAL9003).	Standard panel for 4 way 90x90 cassette, graphite black (RAL9011).	BION air pollutant filter for S-3650PF3E.	BION air pollutant filter for S-6071PF3E.	BION air pollutant filter for S-1014PF3E.
----- CZ-KPU3	----- CZ-KPU3A	----- CZ-KPU3B	----- PAW-APF800F	----- PAW-APF1000F	----- PAW-APF1400F
Plenums			Special outdoor supports		
					
Air outlet plenum for S-3650PF3E.	Air outlet plenum for S-6071PF3E.	Air outlet plenum for S-1014PF3E.	Tray for condenser water compatible with outdoor elevation platform.	Outdoor elevation platform. Dimension (H x W x D): 400 x 900 x 400 mm	Outdoor base ground support for noise and vibration absorption. Dimension (H x W x D): 600 x 95 x 130 mm Safe working load: 500 kg
----- CZ-56DAF2	----- CZ-90DAF2	----- CZ-160DAF2	----- PAW-WTRAY	----- PAW-GRDSTD40	----- PAW-GRDBSE20
Individual controls					
					
CONEX wired remote controller (non-wireless), white.	CONEX wired remote controller with Bluetooth®, white.	CONEX wired remote controller with Wi-Fi and Bluetooth®, white.	CONEX wired remote controller (non-wireless), black.	CONEX wired remote controller with Bluetooth®, black.	CONEX wired remote controller with Wi-Fi and Bluetooth®, black.
----- CZ-RTC6W	----- CZ-RTC6WBL	----- CZ-RTC6WBLW2	----- CZ-RTC6	----- CZ-RTC6BL	----- CZ-RTC6BLW2
					
Design Wired remote controller with Econavi function.	Infrared remote controller for wall-mounted.	Infrared remote controller and receiver for 4 way 90x90 cassette.	Infrared remote controller and receiver for ceiling.	Infrared remote controller and receiver for all indoor units.	
----- CZ-RTC5B	----- CZ-RWS3	----- CZ-RWS3 + CZ-RWRU3	----- CZ-RWS3 + CZ-RWRT3	----- CZ-RWS3 + CZ-RWRC3	
Accessories PCB		Sensors			
					
PCB for server room application, control up to 4 indoor unit groups, redundancy, backup, etc.		Econavi energy saving sensor.			Fresh air-intake kit.
----- PAW-PACR4		----- CZ-CENSC1			----- CZ-FDU3+CZ-ATU2
Accessories for Jet Air Stream					
					
Ducted air intake plenum (1 x DN 355 mm) for VTVF140N and VTVF140P.	Ducted air intake plenum (2 x DN 355 mm) for VTVF250N and VTVF250P.	Ground air intake module (VTVF250 requires two of them).	Air supply grille for ducts.		
----- PCZ-AHRX0051	----- PCZ-AHRX0052	----- PCZ-AHRX0061	----- PCZ-AHRX0071		

To find out how Panasonic cares for you,
log on to: www.aircon.panasonic.eu/GB_en

Panasonic Heating & Ventilation Air Conditioning UK Ltd
Building 3, Albany Place, Hydeway, W
elwyn Garden City, AL7 3BT



Do not add or replace refrigerant other than the specified type. Manufacturer is not responsible for the damage and deterioration in safety due to usage of the other refrigerant.
The outdoor units in this catalogue contains fluorinated greenhouse gases with a GWP higher than 150.

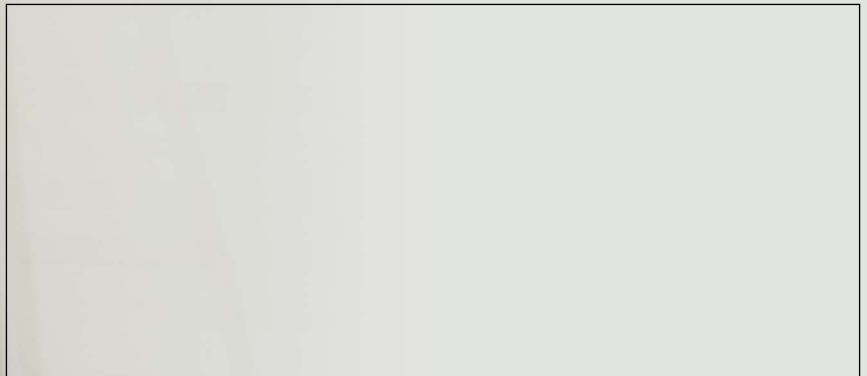

Due to the ongoing innovation of our products, the specifications of this catalogue are valid barring typographic errors, and may be subject to minor modifications by the manufacturer without prior warning in order to improve the product. The total or partial reproduction of this catalogue is prohibited without the express authorisation of Panasonic Marketing Europe GmbH.
Please refer to the detailed technical data in the technical manuals for the final design and installation.