



Multi split systems

When the heating and cooling requirements exceed the scope of a single room, Panasonic offers a wide range of options with a multi split solution.

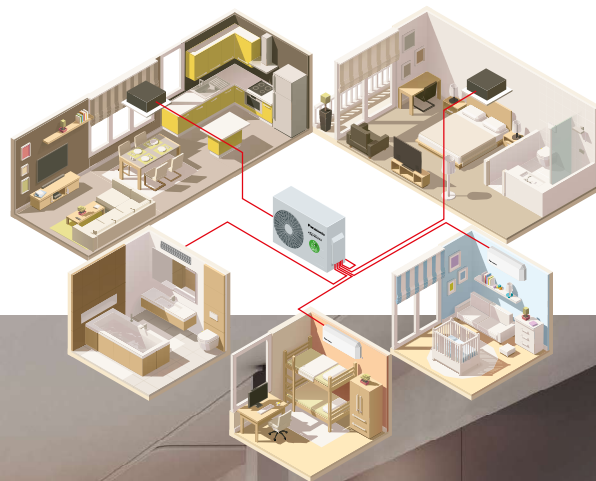

Panasonic multi split systems - a range to suit every need.
High flexibility in installation, while reducing aesthetic impact and maximising comfort.




Multiple indoor units with only one outdoor.

Individual control of each indoor.



Wide range of connectable units.

Wall-mounted, floor console and cassette with nanoe™ X.



Seamless integration of outdoor unit.

Reduced outdoor unit space, harmonizing with building architecture.



Reduced installation time.


Faster piping connection and pump-down time.

Why choose a multi split system?

With one indoor unit per room or area with individual control, it is easy to achieve the desired level of comfort throughout the home.

Outside, there is only one unit, which reduces the space required for the outdoor unit, improves the aesthetics of the building and makes installation easier.

Solution with multi split.

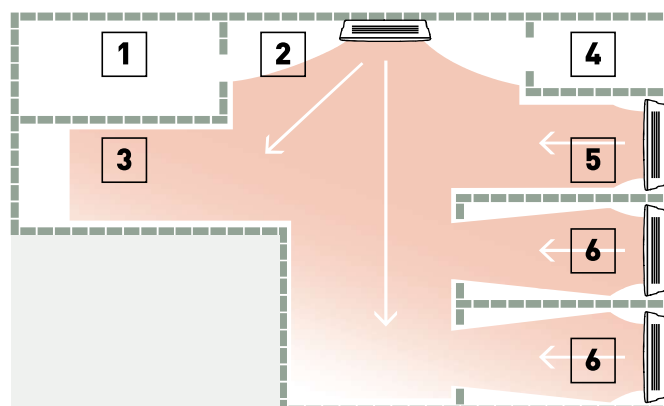

1. Laundry room. 2. Entrance. 3. Kitchen / dining area. 4. Bathroom. 5. Living room. 6. Bedroom.

Free Multi system. High flexibility for maximising comfort.


Full flexibility up to 9,0 kW and up to 5 ports with wide range of indoor units including high performance Etherea indoor units, reaching up to A+++ / A++.



Up to 5 indoor units
with only one outdoor.




Wide range of compatible
indoors with nanoe™ X.



SEER.
High energy efficiency class.

Power Heat Multi system. Reliable heating for cold winters.

Powerful heating of two or three rooms with one outdoor unit, even at -25 °C low outdoor temperatures.



Reliable heating
even at -25 °C.



Equipped with
base pan heater.



Excellent
maintainability.
Advantageous under harsh
conditions.

-25 °C outdoor temperature operation and base pan heater.

The heater prevents the outdoor unit base pan from freezing and ensures stable operation even in extremely cold regions.

Heating capacity at -25 °C outdoor temperature: 3,90 kW for the 2-room model and 4,30 kW for the 3-room model.

Efficiently heats 2 or 3 rooms using a single outdoor unit, even in low outdoor temperatures.

High efficiency SCOP 4,60 A++.

High heating efficiency contributes to environmental protection while reducing electricity bills.

Dark color outdoor unit.


First outdoor unit in dark color, blending seamlessly with home exteriors without compromising aesthetics.

Connectable to Etherea indoor units.

Comfort and convenience with nanoe™ X and built-in Wi-Fi, combined with excellent heating and cooling performance.



Multi wall TZ system. The super compact multi split solution.



Up to 3 indoor units with
only one outdoor.



Compact outdoor unit, to minimise
outdoor unit space.



Compatible with TZ super-
compact indoor units, with
nanoe™ X.

Free Multi system

Outdoor units Free Multi system - R32

- Up to 5 indoor units with a single outdoor unit
- Up to 5 rooms with individual control
- Etherea, TZ super-compact, floor console and 4 way 60x60 cassette with nanoe™ X technology to improve protection 24/7
- High energy efficiency class A+++ SEER
- Indoor units compatible with internet and voice control

Configure your multi split system in a few steps using our online tool and see all possible combinations.



Outdoor unit			CU-2Z35TBE	CU-2Z41TBE	CU-2Z50TBE	CU-3Z52TBE	CU-3Z68TBE	CU-4Z68TBE	CU-4Z80TBE	CU-5Z90TBE
Indoor nominal capacity (Min - Max)			3,2 ~ 6,0 kW	3,2 ~ 6,0 kW	3,2 ~ 7,7 kW	4,5 ~ 9,5 kW	4,5 ~ 11,2 kW	4,5 ~ 11,5 kW	4,5 ~ 14,7 kW	4,5 ~ 18,3 kW
Cooling capacity	Nominal	kW	3,50	4,10	5,00	5,20	6,80	6,80	8,00	9,00
	Min		1,50	1,50	1,50	1,80	1,90	1,90	3,00	2,90
	Max		4,50	5,20	5,40	7,30	8,00	8,80	9,20	11,50
EER ¹⁾	Nominal	W/W	4,86	4,56	4,24	4,77	3,66	4,39	4,04	4,09
	Min		6,00	6,00	6,00	—	7,04	5,59	5,66	5,27
	Max		4,09	3,80	3,62	—	3,38	3,56	3,21	2,98
SEER ²⁾			8,50 A+++	8,50 A+++	8,50 A+++	8,50 A+++	8,00 A++	8,00 A++	7,90 A++	8,50 A+++
Pdesign (cooling)		kW	3,50	4,10	5,00	5,20	6,80	6,80	8,00	9,00
Input power	Nominal	kW	0,72	0,90	1,18	1,09	1,86	1,55	1,98	2,20
	Min		0,25	0,25	0,25	0,36	0,27	0,34	0,53	0,55
	Max		1,10	1,37	1,49	2,18	2,37	2,47	2,87	3,86
Annual energy consumption ³⁾		kWh/a	144	169	206	214	298	298	990	1100
Heating capacity	Nominal	kW	4,20	4,60	5,60	6,80	8,50	8,50	9,40	10,40
	Min		1,10	1,10	1,10	1,60	3,30	3,00	4,20	3,40
	Max		5,60	7,00	7,20	8,30	10,40	10,60	10,60	14,50
Heating capacity at -7 °C		kW	3,39	4,18	4,28	3,95	4,45	4,45	6,42	8,62
COP ¹⁾	Nominal	W/W	4,88	4,79	4,63	4,63	3,95	4,47	4,63	4,84
	Min		5,24	5,24	5,24	5,00	5,32	5,17	6,00	6,42
	Max		4,18	3,91	4,00	3,82	3,64	3,96	3,46	3,42
SCOP ²⁾			4,60 A++	4,60 A++	4,60 A++	4,20 A+	4,20 A+	4,20 A+	4,70 A++	4,68 A++
Pdesign at -10 °C		kW	3,20	3,50	4,20	5,00	5,20	5,80	6,80	8,50
Input power	Nominal	kW	0,86	0,96	1,21	1,47	2,15	1,90	2,03	2,15
	Min		0,21	0,21	0,21	0,32	0,62	0,58	0,70	0,53
	Max		1,34	1,79	1,80	2,17	2,86	2,68	3,06	4,24
Annual energy consumption ³⁾		kWh/a	974	1065	1278	1667	1733	1933	2026	2543
Current	Cool / Heat	A	3,35/4,00	4,15/4,45	5,35/5,50	5,00/6,70	8,40/9,70	7,00/8,60	9,50/9,50	10,50/10,10
Power supply		V	230	230	230	230	230	230	230	230
Recommended fuse		A	16	16	16	16	16	20	20	25
Recommended power cable section		mm ²	2,5	2,5	2,5	2,5	2,5	2,5	2,5	4,0
Sound pressure ⁴⁾	Cool / Heat (Hi)	dB(A)	48/50	48/50	50/52	47/48	51/52	49/50	51/52	53/54
Dimension ⁵⁾	H x W x D	mm	619x824x299	619x824x299	619x824x299	795x875x320	795x875x320	795x875x320	999x940x340	999x940x340
Net weight		kg	39	39	39	71	71	72	80	81
Piping diameter	Liquid	Inch (mm)	1/4 {6,35}	1/4 {6,35}	1/4 {6,35}	1/4 {6,35}	1/4 {6,35}	1/4 {6,35}	1/4 {6,35}	1/4 {6,35}
	Gas	Inch (mm)	3/8 {9,52}	3/8 {9,52}	3/8 {9,52}	3/8 {9,52}	3/8 {9,52}	3/8 {9,52}	3/8 {9,52}	3/8 {9,52}
Pipe length range total ⁶⁾		m	6 ~ 30	6 ~ 30	6 ~ 30	6 ~ 50	6 ~ 60	6 ~ 60	6 ~ 70	6 ~ 80
Pipe length range to one unit		m	3 ~ 20	3 ~ 20	3 ~ 20	3 ~ 25	3 ~ 25	3 ~ 25	3 ~ 25	3 ~ 25
Elevation difference (in / out)		m	10	10	10	15	15	15	15	15
Pre-charged pipe length		m	20	20	20	30	30	30	45	45
Additional gas amount		g/m	15	15	15	20	20	20	20	20
Refrigerant (R32) / CO ₂ Eq.		kg / T	1,12/0,756	1,12/0,756	1,12/0,756	2,10/1,418	2,10/1,418	2,10/1,418	2,72/1,836	2,72/1,836
Operating range	Heat Min ~ Max	°C	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46
	Cool Min ~ Max	°C	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24

1) EER and COP calculation is based in accordance to EN 14511, 2) Energy Label Scale from A+++ to D, 3) The annual energy consumption is calculated in accordance to EU/626/2011, 4) The sound pressure of the units shows the value measured of a position 1 m in front and 1 m in rear side of the main body. The sound pressure is measured in accordance with JIS C 9612, 5) Add 70 or 95 mm for piping port.

6) Minimum piping length is 3 meters per indoor unit.

Possible outdoor / indoor units combinations

Rooms	Outdoor unit	Indoor capacity connected (Min - Max)	Wall-mounted Etherea							Wall-mounted TZ super-compact							Floor console				4 way 60x60 cassette					Low static pressure hide-away				
			16	20	25	35	42	50	71	16	20	25	35	42	50	60	71	20	25	35	50	20	25	35	50	60	20	25	35	50
2	CU-2Z35TBE	3,2 ~ 6,0 kW	•	•	•	•			•	•	•	•					•	•	•		• ¹⁾	• ¹⁾	• ¹⁾			•	•	•		
	CU-2Z41TBE	3,2 ~ 6,0 kW	•	•	•	•			•	•	•	•					•	•	•		• ¹⁾	• ¹⁾	• ¹⁾			•	•	•		
	CU-2Z50TBE	3,2 ~ 7,7 kW	•	•	•	•	• ¹⁾	• ¹⁾	•	•	•	•	• ¹⁾	• ¹⁾			•	•	•	• ¹⁾	• ¹⁾	• ¹⁾	• ¹⁾	• ¹⁾		•	•	•	• ¹⁾	
3	CU-3Z52TBE	4,5 ~ 9,5 kW	•	•	•	•	• ¹⁾	• ¹⁾		•	•	•	•	• ¹⁾	• ¹⁾						• ¹⁾	• ¹⁾	• ¹⁾	• ¹⁾		•	•	•	• ¹⁾	
	CU-3Z68TBE	4,5 ~ 11,2 kW	•	•	•	•	• ¹⁾	• ¹⁾		•	•	•	•	• ¹⁾	• ¹⁾	• ¹⁾					• ¹⁾	• ¹⁾	• ¹⁾	• ¹⁾	• ²⁾	•	•	•	• ¹⁾	• ¹⁾
4	CU-4Z68TBE	4,5 ~ 11,5 kW	•	•	•	•	• ¹⁾	• ¹⁾		•	•	•	•	• ¹⁾	• ¹⁾	• ¹⁾					• ¹⁾	• ¹⁾	• ¹⁾	• ¹⁾	• ²⁾	•	•	•	• ¹⁾	• ¹⁾
	CU-4Z80TBE	4,5 ~ 14,7 kW	•	•	•	•	• ¹⁾	• ¹⁾	• ³⁾	•	•	•	•	• ¹⁾	• ¹⁾	• ¹⁾	• ³⁾				• ¹⁾	• ¹⁾	• ¹⁾	• ¹⁾	• ²⁾	•	•	•	• ¹⁾	• ¹⁾
5	CU-5Z90TBE	4,5 ~ 18,3 kW	•	•	•	•	• ¹⁾	• ¹⁾	• ³⁾	•	•	•	•	• ¹⁾	• ¹⁾	• ¹⁾	• ³⁾				• ¹⁾	• ¹⁾	• ¹⁾	• ¹⁾	• ²⁾	•	•	•	• ¹⁾	• ¹⁾

1) Pipe reducer CZ-MA1PA required. 2) Pipe reducer CZ-MA2PA required. 3) Pipe reducers CZ-MA2PA and CZ-MA3PA required.

R32

REFRIGERANT



INVERTER+



R2 ROTARY COMPRESSOR



HEATING MODE



R32 R410A R32 / R410A RENEWAL




Optional wired remote controller.
CZ-RD517C

INTERNET CONTROL: Built-in Wi-Fi.



Wall-mounted Etherea	Indoor unit graphite grey	Indoor unit silver	Indoor unit matt white	Cooling capacity	Heating capacity	Connection in. / out.	Sound pressure ¹⁾		Dimension / Net weight	Piping diameter
				kW	kW		Cool — Heat (Hi/Lo/Q-Lo)	dB(A)		
1,6 kW	—	—	CS-MZ16ZKE	1,60	2,60	4x1,5	38/26/21 — 39/27/21		295x870x229/10	1/4 (6,35)/3/8 (9,52)
2,0 kW	CS-XZ20ZKEW-H	CS-XZ20ZKEW	CS-Z20ZKEW	2,00	3,20	4x1,5	39/26/21 — 40/27/21		295x870x229/10	1/4 (6,35)/3/8 (9,52)
2,5 kW	CS-XZ25ZKEW-H	CS-XZ25ZKEW	CS-Z25ZKEW	2,50	3,60	4x1,5	41/27/21 — 43/29/21		295x870x229/10	1/4 (6,35)/3/8 (9,52)
3,5 kW ²⁾	CS-XZ35ZKEW-H	CS-XZ35ZKEW	CS-Z35ZKEW	3,50	4,50	4x1,5	44/30/21 — 45/35/21		295x870x229/11	1/4 (6,35)/3/8 (9,52)
4,2 kW ³⁾	CS-XZ42ZKEW-H	—	CS-Z42ZKEW	4,20	5,60	4x1,5	44/33/27 — 45/37/31		295x870x229/10	1/4 (6,35)/1/2 (12,70)
5,0 kW ⁴⁾	—	CS-XZ50ZKEW	CS-Z50ZKEW	5,00	6,80	4x2,5	44/39/32 — 46/39/32		295x1040x244/12	1/4 (6,35)/1/2 (12,70)
7,1 kW	—	—	CS-Z71ZKEW	7,10	8,70	4x2,5	49/40/32 — 49/40/32		295x1040x244/13	1/4 (6,35)/5/8 (15,88)



Optional wired remote controller.
CZ-RD517C

INTERNET CONTROL: Built-in Wi-Fi.



Wall-mounted TZ super-compact	Indoor unit	Cooling capacity	Heating capacity	Connection in. / out.	Sound pressure ¹⁾		Dimension / Net weight	Piping diameter
		kW	kW		Cool — Heat (Hi/Lo/Q-Lo)	dB(A)		
1,6 kW	CS-MTZ16ZKE	1,60	2,60	4x1,5	38/27/22 — 39/28/24		290x779x209/8	1/4 (6,35)/3/8 (9,52)
2,0 kW	CS-TZ20ZKEW	2,00	3,20	4x1,5	37/25/20 — 38/26/22		290x779x209/8	1/4 (6,35)/3/8 (9,52)
2,5 kW	CS-TZ25ZKEW	2,50	3,60	4x1,5	40/26/20 — 40/27/22		290x779x209/8	1/4 (6,35)/3/8 (9,52)
3,5 kW ²⁾	CS-TZ35ZKEW	3,50	4,50	4x1,5	42/30/20 — 42/33/22		290x779x209/8	1/4 (6,35)/3/8 (9,52)
4,2 kW	CS-TZ42ZKEW	4,20	5,60	4x1,5	44/31/29 — 44/35/34		290x779x209/8	1/4 (6,35)/1/2 (12,70)
5,0 kW	CS-TZ50ZKEW	5,00	6,80	4x2,5	44/37/33 — 44/37/33		290x779x209/8	1/4 (6,35)/1/2 (12,70)
6,0 kW	CS-TZ60ZKEW	6,00	8,50	4x2,5	45/37/34 — 45/37/34		295x1040x244/12	1/4 (6,35)/1/2 (12,70)
7,1 kW	CS-TZ71ZKEW	7,10	8,70	4x2,5	47/38/35 — 47/38/35		295x1040x244/13	1/4 (6,35)/5/8 (15,88)




Optional wired remote controller.
CZ-RD517C

INTERNET CONTROL: Optional.



Floor console ⁵⁾	Indoor unit	Cooling capacity	Heating capacity	Connection in. / out.	Sound pressure ⁶⁾		Dimension / Net weight	Piping diameter
		kW	kW		Cool — Heat (Hi/Lo/Q-Lo)	dB(A)		
2,0 kW	CS-MZ20UFEA	2,00	3,20	4x1,5	39/27/22 — 39/27/21		600x750x207/13	1/4 (6,35)/3/8 (9,52)
2,5 kW	CS-Z25UFEAW	2,50	3,60	4x1,5	40/27/22 — 40/27/21		600x750x207/13	1/4 (6,35)/3/8 (9,52)
3,5 kW ²⁾	CS-Z35UFEAW	3,50	4,50	4x1,5	41/28/22 — 41/28/21		600x750x207/13	1/4 (6,35)/3/8 (9,52)
5,0 kW	CS-Z50UFEAW	5,00	5,30	4x1,5	44/33/29 — 48/35/31		600x750x207/13	1/4 (6,35)/1/2 (12,70)



Optional wired remote controller.
CZ-RT66W or CZ-RTC6

Panel (sold separately).
CZ-KPY4

INTERNET CONTROL and BMS CONNECTIVITY: Optional.



4 way 60x60 cassette*	Indoor unit (Panel CZ-KPY4)	Cooling capacity	Heating capacity	Connection in. / out.	Sound pressure ⁷⁾		Dimension / Net weight		Piping diameter
		kW	kW		Cool — Heat (Hi/Lo/Q-Lo)	dB(A)	Indoor HxWxD	Panel HxWxD	
2,0 kW	S-M20PY3E	2,00	3,20	4x1,5	33/30/27 — 33/30/27		243x575x575/15	30x625x625/2,8	1/4 (6,35)/1/2 (12,70)
2,5 kW	S-25PY3E	2,50	3,60	4x1,5	33/30/27 — 33/30/27		243x575x575/15	30x625x625/2,8	1/4 (6,35)/1/2 (12,70)
3,5 kW ²⁾	S-36PY3E	3,50	3,60	4x1,5	36/32/27 — 36/32/27		243x575x575/15	30x625x625/2,8	1/4 (6,35)/1/2 (12,70)
5,0 kW ⁴⁾	S-50PY3E	5,00	6,80	4x1,5	41/36/29 — 41/36/29		243x575x575/15	30x625x625/2,8	1/4 (6,35)/1/2 (12,70)
6,0 kW	S-60PY3E	6,00	8,50	4x1,5	45/39/33 — 45/39/33		243x575x575/15	30x625x625/2,8	3/8 (9,52)/5/8 (15,88)

* Compatible with Commercial control and connectivity accessories only. For detailed information go to the control systems section.



Optional wireless control kit.
CZ-RL511D

INTERNET CONTROL and BMS CONNECTIVITY: Optional.



Low static pressure hide-away	Indoor unit	Cooling capacity	Heating capacity	Connection in. / out.	Sound pressure ⁸⁾		Dimension / Net weight	Piping diameter
		kW	kW		Cool — Heat (Hi/Lo/Q-Lo)	dB(A)		
2,0 kW	CS-MZ20UD3EA	2,00	3,20	4x1,5	34/29/26 — 36/29/26		200x750x640/19	1/4 (6,35)/3/8 (9,52)
2,5 kW	CS-Z25UD3EAW	2,50	3,60	4x1,5	35/29/26 — 37/29/26		200x750x640/19	1/4 (6,35)/3/8 (9,52)
3,5 kW ²⁾	CS-Z35UD3EAW	3,50	4,50	4x1,5	35/29/26 — 37/29/26		200x750x640/19	1/4 (6,35)/3/8 (9,52)
5,0 kW ⁴⁾	CS-Z50UD3EAW	5,00	6,80	4x1,5	41/31/28 — 41/32/29		200x750x640/19	1/4 (6,35)/1/2 (12,70)
6,0 kW	CS-Z60UD3EAW	6,00	8,50	4x1,5	43/32/29 — 43/34/31		200x750x640/19	1/4 (6,35)/1/2 (12,70)

1) The sound pressure of the indoor unit shows the value measured of a position of 1 m in front of the main body and 0,8 m below the unit. The sound pressure is measured in accordance with JIS C 9612. Q-Lo: Quiet mode. Lo: The lowest set fan speed. 2) Heating capacity in combination with Free Multi outdoor units except with CU-Z235TBE. In this case, the heating capacity is 4,20 kW. 3) Heating capacity in combination with Free Multi outdoor units except with CU-Z250TBE. In this case, the heating capacity is 5,00 kW. 4) Heating capacity in combination with Free Multi outdoor units except with CU-Z235TBE. In this case, the heating capacity is 5,30 kW. 5) Compatible only with 2 ports R32 outdoor CU-Z235TBE / CU-Z241TBE / CU-Z250TBE. Minimum quantity of connection: 2 indoor units. 6) The sound pressure of the units shows the value measured of a position 1 m in front of the main body and 1 m above floor. The sound pressure is measured in accordance with JIS C 9612. Q-Lo: Quiet mode. Lo: The lowest set fan speed. 7) The sound pressure of the indoor unit shows the value measured of a position of 1,5 m below the unit. The sound pressure is measured in accordance with JIS C 9612. Q-Lo: Quiet mode. Lo: The lowest set fan speed. 8) The sound pressure of the indoor unit shows the value measured of a position of 1,5 m below the unit with 1 m duct on the suction side and 2 m duct on the discharge side. The sound pressure is measured in accordance with JIS C 9612.

Multi wall TZ system

Outdoor units Multi wall TZ system - R32

- Up to 3 indoor units with a single outdoor unit
- Up to 3 rooms with individual control
- High energy efficiency class A++ SEER
- Flexible installation, compact units and large connection distance
- Indoor units compatible with internet and voice control



Outdoor unit			CU-2TZ41TBE	CU-2TZ50TBE	CU-3TZ52TBE
Indoor nominal capacity (Min - Max)			3,2 ~ 6,0 kW	3,2 ~ 7,7 kW	4,5 ~ 9,5 kW
Cooling capacity	Nominal (Min - Max)	kW	4,10 [1,50 - 4,70]	5,00 [1,50 - 5,40]	5,20 [1,80 - 6,60]
EER ¹⁾	Nominal (Min - Max)	W/W	4,14 [5,56 - 3,41]	3,85 [5,56 - 3,33]	4,52 [3,67 - 5,00]
SEER ²⁾			7,10 A++	7,00 A++	7,60 A++
Pdesign (cooling)		kW	4,10	5,00	5,20
Input power	Nominal (Min - Max)	kW	0,99 [0,27 - 1,38]	1,30 [0,27 - 1,62]	1,15 [0,36 - 1,80]
Annual energy consumption ³⁾		kWh/a	202	250	239
Heating capacity	Nominal (Min - Max)	kW	4,40 [1,10 - 6,30]	5,70 [1,10 - 6,40]	6,80 [1,60 - 7,50]
Heating capacity at -7 °C		kW	3,75	3,80	—
COP ¹⁾	Nominal (Min - Max)	W/W	4,44 [5,00 - 3,54]	4,35 [5,00 - 3,62]	4,28 [3,87 - 5,00]
SCOP ²⁾			4,30 A+	4,20 A+	4,20 A+
Pdesign at -10 °C		kW	3,50	4,50	5,00
Input power	Nominal (Min - Max)	kW	0,99 [0,22 - 1,78]	1,31 [0,22 - 1,77]	1,59 [0,32 - 1,94]
Annual energy consumption ³⁾		kWh/a	1139	1500	1667
Current	Cool / Heat	A	4,60 / 4,60	6,00 / 6,00	5,30 / 7,30
Power supply		V	230	230	230
Sound pressure ⁴⁾	Cool / Heat (Hi)	dB(A)	48 / 50	50 / 52	48 / 48
Dimension ⁵⁾	H x W x D	mm	542 x 780 x 289	542 x 780 x 289	795 x 875 x 320
Net weight		kg	35	35	71
Piping diameter	Liquid	Inch (mm)	1/4 (6,35)	1/4 (6,35)	1/4 (6,35)
	Gas	Inch (mm)	3/8 (9,52)	3/8 (9,52)	3/8 (9,52)
Pipe length range total		m	6 ~ 30	6 ~ 30	6 ~ 50
Pipe length range to one unit		m	3 ~ 20	3 ~ 20	3 ~ 25
Elevation difference (in / out)		m	10	10	15
Pre-charged pipe length		m	20	20	30
Additional gas amount		g/m	15	15	20
Refrigerant (R32) / CO ₂ Eq.		kg / T	0,9 / 0,6075	0,9 / 0,6075	2,1 / 1,4175
Operating range	Cool Min ~ Max	°C	-10 ~ +46	-10 ~ +46	-10 ~ +46
	Heat Min ~ Max	°C	-15 ~ +24	-15 ~ +24	-15 ~ +24

1) EER and COP calculation is based in accordance to EN 14511. 2) Energy Label Scale from A+++ to D. 3) The annual energy consumption is calculated in accordance to EU/626/2011. 4) The sound pressure of the units shows the value measured of a position 1 m in front and 1 m in rear side of the main body. The sound pressure is measured in accordance with JIS C 9612. 5) Add 70 or 95 mm for piping port.



Possible outdoor / indoor units combinations

Rooms	Outdoor unit	Indoor capacity connected (Min - Max)	Wall-mounted TZ super-compact					
			16	20	25	35	42	50
2	CU-2TZ41TBE	3,2 ~ 6,0 kW	•	•	•	•		
	CU-2TZ50TBE	3,2 ~ 7,7 kW	•	•	•	•	•	•
3	CU-3TZ52TBE	4,5 ~ 9,5 kW	•	•	•	•	•	•

Minimum quantity of connection: 2 indoor units.



Optional wired remote controller.
CZ-RD517C

INTERNET CONTROL: Built-in Wi-Fi.



Wall-mounted TZ super-compact	Indoor unit	Cooling capacity	Heating capacity	Connection in. / out.	Sound pressure ¹⁾	Dimension / Net weight	Piping diameter	
					Cool — Heat (Hi/Lø/Q-Lo)			Liquid / Gas
					dB[A]			Inch [mm]
1,6 kW	CS-MTZ16ZKE	1,60	2,60	4x1,5	38/27/22 — 39/28/24	290 x 779 x 209/8	1/4 [6,35] / 3/8 [9,52]	
2,0 kW	CS-TZ20ZKEW	2,00	3,20	4x1,5	37/25/20 — 38/26/22	290 x 779 x 209/8	1/4 [6,35] / 3/8 [9,52]	
2,5 kW	CS-TZ25ZKEW	2,50	3,60	4x1,5	40/26/20 — 40/27/22	290 x 779 x 209/8	1/4 [6,35] / 3/8 [9,52]	
3,5 kW	CS-TZ35ZKEW	3,50	4,50	4x1,5	42/30/20 — 42/33/22	290 x 779 x 209/8	1/4 [6,35] / 3/8 [9,52]	
4,2 kW	CS-TZ42ZKEW	4,20	5,60	4x1,5	44/31/29 — 44/35/34	290 x 779 x 209/8	1/4 [6,35] / 1/2 [12,70]	
5,0 kW	CS-TZ50ZKEW	5,00	6,80	4x2,5	44/37/33 — 44/37/33	290 x 779 x 209/8	1/4 [6,35] / 1/2 [12,70]	

1) The sound pressure of the indoor unit shows the value measured of a position of 1 m in front of the main body and 0,8 m below the unit. The sound pressure is measured in accordance with JIS C 9612. Q-Lo: Quiet mode. Lo: The lowest set fan speed.

Rating conditions: Cooling indoor 27 °C DB / 19 °C WB, Cooling outdoor 35 °C DB / 24 °C WB, Heating indoor 20 °C DB, Heating outdoor 7 °C DB / 6 °C WB, (DB: Dry Bulb; WB: Wet Bulb). Specifications subject to change without notice. For detailed information about ErP / Energy Labelling, please visit our websites www.aircon.panasonic.eu or www.ptc.panasonic.eu.