



Water Underfloor Heating | Pipe


Multilayer Pert-Al-Pert UFH Pipe



- PERT - Raised Temperature Polyethylene
- Bonding Layer - Adhesive
- Aluminium
- Bonding Layer - Adhesive
- PERT - Raised Temperature Polyethylene

Suitable for use in water underfloor heating and potable water applications, as Pert-Al-Pert pipe is WRAS Approved.

High mechanical strength and durability but easy to cut, bend and install.

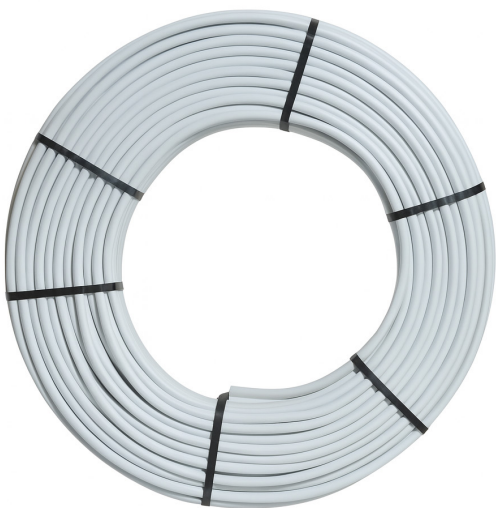

Pert-Al-Pert pipes feature a multi-layer construction with an ultrasonically welded aluminium core. Additional inner and outer layers of PERT II plastic are bonded to the aluminium, resulting in a durable composite pipe capable of operating reliably under combined conditions of 10 bar pressure and temperatures up to 95°C.

Specifications

Product Code	Length	Warranty	Max. Temperature	Max. Pressure	External Diameter	Internal Diameter	Max. Pipe Length
OF-0018 OF-0073 OF-0021	100m 200m 500m	50 Years Warranty (T's & C's Apply)	Up to 95°C	Up to 10 bar	16mm	12mm	110m per loop