

Air Conditioning Technical Data

RXA-B8



TABLE OF CONTENTS

RXA-B8

1	Features	4
	RXA-B8	4
2	Specifications	5
3	Electrical data	31
4	Capacity tables	32
	Cooling/Heating Capacity Tables	32
5	Dimensional drawings	33
6	Centre of gravity	34
7	Piping diagrams	35
8	Wiring diagrams	36
	Wiring Diagrams - Single Phase	36
9	Sound data	37
	Sound Pressure Spectrum	37
10	Operation range	38

1 Features

1 - 1 RXA-B8

- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Outdoor units are fitted with a swing compressor, renowned for its low noise and high energy efficiency
- › Outdoor units for pair application



Outdoor
unit silent
operation

2 Specifications

2 - 1 Specifications

Technical specifications				FTXA42BB + RXA42B8		FTXA50BB + RXA50B8	
Cooling capacity	Min.		kW			1.7	
	Min.		Btu/h			5,800	
	Min.		kcal/h			1,462	
	Nom.		kW	4.2		5	
	Nom.		Btu/h	14,300		17,100	
	Nom.		kcal/h	3,611		4,299	
	Max.		kW	5		5.3	
	Max.		Btu/h	17,100		18,100	
	Max.		kcal/h	4,299		4,557	
Heating capacity	Min.		kW			1.7	
	Min.		Btu/h			5,800	
	Min.		kcal/h			1,462	
	Nom.		kW	5.4		5.8	
	Nom.		Btu/h	18,400		19,800	
	Nom.		kcal/h	4,643		4,987	
	Max.		kW	6		6.5	
	Max.		Btu/h	20,500		22,200	
	Max.		kcal/h	5,159		5,589	
Power input	Cooling	Nom.	kW	1.05		1.36	
	Heating	Nom.	kW	1.31		1.45	
Nominal efficiency	EER			3.99		3.68	
	COP			4.12		4	
	Annual energy consumption		kWh	526		679	
	Energy labeling Directive	Cooling				A	
	Heating				A		
Space cooling	Energy efficiency class					A++	
	Capacity	Pdesign	kW	4.2		5	
	SEER			7.5		7.33	
	Annual energy consumption		kWh/a	196		239	
Space heating (Average climate)	Capacity	Pdesign	kW	3.8		4	
	Energy efficiency class					A++	
	SCOP/A					4.6	
	SCOPnet/A					4.65	
	Pdh Heating capacity at -10°		kW	3.04		3.19	
	Annual energy consumption		kWh/a	1,156		1,218	
	Required back up heating cap at design conditions		kW	0.76		0.81	
Space heating (Warm climate)	Capacity	Pdesign	kW	2.05		2.16	
	Energy efficiency class					A+++	
	SCOP			5.87		5.86	
	SCOPnet			5.99		5.97	
	Annual energy consumption		kWh/a	489		516	
	Required back up heating cap at design conditions		kW			0	
Space cooling	A Condition	Pdc	kW	4.2		5	
	(35°C - 27/19)	EERd		3.99		3.68	
		Power input	kW	1.05		1.36	
	B Condition	Pdc	kW	3.1		3.69	
	(30°C - 27/19)	EERd		5.58		5.28	
		Power input	kW	0.56		0.7	
	C Condition	Pdc	kW	1.99		2.37	
	(25°C - 27/19)	EERd		9.35		9.24	
		Power input	kW	0.21		0.26	
	D Condition	Pdc	kW	1.86		1.87	
	(20°C - 27/19)	EERd		12.08		12.03	
		Power input	kW	0.15		0.16	

2 Specifications

2 - 1 Specifications

2

Technical specifications				FTXA42BB + RXA42B8	FTXA50BB + RXA50B8	
Space heating (Average climate)	TOL	Tol (temperature operating limit)		°C	-10	
	TBivalent	Tbiv (bivalent temperature)		°C	-7	
		Pdh (declared heating cap)		kW	3.37	3.54
		COPd (declared COP)			3.16	
		Power input		kW	1.07	1.12
	A Condition (-7°C)	Pdh (declared heating cap)		kW	3.37	3.54
		COPd (declared COP)			3.16	
		Power input		kW	1.07	1.12
	B Condition (2°C)	Pdh (declared heating cap)		kW	2.05	2.16
		COPd (declared COP)			4.47	4.46
		Power input		kW	0.46	0.48
	C Condition (7°C)	Pdh (declared heating cap)		kW	1.65	1.71
		COPd (declared COP)			6.33	6.32
		Power input		kW	0.26	0.27
	D Condition (12°C)	Pdh (declared heating cap)		kW		1.52
COPd (declared COP)			7.35	7.25		
Power input		kW		0.21		
E condition (-10°C)	Pdh (declared heating cap)		kW	3.04	3.19	
	COPd (declared COP)			2.98		
Space heating (Average climate)	E condition (-10°C)	Power input		kW	1.02	1.07
Space heating (Warm climate)	TOL	Tol (temperature operating limit)		°C	2	
	TBivalent	Tbiv (bivalent temperature)		°C	2	
		Pdh (declared heating cap)		kW	2.05	2.16
		COPd (declared COP)			4.47	4.46
		Power input		kW	0.46	0.48
	B Condition (2°C)	Pdh (declared heating cap)		kW	2.05	2.16
		COPd (declared COP)			4.47	4.46
		Power input		kW	0.46	0.48
	C Condition (7°C)	Pdh (declared heating cap)		kW	1.65	1.71
		COPd (declared COP)			6.33	6.32
		Power input		kW	0.26	0.27
	D Condition (12°C)	Pdh (declared heating cap)		kW		1.52
		COPd (declared COP)			7.35	7.25
		Power input		kW		0.21
	E condition (2°C)	Pdh (declared heating cap)		kW	2.05	2.16
COPd (declared COP)			4.47	4.46		
Power input		kW	0.46	0.48		
Power consumption in other than active mode	Crankcase heater mode	PCK		W	0	
	Off mode	POFF		W	1	
	Standby mode	Cooling	PSB		W	1
		Heating	PSB		W	1
	Thermo-stat-off mode	PTO	Cooling	W		12
Heating			W		13	
Cooling	Cdc (Degradation cooling)			0.25		
Heating	Cdh (Degradation heating)			0.25		
Cooling function included					Yes	
Heating function included					Yes	
Average climate included					Yes	
Cold season included					No	
Warm season included					Yes	
Eurovent	Sound power level outdoor	Cooling	Nom.	dB(A)	62	
		Heating	Nom.	dB(A)	60	
	Piping length	Cooling	Measuring condition		m	5
Voltage range	Min.				%	-10
	Max.				%	10
Electrical specifications				FTXA42BB + RXA42B8	FTXA50BB + RXA50B8	
Power factor	Nominal	Cooling	%	93.4	95.3	
		Heating	%	95.5	96.5	
Current - 50Hz	Maximum fuse amps (MFA)		A	13		
	Minimum circuit amps (MCA)		A	12.84		
Power supply	Frequency		Hz	50		
	Voltage		V	220-240		

2 Specifications

2 - 1 Specifications

Electrical specifications			FTXA42B8 + RXA42B8	FTXA50B8 + RXA50B8
Voltage range	Max.	%		10
	Min.	%		-10

(1)Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. |

(2)Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. |

(3)See separate drawing for operation range

Technical specifications				FTXA42B8 + RXA42B8	FTXA50B8 + RXA50B8	
Cooling capacity	Min.		kW		1.7	
	Min.		Btu/h		5,800	
	Min.		kcal/h		1,462	
	Nom.		kW	4.2	5	
	Nom.		Btu/h	14,300	17,100	
	Nom.		kcal/h	3,611	4,299	
	Max.		kW	5	5.3	
	Max.		Btu/h	17,100	18,100	
	Max.		kcal/h	4,299	4,557	
Heating capacity	Min.		kW		1.7	
	Min.		Btu/h		5,800	
	Min.		kcal/h		1,462	
	Nom.		kW	5.4	5.8	
	Nom.		Btu/h	18,400	19,800	
	Nom.		kcal/h	4,643	4,987	
	Max.		kW	6	6.5	
	Max.		Btu/h	20,500	22,200	
	Max.		kcal/h	5,159	5,589	
Power input	Cooling	Nom.	kW	1.05	1.36	
	Heating	Nom.	kW	1.31	1.45	
Nominal efficiency	EER			3.99	3.68	
	COP			4.12	4	
	Annual energy consumption		kWh	526	679	
	Energy labeling Directive	Cooling			A	
	Heating			A		
Space cooling	Energy efficiency class				A++	
	Capacity	Pdesign	kW	4.2	5	
	SEER			7.5	7.33	
	Annual energy consumption		kWh/a	196	239	
Space heating (Average climate)	Capacity	Pdesign	kW	3.8	4	
	Energy efficiency class				A++	
	SCOP/A				4.6	
	SCOPnet/A				4.65	
	Pdh Heating capacity at -10°		kW	3.04	3.19	
	Annual energy consumption		kWh/a	1,156	1,218	
	Required back up heating cap at design conditions		kW	0.76	0.81	
	Capacity	Pdesign	kW	2.05	2.16	
Space heating (Warm climate)	Energy efficiency class				A+++	
	SCOP			5.87	5.86	
	SCOPnet			5.99	5.97	
	Annual energy consumption		kWh/a	489	516	
	Required back up heating cap at design conditions		kW		0	
	Space cooling	A Condition	Pdc	kW	4.2	5
		(35°C - 27/19)	EERd		3.99	3.68
			Power input	kW	1.05	1.36
B Condition		Pdc	kW	3.1	3.69	
(30°C - 27/19)		EERd		5.58	5.28	
		Power input	kW	0.56	0.7	
C Condition		Pdc	kW	1.99	2.37	
(25°C - 27/19)		EERd		9.35	9.24	
		Power input	kW	0.21	0.26	
D Condition		Pdc	kW	1.86	1.87	
(20°C - 27/19)		EERd		12.08	12.03	
		Power input	kW	0.15	0.16	

2 Specifications

2 - 1 Specifications

2

Technical specifications				FTXA42BS + RXA42B8	FTXA50BS + RXA50B8	
Space heating (Average climate)	TOL	Tol (temperature operating limit)		°C	-10	
	TBivalent	Tbiv (bivalent temperature)		°C	-7	
		Pdh (declared heating cap)		kW	3.37	3.54
		COPd (declared COP)			3.16	
	A Condition (-7°C)	Power input		kW	1.07	1.12
		Pdh (declared heating cap)		kW	3.37	3.54
		COPd (declared COP)			3.16	
	B Condition (2°C)	Power input		kW	1.07	1.12
		Pdh (declared heating cap)		kW	2.05	2.16
		COPd (declared COP)			4.47	4.46
	C Condition (7°C)	Power input		kW	0.46	0.48
		Pdh (declared heating cap)		kW	1.65	1.71
		COPd (declared COP)			6.33	6.32
	D Condition (12°C)	Power input		kW	0.26	0.27
		Pdh (declared heating cap)		kW		1.52
COPd (declared COP)			7.35	7.25		
E condition (-10°C)	Power input		kW	0.21		
	Pdh (declared heating cap)		kW	3.04	3.19	
Space heating (Average climate)	COPd (declared COP)			2.98		
	Power input		kW	1.02	1.07	
Space heating (Warm climate)	TOL	Tol (temperature operating limit)		°C	2	
	TBivalent	Tbiv (bivalent temperature)		°C	2	
		Pdh (declared heating cap)		kW	2.05	2.16
		COPd (declared COP)			4.47	4.46
	B Condition (2°C)	Power input		kW	0.46	0.48
		Pdh (declared heating cap)		kW	2.05	2.16
		COPd (declared COP)			4.47	4.46
	C Condition (7°C)	Power input		kW	0.46	0.48
		Pdh (declared heating cap)		kW	1.65	1.71
		COPd (declared COP)			6.33	6.32
	D Condition (12°C)	Power input		kW	0.26	0.27
		Pdh (declared heating cap)		kW		1.52
		COPd (declared COP)			7.35	7.25
	E condition (2°C)	Power input		kW	0.21	
		Pdh (declared heating cap)		kW	2.05	2.16
	COPd (declared COP)			4.47	4.46	
	Power input		kW	0.46	0.48	
Power consumption in other than active mode	Crankcase heater mode		W		0	
	Off mode		POFF	W	1	
	Standby mode	Cooling		PSB	W	1
		Heating		PSB	W	1
	Thermo-stat-off mode	PTO		Cooling	W	12
		Heating	W	13		
Cooling	Cdc (Degradation cooling)				0.25	
Heating	Cdh (Degradation heating)				0.25	
Cooling function included					Yes	
Heating function included					Yes	
Average climate included					Yes	
Cold season included					No	
Warm season included					Yes	
Eurovent	Sound power level outdoor	Cooling	Nom.	dB(A)	62	
		Heating	Nom.	dB(A)	60	
	Piping length	Cooling	Measuring condition	m	5	
Voltage range	Min.			%	-10	
	Max.			%	10	
Electrical specifications				FTXA42BS + RXA42B8	FTXA50BS + RXA50B8	
Power factor	Nominal		Cooling	%	93.4	95.3
			Heating	%	95.5	96.5
Current - 50Hz	Maximum fuse amps (MFA)			A	13	
	Minimum circuit amps (MCA)			A	12.84	
Power supply	Frequency			Hz	50	
	Voltage			V	220-240	

2 Specifications

2 - 1 Specifications

Electrical specifications			FTXA42BS + RXA42B8	FTXA50BS + RXA50B8
Voltage range	Max.	%		10
	Min.	%		-10

(1)Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. |

(2)Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. |

(3)See separate drawing for operation range

Technical specifications				FTXA42BT + RXA42B8	FTXA50BT + RXA50B8
Cooling capacity	Min.		kW		1.7
	Min.		Btu/h		5,800
	Min.		kcal/h		1,462
	Nom.		kW	4.2	5
	Nom.		Btu/h	14,300	17,100
	Nom.		kcal/h	3,611	4,299
	Max.		kW	5	5.3
	Max.		Btu/h	17,100	18,100
	Max.		kcal/h	4,299	4,557
Heating capacity	Min.		kW		1.7
	Min.		Btu/h		5,800
	Min.		kcal/h		1,462
	Nom.		kW	5.4	5.8
	Nom.		Btu/h	18,400	19,800
	Nom.		kcal/h	4,643	4,987
	Max.		kW	6	6.5
	Max.		Btu/h	20,500	22,200
	Max.		kcal/h	5,159	5,589
Power input	Cooling	Nom.	kW	1.05	1.36
	Heating	Nom.	kW	1.31	1.45
Nominal efficiency	EER			3.99	3.68
	COP			4.12	4
	Annual energy consumption		kWh	526	679
	Energy labeling Directive	Cooling			A
	Heating			A	
Space cooling	Energy efficiency class				A++
	Capacity	Pdesign	kW	4.2	5
	SEER			7.5	7.33
	Annual energy consumption		kWh/a	196	239
Space heating (Average climate)	Capacity	Pdesign	kW	3.8	4
	Energy efficiency class				A++
	SCOP/A				4.6
	SCOPnet/A				4.65
	Pdh Heating capacity at -10°		kW	3.04	3.19
	Annual energy consumption		kWh/a	1,156	1,218
	Required back up heating cap at design conditions		kW	0.76	0.81
Space heating (Warm climate)	Capacity	Pdesign	kW	2.05	2.16
	Energy efficiency class				A+++
	SCOP			5.87	5.86
	SCOPnet			5.99	5.97
	Annual energy consumption		kWh/a	489	516
	Required back up heating cap at design conditions		kW		0
Space cooling	A Condition	Pdc	kW	4.2	5
	(35°C - 27/19)	EERd		3.99	3.68
		Power input	kW	1.05	1.36
	B Condition	Pdc	kW	3.1	3.69
	(30°C - 27/19)	EERd		5.58	5.28
		Power input	kW	0.56	0.7
	C Condition	Pdc	kW	1.99	2.37
	(25°C - 27/19)	EERd		9.35	9.24
		Power input	kW	0.21	0.26
	D Condition	Pdc	kW	1.86	1.87
	(20°C - 27/19)	EERd		12.08	12.03
		Power input	kW	0.15	0.16

2 Specifications

2 - 1 Specifications

2

Technical specifications				FTXA42BT + RXA42B8		FTXA50BT + RXA50B8		
Space heating (Average climate)	TOL	Tol (temperature operating limit)		°C			-10	
	TBivalent	Tbiv (bivalent temperature)		°C			-7	
		Pdh (declared heating cap)		kW	3.37			3.54
		COPd (declared COP)					3.16	
	A Condition (-7°C)	Power input		kW	1.07			1.12
		Pdh (declared heating cap)		kW	3.37			3.54
		COPd (declared COP)					3.16	
	B Condition (2°C)	Power input		kW	1.07			1.12
		Pdh (declared heating cap)		kW	2.05			2.16
		COPd (declared COP)			4.47			4.46
	C Condition (7°C)	Power input		kW	0.46			0.48
		Pdh (declared heating cap)		kW	1.65			1.71
		COPd (declared COP)			6.33			6.32
	D Condition (12°C)	Power input		kW	0.26			0.27
		Pdh (declared heating cap)		kW		1.52		
COPd (declared COP)			7.35			7.25		
E condition (-10°C)	Power input		kW		0.21			
	Pdh (declared heating cap)		kW	3.04			3.19	
	COPd (declared COP)					2.98		
Space heating (Average climate)	E condition (-10°C)	Power input		kW	1.02			1.07
Space heating (Warm climate)	TOL	Tol (temperature operating limit)		°C			2	
	TBivalent	Tbiv (bivalent temperature)		°C			2	
		Pdh (declared heating cap)		kW	2.05			2.16
		COPd (declared COP)			4.47			4.46
	B Condition (2°C)	Power input		kW	0.46			0.48
		Pdh (declared heating cap)		kW	2.05			2.16
		COPd (declared COP)			4.47			4.46
	C Condition (7°C)	Power input		kW	0.46			0.48
		Pdh (declared heating cap)		kW	1.65			1.71
		COPd (declared COP)			6.33			6.32
	D Condition (12°C)	Power input		kW	0.26			0.27
		Pdh (declared heating cap)		kW		1.52		
		COPd (declared COP)			7.35			7.25
	E condition (2°C)	Power input		kW		0.21		
		Pdh (declared heating cap)		kW	2.05			2.16
COPd (declared COP)			4.47			4.46		
Power consumption in other than active mode	Power input		kW	0.46			0.48	
	Crankcase heater mode	PCK		W			0	
	Off mode	POFF		W			1	
Standby mode	Cooling	PSB		W			1	
	Heating	PSB		W			1	
Thermostat-off mode	PTO	Cooling	W				12	
		Heating	W				13	
Cooling	Cdc (Degradation cooling)					0.25		
Heating	Cdh (Degradation heating)					0.25		
Cooling function included							Yes	
Heating function included							Yes	
Average climate included							Yes	
Cold season included							No	
Warm season included							Yes	
Eurovent	Sound power level outdoor	Cooling	Nom.		dBA		62	
		Heating	Nom.		dBA		60	
	Piping length	Cooling	Measuring condition		m		5	
Voltage range	Min.						-10	
	Max.						10	
Electrical specifications				FTXA42BT + RXA42B8		FTXA50BT + RXA50B8		
Power factor	Nominal	Cooling	%		93.4	95.3		
		Heating	%		95.5	96.5		
Current - 50Hz	Maximum fuse amps (MFA)		A		13			
	Minimum circuit amps (MCA)		A		12.84			
Power supply	Frequency		Hz		50			
	Voltage		V		220-240			

2 Specifications

2 - 1 Specifications

Electrical specifications			FTXA42BT + RXA42B8	FTXA50BT + RXA50B8
Voltage range	Max.	%		10
	Min.	%		-10

(1)Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. |

(2)Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. |

(3)See separate drawing for operation range

Technical specifications			FTXA42AW + RXA42B8	FTXA50AW + RXA50B8
Cooling capacity	Min.	kW		1.7
	Min.	Btu/h		5,800
	Min.	kcal/h		1,462
	Nom.	kW	4.2	5
	Nom.	Btu/h	14,300	17,100
	Nom.	kcal/h	3,611	4,299
	Max.	kW	5	5.3
	Max.	Btu/h	17,100	18,100
Heating capacity	Min.	kW		1.7
	Min.	Btu/h		5,800
	Min.	kcal/h		1,462
	Nom.	kW	5.4	5.8
	Nom.	Btu/h	18,400	19,800
	Nom.	kcal/h	4,643	4,987
	Max.	kW	6	6.5
	Max.	Btu/h	20,500	22,200
Power input	Cooling	Nom. kW	1.05	1.36
	Heating	Nom. kW	1.31	1.45
Nominal efficiency	EER		3.99	3.68
	COP		4.12	4
	Annual energy consumption	kWh	526	679
	Energy labeling Directive	Cooling Heating		A A
Space cooling	Energy efficiency class			A++
	Capacity	Pdesign kW	4.2	5
	SEER		7.5	7.33
	Annual energy consumption	kWh/a	196	239
Space heating (Average climate)	Capacity	Pdesign kW	3.8	4
	Energy efficiency class			A++
	SCOP/A			4.6
	SCOPnet/A			4.65
	Pdh Heating capacity at -10°	kW	3.04	3.19
	Annual energy consumption	kWh/a	1,156	1,218
	Required back up heating cap at design conditions	kW	0.76	0.81
Space heating (Warm climate)	Capacity	Pdesign kW	2.05	2.16
	Energy efficiency class			A+++
	SCOP		5.87	5.86
	SCOPnet		5.99	5.97
	Annual energy consumption	kWh/a	489	516
	Required back up heating cap at design conditions	kW		0
Space cooling	A Condition	Pdc (35°C - 27/19) EERd	4.2	5
		Power input	3.99	3.68
	B Condition	Pdc (30°C - 27/19) EERd	1.05	1.36
		Power input	3.1	3.69
		Power input	5.58	5.28
	C Condition	Pdc (25°C - 27/19) EERd	0.56	0.7
		Power input	1.99	2.37
		Power input	9.35	9.24
	D Condition	Pdc (20°C - 27/19) EERd	0.21	0.26
		Power input	1.86	1.87
		Power input	12.08	12.03
		Power input	0.15	0.16

2 Specifications

2 - 1 Specifications

2

Technical specifications				FTXA42AW + RXA42B8		FTXA50AW + RXA50B8		
Space heating (Average climate)	TOL	Tol (temperature operating limit)		°C			-10	
		TBivalent	Tbiv (bivalent temperature)		°C			-7
	Pd _h (declared heating cap)		kW	3.37			3.54	
	COP _d (declared COP)						3.16	
	Power input		kW	1.07			1.12	
	A Condition (-7°C)	Pd _h (declared heating cap)		kW	3.37			3.54
		COP _d (declared COP)						3.16
		Power input		kW	1.07			1.12
	B Condition (2°C)	Pd _h (declared heating cap)		kW	2.05			2.16
		COP _d (declared COP)			4.47			4.46
		Power input		kW	0.46			0.48
	C Condition (7°C)	Pd _h (declared heating cap)		kW	1.65			1.71
		COP _d (declared COP)			6.33			6.32
		Power input		kW	0.26			0.27
	D Condition (12°C)	Pd _h (declared heating cap)		kW				1.52
COP _d (declared COP)			7.35			7.25		
Power input		kW				0.21		
E condition (-10°C)	Pd _h (declared heating cap)		kW	3.04			3.19	
	COP _d (declared COP)						2.98	
Space heating (Average climate)	E condition (-10°C)	Power input		kW	1.02			1.07
Space heating (Warm climate)	TOL	Tol (temperature operating limit)		°C			2	
		TBivalent	Tbiv (bivalent temperature)		°C			2
	Pd _h (declared heating cap)		kW	2.05			2.16	
	COP _d (declared COP)			4.47			4.46	
	Power input		kW	0.46			0.48	
	B Condition (2°C)	Pd _h (declared heating cap)		kW	2.05			2.16
		COP _d (declared COP)			4.47			4.46
		Power input		kW	0.46			0.48
	C Condition (7°C)	Pd _h (declared heating cap)		kW	1.65			1.71
		COP _d (declared COP)			6.33			6.32
		Power input		kW	0.26			0.27
	D Condition (12°C)	Pd _h (declared heating cap)		kW				1.52
		COP _d (declared COP)			7.35			7.25
		Power input		kW				0.21
	E condition (2°C)	Pd _h (declared heating cap)		kW	2.05			2.16
COP _d (declared COP)			4.47			4.46		
Power input		kW	0.46			0.48		
Power consumption in other than active mode	Crankcase heater mode	PCK		W			0	
	Off mode	POFF		W			1	
	Standby mode	Cooling	PSB		W			1
		Heating	PSB		W			1
	Thermo-stat-off mode	PTO	Cooling	W				12
Heating			W				13	
Cooling	Cdc (Degradation cooling)					0.25		
Heating	Cdh (Degradation heating)					0.25		
Cooling function included							Yes	
Heating function included							Yes	
Average climate included							Yes	
Cold season included							No	
Warm season included							Yes	
Eurovent	Sound power level outdoor	Cooling	Nom.		dBA		62	
		Heating	Nom.		dBA		60	
	Piping length	Cooling	Measuring condition		m		5	
Voltage range	Min.				%		-10	
	Max.				%		10	
Electrical specifications				FTXA42AW + RXA42B8		FTXA50AW + RXA50B8		
Power factor	Nominal	Cooling	%		93.4	95.3		
		Heating	%		95.5	96.5		
Current - 50Hz	Maximum fuse amps (MFA)		A		13			
	Minimum circuit amps (MCA)		A		12.84			
Power supply	Frequency		Hz		50			
	Voltage		V		220-240			

2 Specifications

2 - 1 Specifications

Electrical specifications			FTXA42AW + RXA42B8	FTXA50AW + RXA50B8
Voltage range	Max.	%		10
	Min.	%		-10

(1)Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. |

(2)Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. |

(3)See separate drawing for operation range

Technical specifications				FTXA42CB + RXA42B8	FTXA50CB + RXA50B8
Cooling capacity	Min.		kW		1.7
	Min.		Btu/h		5,800
	Min.		kcal/h		1,462
	Nom.		kW	4.2	5
	Nom.		Btu/h	14,300	17,100
	Nom.		kcal/h	3,611	4,299
	Max.		kW	5	5.3
	Max.		Btu/h	17,100	18,100
	Max.		kcal/h	4,299	4,557
Heating capacity	Min.		kW		1.7
	Min.		Btu/h		5,800
	Min.		kcal/h		1,462
	Nom.		kW	5.4	5.8
	Nom.		Btu/h	18,400	19,800
	Nom.		kcal/h	4,643	4,987
	Max.		kW	6	6.5
	Max.		Btu/h	20,500	22,200
	Max.		kcal/h	5,159	5,589
Power input	Cooling	Nom.	kW	1.05	1.36
	Heating	Nom.	kW	1.31	1.45
Nominal efficiency	EER			3.99	3.68
	COP			4.12	4
	Annual energy consumption		kWh	526	679
	Energy labeling Directive	Cooling			A
	Heating			A	
Space cooling	Energy efficiency class				A++
	Capacity	Pdesign	kW	4.2	5
	SEER			7.5	7.33
	Annual energy consumption		kWh/a	196	239
Space heating (Average climate)	Capacity	Pdesign	kW	3.8	4
	Energy efficiency class				A++
	SCOP/A				4.6
	SCOPnet/A				4.65
	Pdh Heating capacity at -10°		kW	3.04	3.19
	Annual energy consumption		kWh/a	1,156	1,218
	Required back up heating cap at design conditions		kW	0.76	0.81
Space heating (Warm climate)	Capacity	Pdesign	kW	2.05	2.16
	Energy efficiency class				A+++
	SCOP			5.87	5.86
	SCOPnet			5.99	5.97
	Annual energy consumption		kWh/a	489	516
	Required back up heating cap at design conditions		kW		0
Space cooling	A Condition	Pdc	kW	4.2	5
	(35°C - 27/19)	EERd		3.99	3.68
		Power input	kW	1.05	1.36
	B Condition	Pdc	kW	3.1	3.69
	(30°C - 27/19)	EERd		5.58	5.28
		Power input	kW	0.56	0.7
	C Condition	Pdc	kW	1.99	2.37
	(25°C - 27/19)	EERd		9.35	9.24
		Power input	kW	0.21	0.26
	D Condition	Pdc	kW	1.86	1.87
	(20°C - 27/19)	EERd		12.08	12.03
		Power input	kW	0.15	0.16

2 Specifications

2 - 1 Specifications

2

Technical specifications				FTXA42CB + RXA42B8		FTXA50CB + RXA50B8		
Space heating (Average climate)	TOL	Tol (temperature operating limit)		°C			-10	
		TBivalent	Tbiv (bivalent temperature)		°C			-7
	Pd _h (declared heating cap)		kW	3.37			3.54	
	COP _d (declared COP)				3.16			
	Power input		kW	1.07			1.12	
	A Condition (-7°C)	Pd _h (declared heating cap)		kW	3.37			3.54
		COP _d (declared COP)				3.16		
		Power input		kW	1.07			1.12
	B Condition (2°C)	Pd _h (declared heating cap)		kW	2.05			2.16
		COP _d (declared COP)			4.47			4.46
		Power input		kW	0.46			0.48
	C Condition (7°C)	Pd _h (declared heating cap)		kW	1.65			1.71
		COP _d (declared COP)			6.33			6.32
		Power input		kW	0.26			0.27
	D Condition (12°C)	Pd _h (declared heating cap)		kW		1.52		
COP _d (declared COP)			7.35			7.25		
Power input		kW		0.21				
E condition (-10°C)	Pd _h (declared heating cap)		kW	3.04			3.19	
	COP _d (declared COP)				2.98			
Space heating (Average climate)	E condition (-10°C)	Power input		kW	1.02			1.07
Space heating (Warm climate)	TOL	Tol (temperature operating limit)		°C			2	
		TBivalent	Tbiv (bivalent temperature)		°C			2
	Pd _h (declared heating cap)		kW	2.05			2.16	
	COP _d (declared COP)			4.47			4.46	
	Power input		kW	0.46			0.48	
	B Condition (2°C)	Pd _h (declared heating cap)		kW	2.05			2.16
		COP _d (declared COP)			4.47			4.46
		Power input		kW	0.46			0.48
	C Condition (7°C)	Pd _h (declared heating cap)		kW	1.65			1.71
		COP _d (declared COP)			6.33			6.32
		Power input		kW	0.26			0.27
	D Condition (12°C)	Pd _h (declared heating cap)		kW		1.52		
		COP _d (declared COP)			7.35			7.25
		Power input		kW		0.21		
	E condition (2°C)	Pd _h (declared heating cap)		kW	2.05			2.16
COP _d (declared COP)			4.47			4.46		
Power input		kW	0.46			0.48		
Power consumption in other than active mode	Crankcase heater mode	PCK		W			0	
	Off mode	POFF		W			1	
	Standby mode	Cooling	PSB		W			1
		Heating	PSB		W			1
	Thermo-stat-off mode	PTO	Cooling	W				12
Heating			W				13	
Cooling	Cdc (Degradation cooling)					0.25		
Heating	Cdh (Degradation heating)					0.25		
Cooling function included							Yes	
Heating function included							Yes	
Average climate included							Yes	
Cold season included							No	
Warm season included							Yes	
Eurovent	Sound power level outdoor	Cooling	Nom.		dB _A			62
		Heating	Nom.		dB _A			60
	Piping length	Cooling	Measuring condition		m			5
Voltage range	Min.						-10	
	Max.						10	
Electrical specifications				FTXA42CB + RXA42B8		FTXA50CB + RXA50B8		
Power factor	Nominal	Cooling	%		93.4			95.3
		Heating	%		95.5			96.5
Current - 50Hz	Maximum fuse amps (MFA)		A				13	
	Minimum circuit amps (MCA)		A				12.84	
Power supply	Frequency		Hz				50	
	Voltage		V				220-240	

2 Specifications

2 - 1 Specifications

Electrical specifications			FTXA42CB + RXA42B8	FTXA50CB + RXA50B8
Voltage range	Max.	%		10
	Min.	%		-10

(1)Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. |

(2)Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. |

(3)See separate drawing for operation range

Technical specifications				FTXA42CS + RXA42B8	FTXA50CS + RXA50B8
Cooling capacity	Min.		kW		1.7
	Min.		Btu/h		5,800
	Min.		kcal/h		1,462
	Nom.		kW	4.2	5
	Nom.		Btu/h	14,300	17,100
	Nom.		kcal/h	3,611	4,299
	Max.		kW	5	5.3
	Max.		Btu/h	17,100	18,100
	Max.		kcal/h	4,299	4,557
Heating capacity	Min.		kW		1.7
	Min.		Btu/h		5,800
	Min.		kcal/h		1,462
	Nom.		kW	5.4	5.8
	Nom.		Btu/h	18,400	19,800
	Nom.		kcal/h	4,643	4,987
	Max.		kW	6	6.5
	Max.		Btu/h	20,500	22,200
	Max.		kcal/h	5,159	5,589
Power input	Cooling	Nom.	kW	1.05	1.36
	Heating	Nom.	kW	1.31	1.45
Nominal efficiency	EER			3.99	3.68
	COP			4.12	4
	Annual energy consumption		kWh	526	679
	Energy labeling Directive	Cooling			A
	Heating			A	
Space cooling	Energy efficiency class				A++
	Capacity	Pdesign	kW	4.2	5
	SEER			7.5	7.33
	Annual energy consumption		kWh/a	196	239
Space heating (Average climate)	Capacity	Pdesign	kW	3.8	4
	Energy efficiency class				A++
	SCOP/A				4.6
	SCOPnet/A				4.65
	Pdh Heating capacity at -10°		kW	3.04	3.19
	Annual energy consumption		kWh/a	1,156	1,218
	Required back up heating cap at design conditions		kW	0.76	0.81
Space heating (Warm climate)	Capacity	Pdesign	kW	2.05	2.16
	Energy efficiency class				A+++
	SCOP			5.87	5.86
	SCOPnet			5.99	5.97
	Annual energy consumption		kWh/a	489	516
	Required back up heating cap at design conditions		kW		0
Space cooling	A Condition	Pdc	kW	4.2	5
	(35°C - 27/19)	EERd		3.99	3.68
		Power input	kW	1.05	1.36
	B Condition	Pdc	kW	3.1	3.69
	(30°C - 27/19)	EERd		5.58	5.28
		Power input	kW	0.56	0.7
	C Condition	Pdc	kW	1.99	2.37
	(25°C - 27/19)	EERd		9.35	9.24
		Power input	kW	0.21	0.26
	D Condition	Pdc	kW	1.86	1.87
	(20°C - 27/19)	EERd		12.08	12.03
		Power input	kW	0.15	0.16

2 Specifications

2 - 1 Specifications

2

Technical specifications				FTXA42CS + RXA42B8		FTXA50CS + RXA50B8		
Space heating (Average climate)	TOL	Tol (temperature operating limit)		°C			-10	
	TBivalent	Tbiv (bivalent temperature)		°C			-7	
		Pdh (declared heating cap)		kW	3.37			3.54
		COPd (declared COP)				3.16		
	A Condition (-7°C)	Power input		kW	1.07			1.12
		Pdh (declared heating cap)		kW	3.37			3.54
		COPd (declared COP)				3.16		
	B Condition (2°C)	Power input		kW	1.07			1.12
		Pdh (declared heating cap)		kW	2.05			2.16
		COPd (declared COP)			4.47			4.46
	C Condition (7°C)	Power input		kW	0.46			0.48
		Pdh (declared heating cap)		kW	1.65			1.71
		COPd (declared COP)			6.33			6.32
	D Condition (12°C)	Power input		kW	0.26			0.27
		Pdh (declared heating cap)		kW		1.52		
COPd (declared COP)			7.35			7.25		
E condition (-10°C)	Power input		kW		0.21			
	Pdh (declared heating cap)		kW	3.04			3.19	
Space heating (Average climate)	COPd (declared COP)				2.98			
	Power input		kW	1.02			1.07	
Space heating (Warm climate)	TOL	Tol (temperature operating limit)		°C			2	
	TBivalent	Tbiv (bivalent temperature)		°C			2	
		Pdh (declared heating cap)		kW	2.05			2.16
		COPd (declared COP)			4.47			4.46
	B Condition (2°C)	Power input		kW	0.46			0.48
		Pdh (declared heating cap)		kW	2.05			2.16
		COPd (declared COP)			4.47			4.46
	C Condition (7°C)	Power input		kW	0.46			0.48
		Pdh (declared heating cap)		kW	1.65			1.71
		COPd (declared COP)			6.33			6.32
	D Condition (12°C)	Power input		kW	0.26			0.27
		Pdh (declared heating cap)		kW		1.52		
		COPd (declared COP)			7.35			7.25
	E condition (2°C)	Power input		kW		0.21		
		Pdh (declared heating cap)		kW	2.05			2.16
	COPd (declared COP)			4.47			4.46	
	Power input		kW	0.46			0.48	
Power consumption in other than active mode	Crankcase heater mode		PCK	W			0	
	Off mode		POFF	W			1	
	Standby mode	Cooling		PSB	W			1
		Heating		PSB	W			1
	Thermo-stat-off mode	Cooling		PTO	W			12
Heating			W			13		
Cooling	Cdc (Degradation cooling)						0.25	
Heating	Cdh (Degradation heating)						0.25	
Cooling function included							Yes	
Heating function included							Yes	
Average climate included							Yes	
Cold season included							No	
Warm season included							Yes	
Eurovent	Sound power level outdoor	Cooling	Nom.	dB(A)			62	
		Heating	Nom.	dB(A)			60	
	Piping length	Cooling	Measuring condition	m			5	
Voltage range	Min.						-10	
	Max.						10	
Electrical specifications				FTXA42CS + RXA42B8		FTXA50CS + RXA50B8		
Power factor	Nominal	Cooling	%	93.4			95.3	
		Heating	%	95.5			96.5	
Current - 50Hz	Maximum fuse amps (MFA)						13	
	Minimum circuit amps (MCA)						12.84	
Power supply	Frequency						50	
	Voltage						220-240	

2 Specifications

2 - 1 Specifications

Electrical specifications			FTXA42CS + RXA42B8	FTXA50CS + RXA50B8
Voltage range	Max.	%		10
	Min.	%		-10

(1)Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. |

(2)Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. |

(3)See separate drawing for operation range

Technical specifications				FTXA42CW + RXA42B8	FTXA50CW + RXA50B8	
Cooling capacity	Min.		kW		1.7	
	Min.		Btu/h		5,800	
	Min.		kcal/h		1,462	
	Nom.		kW	4.2	5	
	Nom.		Btu/h	14,300	17,100	
	Nom.		kcal/h	3,611	4,299	
	Max.		kW	5	5.3	
	Max.		Btu/h	17,100	18,100	
	Max.		kcal/h	4,299	4,557	
Heating capacity	Min.		kW		1.7	
	Min.		Btu/h		5,800	
	Min.		kcal/h		1,462	
	Nom.		kW	5.4	5.8	
	Nom.		Btu/h	18,400	19,800	
	Nom.		kcal/h	4,643	4,987	
	Max.		kW	6	6.5	
	Max.		Btu/h	20,500	22,200	
	Max.		kcal/h	5,159	5,589	
Power input	Cooling	Nom.	kW	1.05	1.36	
	Heating	Nom.	kW	1.31	1.45	
Nominal efficiency	EER			3.99	3.68	
	COP			4.12	4	
	Annual energy consumption		kWh	526	679	
	Energy labeling	Cooling			A	
	Directive	Heating			A	
Space cooling	Energy efficiency class				A++	
	Capacity	Pdesign	kW	4.2	5	
	SEER			7.5	7.33	
	Annual energy consumption		kWh/a	196	239	
Space heating (Average climate)	Capacity	Pdesign	kW	3.8	4	
	Energy efficiency class				A++	
	SCOP/A			4.6		
	SCOPnet/A			4.65		
	Pdh Heating capacity at -10°		kW	3.04	3.19	
	Annual energy consumption		kWh/a	1,156	1,218	
	Required back up heating cap at design conditions		kW	0.76	0.81	
	Capacity	Pdesign	kW	2.05	2.16	
Space heating (Warm climate)	Energy efficiency class				A+++	
	SCOP			5.87	5.86	
	SCOPnet			5.99	5.97	
	Annual energy consumption		kWh/a	489	516	
	Required back up heating cap at design conditions		kW		0	
	Space cooling	A Condition	Pdc	kW	4.2	5
		(35°C - 27/19)	EERd		3.99	3.68
			Power input	kW	1.05	1.36
B Condition		Pdc	kW	3.1	3.69	
(30°C - 27/19)		EERd		5.58	5.28	
		Power input	kW	0.56	0.7	
C Condition		Pdc	kW	1.99	2.37	
(25°C - 27/19)		EERd		9.35	9.24	
		Power input	kW	0.21	0.26	
D Condition		Pdc	kW	1.86	1.87	
(20°C - 27/19)		EERd		12.08	12.03	
		Power input	kW	0.15	0.16	

2 Specifications

2 - 1 Specifications

2

Technical specifications				FTXA42CW + RXA42B8	FTXA50CW + RXA50B8	
Space heating (Average climate)	TOL	Tol (temperature operating limit)		°C	-10	
	TBivalent	Tbiv (bivalent temperature)		°C	-7	
		Pdh (declared heating cap)		kW	3.37	3.54
		COPd (declared COP)			3.16	
		Power input		kW	1.07	1.12
	A Condition (-7°C)	Pdh (declared heating cap)		kW	3.37	3.54
		COPd (declared COP)			3.16	
		Power input		kW	1.07	1.12
	B Condition (2°C)	Pdh (declared heating cap)		kW	2.05	2.16
		COPd (declared COP)			4.47	4.46
		Power input		kW	0.46	0.48
	C Condition (7°C)	Pdh (declared heating cap)		kW	1.65	1.71
		COPd (declared COP)			6.33	6.32
		Power input		kW	0.26	0.27
	D Condition (12°C)	Pdh (declared heating cap)		kW		1.52
COPd (declared COP)			7.35	7.25		
Power input		kW		0.21		
E condition (-10°C)	Pdh (declared heating cap)		kW	3.04	3.19	
	COPd (declared COP)			2.98		
Space heating (Average climate)	E condition (-10°C)	Power input		kW	1.02	1.07
Space heating (Warm climate)	TOL	Tol (temperature operating limit)		°C	2	
	TBivalent	Tbiv (bivalent temperature)		°C	2	
		Pdh (declared heating cap)		kW	2.05	2.16
		COPd (declared COP)			4.47	4.46
		Power input		kW	0.46	0.48
	B Condition (2°C)	Pdh (declared heating cap)		kW	2.05	2.16
		COPd (declared COP)			4.47	4.46
		Power input		kW	0.46	0.48
	C Condition (7°C)	Pdh (declared heating cap)		kW	1.65	1.71
		COPd (declared COP)			6.33	6.32
		Power input		kW	0.26	0.27
	D Condition (12°C)	Pdh (declared heating cap)		kW		1.52
		COPd (declared COP)			7.35	7.25
		Power input		kW		0.21
	E condition (2°C)	Pdh (declared heating cap)		kW	2.05	2.16
COPd (declared COP)			4.47	4.46		
Power input		kW	0.46	0.48		
Power consumption in other than active mode	Crankcase heater mode	PCK		W	0	
	Off mode	POFF		W	1	
	Standby mode	Cooling	PSB		W	1
		Heating	PSB		W	1
	Thermo-stat-off mode	PTO	Cooling	W		12
Heating			W		13	
Cooling	Cdc (Degradation cooling)			0.25		
Heating	Cdh (Degradation heating)			0.25		
Cooling function included					Yes	
Heating function included					Yes	
Average climate included					Yes	
Cold season included					No	
Warm season included					Yes	
Eurovent	Sound power level outdoor	Cooling	Nom.	dB(A)	62	
		Heating	Nom.	dB(A)	60	
	Piping length	Cooling	Measuring condition		m	5
Voltage range	Min.				%	-10
	Max.				%	10
Electrical specifications				FTXA42CW + RXA42B8	FTXA50CW + RXA50B8	
Power factor	Nominal	Cooling	%	93.4	95.3	
		Heating	%	95.5	96.5	
Current - 50Hz	Maximum fuse amps (MFA)		A		13	
	Minimum circuit amps (MCA)		A		12.84	
Power supply	Frequency		Hz		50	
	Voltage		V		220-240	

2 Specifications

2 - 1 Specifications

Electrical specifications			FTXA42CW + RXA42B8	FTXA50CW + RXA50B8
Voltage range	Max.	%		10
	Min.	%		-10

(1)Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. |

(2)Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. |

(3)See separate drawing for operation range

Technical specifications				FTXA42DC + RXA42B8	FTXA50DC + RXA50B8
Cooling capacity	Min.		kW		1.70
	Min.		Btu/h		5,800
	Min.		kcal/h		1,462
	Nom.		kW	4.20	5.00
	Nom.		Btu/h	14,300	17,100
	Nom.		kcal/h	3,611	4,299
	Max.		kW	5.00	5.30
	Max.		Btu/h	17,100	18,100
	Max.		kcal/h	4,299	4,557
Heating capacity	Min.		kW		1.70
	Min.		Btu/h		5,800
	Min.		kcal/h		1,462
	Nom.		kW	5.40	5.80
	Nom.		Btu/h	18,400	19,800
	Nom.		kcal/h	4,643	4,987
	Max.		kW	6.00	6.50
	Max.		Btu/h	20,500	22,200
	Max.		kcal/h	5,159	5,589
Power input	Cooling	Nom.	kW	1.05	1.36
	Heating	Nom.	kW	1.31	1.45
Nominal efficiency	EER			3.99	3.68
	COP			4.12	4.00
	Annual energy consumption		kWh	526	679
	Energy labeling Directive	Cooling			A
	Heating			A	
Space cooling	Energy efficiency class				A++
	Capacity	Pdesign	kW	4.20	5.00
	SEER			7.50	7.33
	Annual energy consumption		kWh/a	196	239
Space heating (Average climate)	Capacity	Pdesign	kW	3.80	4.00
	Energy efficiency class				A++
	SCOP/A				4.60
	SCOPnet/A				4.65
	Pdh Heating capacity at -10°		kW	3.04	3.19
	Annual energy consumption		kWh/a	1,156	1,218
	Required back up heating cap at design conditions		kW	0.76	0.81
Space heating (Warm climate)	Capacity	Pdesign	kW	2.05	2.16
	Energy efficiency class				A+++
	SCOP			5.87	5.86
	SCOPnet			5.99	5.97
	Annual energy consumption		kWh/a	489	516
	Required back up heating cap at design conditions		kW		0.00
Space cooling	A Condition	Pdc	kW	4.20	5.00
	(35°C - 27/19)	EERd		3.99	3.68
		Power input	kW	1.05	1.36
	B Condition	Pdc	kW	3.10	3.69
	(30°C - 27/19)	EERd		5.58	5.28
		Power input	kW	0.56	0.70
	C Condition	Pdc	kW	1.99	2.37
	(25°C - 27/19)	EERd		9.35	9.24
		Power input	kW	0.21	0.26
	D Condition	Pdc	kW	1.86	1.87
	(20°C - 27/19)	EERd		12.08	12.03
		Power input	kW	0.15	0.16

2 Specifications

2 - 1 Specifications

2

Technical specifications				FTXA42DC + RXA42B8		FTXA50DC + RXA50B8		
Space heating (Average climate)	TOL	Tol (temperature operating limit)		°C			-15	
	TBivalent	Tbiv (bivalent temperature)		°C			-7	
		Pdh (declared heating cap)		kW	3.37			3.54
		COPd (declared COP)					3.16	
		Power input		kW	1.07			1.12
	A Condition (-7°C)	Pdh (declared heating cap)		kW	3.37			3.54
		COPd (declared COP)					3.16	
		Power input		kW	1.07			1.12
	B Condition (2°C)	Pdh (declared heating cap)		kW	2.05			2.16
		COPd (declared COP)			4.47			4.46
		Power input		kW	0.46			0.48
	C Condition (7°C)	Pdh (declared heating cap)		kW	1.65			1.71
		COPd (declared COP)			6.33			6.32
		Power input		kW	0.26			0.27
	D Condition (12°C)	Pdh (declared heating cap)		kW			1.52	
COPd (declared COP)			7.35			7.25		
Power input		kW			0.21			
E condition (-10°C)	Pdh (declared heating cap)		kW	3.04			3.19	
	COPd (declared COP)					2.98		
Space heating (Average climate)	E condition (-10°C)	Power input		kW	1.02			1.07
Space heating (Warm climate)	TOL	Tol (temperature operating limit)		°C			-15	
	TBivalent	Tbiv (bivalent temperature)		°C			2	
		Pdh (declared heating cap)		kW	2.05			2.16
		COPd (declared COP)			4.47			4.46
		Power input		kW	0.46			0.48
	B Condition (2°C)	Pdh (declared heating cap)		kW	2.05			2.16
		COPd (declared COP)			4.47			4.46
		Power input		kW	0.46			0.48
	C Condition (7°C)	Pdh (declared heating cap)		kW	1.65			1.71
		COPd (declared COP)			6.33			6.32
		Power input		kW	0.26			0.27
	D Condition (12°C)	Pdh (declared heating cap)		kW			1.52	
		COPd (declared COP)			7.35			7.25
		Power input		kW			0.21	
	E condition (2°C)	Pdh (declared heating cap)		kW	2.05			2.16
COPd (declared COP)			4.47			4.46		
Power input		kW	0.46			0.48		
Power consumption in other than active mode	Crankcase heater mode	PCK		W			0	
	Off mode	POFF		W			1	
	Standby mode	Cooling	PSB		W			1
		Heating	PSB		W			1
	Thermo-stat-off mode	PTO	Cooling	W				12
Heating			W				13	
Cooling	Cdc (Degradation cooling)					0.25		
Heating	Cdh (Degradation heating)					0.25		
Cooling function included							Yes	
Heating function included							Yes	
Average climate included							Yes	
Cold season included							No	
Warm season included							Yes	
Eurovent	Sound power level outdoor	Cooling	Nom.	dB(A)			62	
		Heating	Nom.	dB(A)			60	
	Piping length	Cooling	Measuring condition		m			5.00
Voltage range	Min.						-10	
	Max.						10	
Electrical specifications				FTXA42DC + RXA42B8		FTXA50DC + RXA50B8		
Power factor	Nominal	Cooling	%	93.40			95.30	
		Heating	%	95.50			96.50	
Current - 50Hz	Maximum fuse amps (MFA)		A		13.00			
	Minimum circuit amps (MCA)		A		12.84			
Power supply	Frequency		Hz		50			
	Voltage		V		220-240			

2 Specifications

2 - 1 Specifications

Electrical specifications			FTXA42DC + RXA42B8	FTXA50DC + RXA50B8
Voltage range	Max.	%		10
	Min.	%		-10

(1)Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. |

(2)Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. |

(3)See separate drawing for operation range

Technical specifications				FTXA42DG + RXA42B8	FTXA50DG + RXA50B8
Cooling capacity	Min.		kW		1.70
	Min.		Btu/h		5,800
	Min.		kcal/h		1,462
	Nom.		kW	4.20	5.00
	Nom.		Btu/h	14,300	17,100
	Nom.		kcal/h	3,611	4,299
	Max.		kW	5.00	5.30
	Max.		Btu/h	17,100	18,100
	Max.		kcal/h	4,299	4,557
Heating capacity	Min.		kW		1.70
	Min.		Btu/h		5,800
	Min.		kcal/h		1,462
	Nom.		kW	5.40	5.80
	Nom.		Btu/h	18,400	19,800
	Nom.		kcal/h	4,643	4,987
	Max.		kW	6.00	6.50
	Max.		Btu/h	20,500	22,200
	Max.		kcal/h	5,159	5,589
Power input	Cooling	Nom.	kW	1.05	1.36
	Heating	Nom.	kW	1.31	1.45
Nominal efficiency	EER			3.99	3.68
	COP			4.12	4.00
	Annual energy consumption		kWh	526	679
	Energy labeling Directive	Cooling			A
	Heating			A	
Space cooling	Energy efficiency class				A++
	Capacity	Pdesign	kW	4.20	5.00
	SEER			7.50	7.33
	Annual energy consumption		kWh/a	196	239
Space heating (Average climate)	Capacity	Pdesign	kW	3.80	4.00
	Energy efficiency class				A++
	SCOP/A				4.60
	SCOPnet/A				4.65
	Pdh Heating capacity at -10°		kW	3.04	3.19
	Annual energy consumption		kWh/a	1,156	1,218
	Required back up heating cap at design conditions		kW	0.76	0.81
	Capacity	Pdesign	kW	2.05	2.16
Space heating (Warm climate)	Energy efficiency class				A+++
	SCOP			5.87	5.86
	SCOPnet			5.99	5.97
	Annual energy consumption		kWh/a	489	516
	Required back up heating cap at design conditions		kW		0.00
	Space cooling	A Condition	Pdc	kW	4.20
(35°C - 27/19)		EERd		3.99	3.68
		Power input	kW	1.05	1.36
B Condition		Pdc	kW	3.10	3.69
(30°C - 27/19)		EERd		5.58	5.28
		Power input	kW	0.56	0.70
C Condition		Pdc	kW	1.99	2.37
(25°C - 27/19)		EERd		9.35	9.24
		Power input	kW	0.21	0.26
D Condition		Pdc	kW	1.86	1.87
(20°C - 27/19)		EERd		12.08	12.03
		Power input	kW	0.15	0.16

2 Specifications

2 - 1 Specifications

2

Technical specifications				FTXA42DG + RXA42B8	FTXA50DG + RXA50B8	
Space heating (Average climate)	TOL	Tol (temperature operating limit) °C			-15	
	TBivalent	Tbiv (bivalent temperature) °C			-7	
		Pdh (declared heating cap) kW		3.37	3.54	
		COPd (declared COP)			3.16	
		Power input kW		1.07	1.12	
	A Condition (-7°C)	Pdh (declared heating cap) kW		3.37	3.54	
		COPd (declared COP)			3.16	
		Power input kW		1.07	1.12	
	B Condition (2°C)	Pdh (declared heating cap) kW		2.05	2.16	
		COPd (declared COP)		4.47	4.46	
		Power input kW		0.46	0.48	
	C Condition (7°C)	Pdh (declared heating cap) kW		1.65	1.71	
		COPd (declared COP)		6.33	6.32	
		Power input kW		0.26	0.27	
	D Condition (12°C)	Pdh (declared heating cap) kW			1.52	
COPd (declared COP)		7.35	7.25			
Power input kW			0.21			
E condition (-10°C)	Pdh (declared heating cap) kW		3.04	3.19		
	COPd (declared COP)			2.98		
Space heating (Average climate)	E condition (-10°C)	Power input kW		1.02	1.07	
Space heating (Warm climate)	TOL	Tol (temperature operating limit) °C			-15	
	TBivalent	Tbiv (bivalent temperature) °C			2	
		Pdh (declared heating cap) kW		2.05	2.16	
		COPd (declared COP)		4.47	4.46	
		Power input kW		0.46	0.48	
	B Condition (2°C)	Pdh (declared heating cap) kW		2.05	2.16	
		COPd (declared COP)		4.47	4.46	
		Power input kW		0.46	0.48	
	C Condition (7°C)	Pdh (declared heating cap) kW		1.65	1.71	
		COPd (declared COP)		6.33	6.32	
		Power input kW		0.26	0.27	
	D Condition (12°C)	Pdh (declared heating cap) kW			1.52	
		COPd (declared COP)		7.35	7.25	
		Power input kW			0.21	
	E condition (2°C)	Pdh (declared heating cap) kW		2.05	2.16	
COPd (declared COP)		4.47	4.46			
Power input kW		0.46	0.48			
Power consumption in other than active mode	Crankcase heater mode	PCK W			0	
	Off mode	POFF W			1	
	Standby mode	Cooling	PSB W			1
		Heating	PSB W			1
	Thermo-stat-off mode	PTO	Cooling	W		12
Heating			W		13	
Cooling	Cdc (Degradation cooling)			0.25		
Heating	Cdh (Degradation heating)			0.25		
Cooling function included					Yes	
Heating function included					Yes	
Average climate included					Yes	
Cold season included					No	
Warm season included					Yes	
Eurovent	Sound power level outdoor	Cooling	Nom.	dB(A)	62	
		Heating	Nom.	dB(A)	60	
	Piping length	Cooling	Measuring condition m		5.00	
Voltage range	Min.				-10	
	Max.				10	
Electrical specifications				FTXA42DG + RXA42B8	FTXA50DG + RXA50B8	
Power factor	Nominal	Cooling	%	93.40	95.30	
		Heating	%	95.50	96.50	
Current - 50Hz	Maximum fuse amps (MFA)		A	13.00		
	Minimum circuit amps (MCA)		A	12.84		
Power supply	Frequency		Hz	50		
	Voltage		V	220-240		

2 Specifications

2 - 1 Specifications

Electrical specifications			FTXA42DG + RXA42B8	FTXA50DG + RXA50B8
Voltage range	Max.	%		10
	Min.	%		-10

(1)Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. |

(2)Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. |

(3)See separate drawing for operation range

Technical specifications				FTXA42DL + RXA42B8	FTXA50DL + RXA50B8	
Cooling capacity	Min.		kW		1.70	
	Min.		Btu/h		5,800	
	Min.		kcal/h		1,462	
	Nom.		kW	4.20	5.00	
	Nom.		Btu/h	14,300	17,100	
	Nom.		kcal/h	3,611	4,299	
	Max.		kW	5.00	5.30	
	Max.		Btu/h	17,100	18,100	
	Max.		kcal/h	4,299	4,557	
Heating capacity	Min.		kW		1.70	
	Min.		Btu/h		5,800	
	Min.		kcal/h		1,462	
	Nom.		kW	5.40	5.80	
	Nom.		Btu/h	18,400	19,800	
	Nom.		kcal/h	4,643	4,987	
	Max.		kW	6.00	6.50	
	Max.		Btu/h	20,500	22,200	
	Max.		kcal/h	5,159	5,589	
Power input	Cooling	Nom.	kW	1.05	1.36	
	Heating	Nom.	kW	1.31	1.45	
Nominal efficiency	EER			3.99	3.68	
	COP			4.12	4.00	
	Annual energy consumption		kWh	526	679	
	Energy labeling Directive	Cooling			A	
	Heating			A		
Space cooling	Energy efficiency class				A++	
	Capacity	Pdesign	kW	4.20	5.00	
	SEER			7.50	7.33	
	Annual energy consumption		kWh/a	196	239	
Space heating (Average climate)	Capacity	Pdesign	kW	3.80	4.00	
	Energy efficiency class				A++	
	SCOP/A				4.60	
	SCOPnet/A				4.65	
	Pdh Heating capacity at -10°		kW	3.04	3.19	
	Annual energy consumption		kWh/a	1,156	1,218	
	Required back up heating cap at design conditions		kW	0.76	0.81	
	Capacity	Pdesign	kW	2.05	2.16	
Space heating (Warm climate)	Energy efficiency class				A+++	
	SCOP			5.87	5.86	
	SCOPnet			5.99	5.97	
	Annual energy consumption		kWh/a	489	516	
	Required back up heating cap at design conditions		kW		0.00	
	Space cooling	A Condition	Pdc	kW	4.20	5.00
		(35°C - 27/19)	EERd		3.99	3.68
			Power input	kW	1.05	1.36
B Condition		Pdc	kW	3.10	3.69	
(30°C - 27/19)		EERd		5.58	5.28	
		Power input	kW	0.56	0.70	
C Condition		Pdc	kW	1.99	2.37	
(25°C - 27/19)		EERd		9.35	9.24	
		Power input	kW	0.21	0.26	
D Condition		Pdc	kW	1.86	1.87	
(20°C - 27/19)		EERd		12.08	12.03	
		Power input	kW	0.15	0.16	

2 Specifications

2 - 1 Specifications

2

Technical specifications				FTXA42DL + RXA42B8		FTXA50DL + RXA50B8		
Space heating (Average climate)	TOL	Tol (temperature operating limit)		°C			-15	
	TBivalent	Tbiv (bivalent temperature)		°C			-7	
		Pdh (declared heating cap)		kW	3.37			3.54
		COPd (declared COP)					3.16	
	A Condition (-7°C)	Power input		kW	1.07			1.12
		Pdh (declared heating cap)		kW	3.37			3.54
		COPd (declared COP)					3.16	
	B Condition (2°C)	Power input		kW	1.07			1.12
		Pdh (declared heating cap)		kW	2.05			2.16
		COPd (declared COP)			4.47			4.46
	C Condition (7°C)	Power input		kW	0.46			0.48
		Pdh (declared heating cap)		kW	1.65			1.71
		COPd (declared COP)			6.33			6.32
	D Condition (12°C)	Power input		kW	0.26			0.27
		Pdh (declared heating cap)		kW		1.52		
COPd (declared COP)			7.35			7.25		
E condition (-10°C)	Power input		kW		0.21			
	Pdh (declared heating cap)		kW	3.04			3.19	
Space heating (Average climate)	COPd (declared COP)			2.98				
	Power input		kW	1.02			1.07	
Space heating (Warm climate)	TOL	Tol (temperature operating limit)		°C			-15	
	TBivalent	Tbiv (bivalent temperature)		°C			2	
		Pdh (declared heating cap)		kW	2.05			2.16
		COPd (declared COP)			4.47			4.46
	B Condition (2°C)	Power input		kW	0.46			0.48
		Pdh (declared heating cap)		kW	2.05			2.16
		COPd (declared COP)			4.47			4.46
	C Condition (7°C)	Power input		kW	0.46			0.48
		Pdh (declared heating cap)		kW	1.65			1.71
		COPd (declared COP)			6.33			6.32
	D Condition (12°C)	Power input		kW	0.26			0.27
		Pdh (declared heating cap)		kW		1.52		
		COPd (declared COP)			7.35			7.25
	E condition (2°C)	Power input		kW		0.21		
		Pdh (declared heating cap)		kW	2.05			2.16
	COPd (declared COP)			4.47			4.46	
	Power input		kW	0.46			0.48	
Power consumption in other than active mode	Crankcase heater mode		PCK	W			0	
	Off mode		POFF	W			1	
	Standby mode	Cooling		PSB	W			1
		Heating		PSB	W			1
	Thermostat-off mode	Cooling		PTO	W			12
Heating			W			13		
Cooling	Cdc (Degradation cooling)						0.25	
Heating	Cdh (Degradation heating)						0.25	
Cooling function included							Yes	
Heating function included							Yes	
Average climate included							Yes	
Cold season included							No	
Warm season included							Yes	
Eurovent	Sound power level outdoor	Cooling	Nom.	dB(A)			62	
		Heating	Nom.	dB(A)			60	
	Piping length	Cooling	Measuring condition	m			5.00	
Voltage range	Min.						-10	
	Max.						10	
Electrical specifications				FTXA42DL + RXA42B8		FTXA50DL + RXA50B8		
Power factor	Nominal	Cooling	%	93.40			95.30	
		Heating	%	95.50			96.50	
Current - 50Hz	Maximum fuse amps (MFA)		A	13.00				
	Minimum circuit amps (MCA)		A	12.84				
Power supply	Frequency		Hz	50				
	Voltage		V	220-240				

2 Specifications

2 - 1 Specifications

Electrical specifications			FTXA42DL + RXA42B8	FTXA50DL + RXA50B8
Voltage range	Max.	%		10
	Min.	%		-10

(1)Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. |

(2)Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. |

(3)See separate drawing for operation range

Technical specifications				FTXA42DP + RXA42B8	FTXA50DP + RXA50B8	
Cooling capacity	Min.		kW		1.70	
	Min.		Btu/h		5,800	
	Min.		kcal/h		1,462	
	Nom.		kW	4.20	5.00	
	Nom.		Btu/h	14,300	17,100	
	Nom.		kcal/h	3,611	4,299	
	Max.		kW	5.00	5.30	
	Max.		Btu/h	17,100	18,100	
	Max.		kcal/h	4,299	4,557	
Heating capacity	Min.		kW		1.70	
	Min.		Btu/h		5,800	
	Min.		kcal/h		1,462	
	Nom.		kW	5.40	5.80	
	Nom.		Btu/h	18,400	19,800	
	Nom.		kcal/h	4,643	4,987	
	Max.		kW	6.00	6.50	
	Max.		Btu/h	20,500	22,200	
	Max.		kcal/h	5,159	5,589	
Power input	Cooling	Nom.	kW	1.05	1.36	
	Heating	Nom.	kW	1.31	1.45	
Nominal efficiency	EER			3.99	3.68	
	COP			4.12	4.00	
	Annual energy consumption		kWh	526	679	
	Energy labeling Directive	Cooling			A	
	Heating			A		
Space cooling	Energy efficiency class				A++	
	Capacity	Pdesign	kW	4.20	5.00	
	SEER			7.50	7.33	
	Annual energy consumption		kWh/a	196	239	
Space heating (Average climate)	Capacity	Pdesign	kW	3.80	4.00	
	Energy efficiency class				A++	
	SCOP/A				4.60	
	SCOPnet/A				4.65	
	Pdh Heating capacity at -10°		kW	3.04	3.19	
	Annual energy consumption		kWh/a	1,156	1,218	
	Required back up heating cap at design conditions		kW	0.76	0.81	
	Capacity	Pdesign	kW	2.05	2.16	
Space heating (Warm climate)	Energy efficiency class				A+++	
	SCOP			5.87	5.86	
	SCOPnet			5.99	5.97	
	Annual energy consumption		kWh/a	489	516	
	Required back up heating cap at design conditions		kW		0.00	
	Space cooling	A Condition	Pdc	kW	4.20	5.00
		(35°C - 27/19)	EERd		3.99	3.68
			Power input	kW	1.05	1.36
B Condition		Pdc	kW	3.10	3.69	
(30°C - 27/19)		EERd		5.58	5.28	
		Power input	kW	0.56	0.70	
C Condition		Pdc	kW	1.99	2.37	
(25°C - 27/19)		EERd		9.35	9.24	
		Power input	kW	0.21	0.26	
D Condition		Pdc	kW	1.86	1.87	
(20°C - 27/19)		EERd		12.08	12.03	
		Power input	kW	0.15	0.16	

2 Specifications

2 - 1 Specifications

2

Technical specifications				FTXA42DP + RXA42B8		FTXA50DP + RXA50B8		
Space heating (Average climate)	TOL	Tol (temperature operating limit)		°C			-15	
	TBivalent	Tbiv (bivalent temperature)		°C			-7	
		Pdh (declared heating cap)		kW	3.37			3.54
		COPd (declared COP)				3.16		
	A Condition (-7°C)	Power input		kW	1.07			1.12
		Pdh (declared heating cap)		kW	3.37			3.54
		COPd (declared COP)				3.16		
	B Condition (2°C)	Power input		kW	1.07			1.12
		Pdh (declared heating cap)		kW	2.05			2.16
		COPd (declared COP)			4.47			4.46
	C Condition (7°C)	Power input		kW	0.46			0.48
		Pdh (declared heating cap)		kW	1.65			1.71
		COPd (declared COP)			6.33			6.32
	D Condition (12°C)	Power input		kW	0.26			0.27
		Pdh (declared heating cap)		kW		1.52		
COPd (declared COP)			7.35			7.25		
E condition (-10°C)	Power input		kW		0.21			
	Pdh (declared heating cap)		kW	3.04			3.19	
	COPd (declared COP)				2.98			
Space heating (Average climate)	E condition (-10°C)	Power input		kW	1.02			1.07
Space heating (Warm climate)	TOL	Tol (temperature operating limit)		°C			-15	
	TBivalent	Tbiv (bivalent temperature)		°C			2	
		Pdh (declared heating cap)		kW	2.05			2.16
		COPd (declared COP)			4.47			4.46
	B Condition (2°C)	Power input		kW	0.46			0.48
		Pdh (declared heating cap)		kW	2.05			2.16
		COPd (declared COP)			4.47			4.46
	C Condition (7°C)	Power input		kW	0.46			0.48
		Pdh (declared heating cap)		kW	1.65			1.71
		COPd (declared COP)			6.33			6.32
	D Condition (12°C)	Power input		kW	0.26			0.27
		Pdh (declared heating cap)		kW		1.52		
		COPd (declared COP)			7.35			7.25
	E condition (2°C)	Power input		kW		0.21		
		Pdh (declared heating cap)		kW	2.05			2.16
COPd (declared COP)			4.47			4.46		
Power consumption in other than active mode	Power input		kW	0.46			0.48	
	Crankcase heater mode	PCK	W			0		
	Off mode	POFF	W			1		
Standby mode	Cooling	PSB	W			1		
	Heating	PSB	W			1		
Thermo-stat-off mode	PTO	Cooling	W			12		
		Heating	W			13		
Cooling	Cdc (Degradation cooling)					0.25		
Heating	Cdh (Degradation heating)					0.25		
Cooling function included						Yes		
Heating function included						Yes		
Average climate included						Yes		
Cold season included						No		
Warm season included						Yes		
Eurovent	Sound power level outdoor	Cooling	Nom.	dB(A)			62	
		Heating	Nom.	dB(A)			60	
	Piping length	Cooling	Measuring condition	m			5.00	
Voltage range	Min.						-10	
	Max.						10	
Electrical specifications				FTXA42DP + RXA42B8		FTXA50DP + RXA50B8		
Power factor	Nominal	Cooling	%	93.40			95.30	
		Heating	%	95.50			96.50	
Current - 50Hz	Maximum fuse amps (MFA)		A			13.00		
	Minimum circuit amps (MCA)		A			12.84		
Power supply	Frequency		Hz			50		
	Voltage		V			220-240		

2 Specifications

2 - 1 Specifications

Electrical specifications			FTXA42DP + RXA42B8	FTXA50DP + RXA50B8
Voltage range	Max.	%		10
	Min.	%		-10

(1)Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. |

(2)Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. |

(3)See separate drawing for operation range

Technical specifications				FTXA42DY + RXA42B8	FTXA50DY + RXA50B8	
Cooling capacity	Min.		kW		1.70	
	Min.		Btu/h		5,800	
	Min.		kcal/h		1,462	
	Nom.		kW	4.20	5.00	
	Nom.		Btu/h	14,300	17,100	
	Nom.		kcal/h	3,611	4,299	
	Max.		kW	5.00	5.30	
	Max.		Btu/h	17,100	18,100	
	Max.		kcal/h	4,299	4,557	
Heating capacity	Min.		kW		1.70	
	Min.		Btu/h		5,800	
	Min.		kcal/h		1,462	
	Nom.		kW	5.40	5.80	
	Nom.		Btu/h	18,400	19,800	
	Nom.		kcal/h	4,643	4,987	
	Max.		kW	6.00	6.50	
	Max.		Btu/h	20,500	22,200	
	Max.		kcal/h	5,159	5,589	
Power input	Cooling	Nom.	kW	1.05	1.36	
	Heating	Nom.	kW	1.31	1.45	
Nominal efficiency	EER			3.99	3.68	
	COP			4.12	4.00	
	Annual energy consumption		kWh	526	679	
	Energy labeling Directive	Cooling Heating			A A	
Space cooling	Energy efficiency class				A++	
	Capacity	Pdesign	kW	4.20	5.00	
	SEER			7.50	7.33	
	Annual energy consumption		kWh/a	196	239	
Space heating (Average climate)	Capacity	Pdesign	kW	3.80	4.00	
	Energy efficiency class				A++	
	SCOP/A				4.60	
	SCOPnet/A				4.65	
	Pdh Heating capacity at -10°		kW	3.04	3.19	
	Annual energy consumption		kWh/a	1,156	1,218	
	Required back up heating cap at design conditions		kW	0.76	0.81	
	Capacity	Pdesign	kW	2.05	2.16	
Space heating (Warm climate)	Energy efficiency class				A+++	
	SCOP			5.87	5.86	
	SCOPnet			5.99	5.97	
	Annual energy consumption		kWh/a	489	516	
	Required back up heating cap at design conditions		kW		0.00	
	Space cooling	A Condition	Pdc	kW	4.20	5.00
		(35°C - 27/19)	EERd		3.99	3.68
			Power input	kW	1.05	1.36
B Condition		Pdc	kW	3.10	3.69	
(30°C - 27/19)		EERd		5.58	5.28	
		Power input	kW	0.56	0.70	
C Condition		Pdc	kW	1.99	2.37	
(25°C - 27/19)		EERd		9.35	9.24	
		Power input	kW	0.21	0.26	
D Condition		Pdc	kW	1.86	1.87	
(20°C - 27/19)		EERd		12.08	12.03	
		Power input	kW	0.15	0.16	

2 Specifications

2 - 1 Specifications

2

Technical specifications				FTXA42DY + RXA42B8		FTXA50DY + RXA50B8		
Space heating (Average climate)	TOL	Tol (temperature operating limit)		°C			-15	
	TBivalent	Tbiv (bivalent temperature)		°C			-7	
		Pdh (declared heating cap)		kW	3.37			3.54
		COPd (declared COP)				3.16		
	A Condition (-7°C)	Power input		kW	1.07			1.12
		Pdh (declared heating cap)		kW	3.37			3.54
		COPd (declared COP)				3.16		
	B Condition (2°C)	Power input		kW	1.07			1.12
		Pdh (declared heating cap)		kW	2.05			2.16
		COPd (declared COP)			4.47			4.46
	C Condition (7°C)	Power input		kW	0.46			0.48
		Pdh (declared heating cap)		kW	1.65			1.71
		COPd (declared COP)			6.33			6.32
	D Condition (12°C)	Power input		kW	0.26			0.27
		Pdh (declared heating cap)		kW		1.52		
COPd (declared COP)			7.35			7.25		
E condition (-10°C)	Power input		kW		0.21			
	Pdh (declared heating cap)		kW	3.04			3.19	
	COPd (declared COP)				2.98			
Space heating (Average climate)	E condition (-10°C)	Power input		kW	1.02			1.07
Space heating (Warm climate)	TOL	Tol (temperature operating limit)		°C			-15	
	TBivalent	Tbiv (bivalent temperature)		°C			2	
		Pdh (declared heating cap)		kW	2.05			2.16
		COPd (declared COP)			4.47			4.46
	B Condition (2°C)	Power input		kW	0.46			0.48
		Pdh (declared heating cap)		kW	2.05			2.16
		COPd (declared COP)			4.47			4.46
	C Condition (7°C)	Power input		kW	0.46			0.48
		Pdh (declared heating cap)		kW	1.65			1.71
		COPd (declared COP)			6.33			6.32
	D Condition (12°C)	Power input		kW	0.26			0.27
		Pdh (declared heating cap)		kW		1.52		
		COPd (declared COP)			7.35			7.25
	E condition (2°C)	Power input		kW		0.21		
		Pdh (declared heating cap)		kW	2.05			2.16
COPd (declared COP)			4.47			4.46		
Power consumption in other than active mode	Power input		kW	0.46			0.48	
	Crankcase heater mode	PCK	W			0		
	Off mode	POFF	W			1		
Standby mode	Cooling	PSB	W			1		
	Heating	PSB	W			1		
Thermo-stat-off mode	PTO	Cooling	W			12		
		Heating	W			13		
Cooling	Cdc (Degradation cooling)					0.25		
Heating	Cdh (Degradation heating)					0.25		
Cooling function included							Yes	
Heating function included							Yes	
Average climate included							Yes	
Cold season included							No	
Warm season included							Yes	
Eurovent	Sound power level outdoor	Cooling	Nom.	dB(A)			62	
		Heating	Nom.	dB(A)			60	
	Piping length	Cooling	Measuring condition	m			5.00	
Voltage range	Min.					-10		
	Max.					10		
Electrical specifications				FTXA42DY + RXA42B8		FTXA50DY + RXA50B8		
Power factor	Nominal	Cooling	%	93.40			95.30	
		Heating	%	95.50			96.50	
Current - 50Hz	Maximum fuse amps (MFA)		A			13.00		
	Minimum circuit amps (MCA)		A			12.84		
Power supply	Frequency		Hz			50		
	Voltage		V			220-240		

2 Specifications

2 - 1 Specifications

Electrical specifications			FTXA42DY + RXA42B8	FTXA50DY + RXA50B8
Voltage range	Max.	%		10
	Min.	%		-10

(1)Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. |

(2)Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. |

(3)See separate drawing for operation range

Technical Specifications				RXA42B8	RXA50B8		
Refrigerant	Charge			tCO ₂ Eq	0.75		
Casing	Colour				Ivory white		
Dimensions	Unit	Height			mm	734	
		Width			mm	954	
		Depth			mm	401	
	Packed unit	Height			mm	820	
		Width			mm	1,050	
		Depth			mm	480	
Weight	Unit			kg	49		
	Packed unit			kg	53		
Packing	Weight			kg	4		
Heat exchanger	Length			mm	920		
	Rows	Quantity				2	
	Fin pitch			mm	1.4		
	Stages	Quantity				32	
	Passes	Quantity				2.2	
	Tube type					ø7 Hi-XD	
	Fin	Type				Waffle fin (PE)	
	Fan	Type				Propeller fan	
		Air flow rate	Cooling	Nom.	m ³ /min	45.4	46.6
				cfm	1,602	1,645	
Heating		Nom.	m ³ /min		44.1		
		cfm		1,557			
Fan motor	Model				DFC07A1VA		
	Output			W	55		
	Speed	Cooling	High	rpm		760	
			Nom.	rpm	740	760	
			Low	rpm		740	
	Heating	High	rpm		720		
		Nom.	rpm		720		
Low		rpm		660			
Compressor	Model				2Y147BKBX1P#D		
	Oil Amount			cm ³	650		
	Type				Hermetically sealed swing compressor		
	Output			W	1,300		
	Oil Type				FW68DA		
Operation range	Cooling	Ambient	Min.	°CDB	-10		
			Max.	°CDB	46		
	Heating	Ambient	Min.	°CWB	-15		
				°CDB	-15		
				°CWB	18		
				°CDB	24		
Sound power level	Cooling	Nom.			dBA	62	
	Heating	Nom.			dBA	62	
Sound pressure level	Cooling	Nom.			dBA	48	
	Heating	Nom.			dBA	48	
Refrigerant	Type				R-32		
	Charge			kg	1.1		
	Charge			tCO ₂ Eq	0.75		
	GWP				675		
	Piping connections	Liquid	OD			mm	6.4
Gas		OD			mm	9.5	
Drain		OD			mm	16	
Piping length		OU - IU	Max.			m	30
Additional refrigerant charge				kg/m	0.02 (for piping length exceeding 10m)		
Level difference		IU - OU	Max.			m	20
Heat insulation						Both liquid and gas pipes	
Capacity control						Inverter controlled	
Method							

Standard accessories: Installation manual;Quantity: 1;

Standard accessories: Refrigerant charge label;Quantity: 1;

Standard accessories: Multilingual fluorinated greenhouse gases labels;Quantity: 1;

Standard accessories: Drain cap;Quantity: 3;

Standard accessories: Drain plug;Quantity: 1;

2 Specifications

2 - 1 Specifications

2

Electrical Specifications				RXA42B8	RXA50B8
Power supply	Phase			1~	
	Frequency	Hz		50	
	Voltage		V	220-240	
Wiring connections	For power supply	Quantity		3	
		Remark		Earth wire included	
	For connection with indoor	Quantity		4	
		Remark		Earth wire included	
Current - 50Hz	Maximum fuse amps (MFA)	Maximum fuse amps (MFA)	A	13	

(1)See separate drawing for operation range |

(2)See separate drawing for electrical data |

(3)Contains fluorinated greenhouse gases

3 Electrical data

3 - 1 Electrical Data

RXA42-50B8

Unit combination restrictions		Power supply				COMP		OFM		IFM		
Outdoor unit	Indoor unit	Hz	Voltage	Voltage range	MCA	MFA	RHz	RLA	kW	FLA	kW	FLA
RXA42B5V1B8	FTXA42A2V1BW	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	12,46	13	45	4,1	0,066	0,83	0,052	0,50
		50	230					3,9				
		50	240					3,6				
RXA42B5V1B8	FTXA42B2V1BS/B/T	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	12,46	13	45	4,1	0,066	0,83	0,052	0,50
		50	230					3,9				
		50	240					3,6				
RXA42B5V1B8	FTXA42C2V1BW/S/B	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	12,46	13	45	4,1	0,066	0,83	0,052	0,50
		50	230					3,9				
		50	240					3,6				
RXA42B5V1B8	FTXA42D2V1BG/ P/L/C/Y	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	12,46	13	45	4,1	0,066	0,83	0,052	0,50
		50	230					3,9				
		50	240					3,6				
RXA50B5V1B8	FTXA50A2V1BW	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	12,46	13	59	5,4	0,066	0,83	0,056	0,50
		50	230					5,2				
		50	240					5,1				
RXA50B5V1B8	FTXA50B2V1BS/B/T	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	12,46	13	59	5,4	0,066	0,83	0,056	0,50
		50	230					5,2				
		50	240					5,1				
RXA50B5V1B8	FTXA50C2V1BW/S/B	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	12,46	13	59	5,4	0,066	0,83	0,056	0,50
		50	230					5,2				
		50	240					5,1				
RXA50B5V1B8	FTXA50D2V1BG/ P/L/C/Y	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	12,46	13	59	5,4	0,066	0,83	0,056	0,50
		50	230					5,2				
		50	240					5,1				

Symbols

MCA: Minimum Circuit Amperes [A]
 MFA: Maximum Fuse Amperes [A]
 COMP: Compressor
 RHz: Rated operating frequency [Hz]
 RLA: Rated Load Amperes [A]
 OFM: Outdoor fan motor
 IFM: Indoor fan motor
 kW: Fan motor rated output [kW]
 FLA: Full Load Amperes [A]
 MAX.: Maximum
 MIN.: Minimum

Notes

- The 'RLA' is based on the following conditions.
 Outdoor temperature -35°C DB
 Indoor temperature -27°C DB / -19°C WB
- Select the wire size according to the MCA.
- The maximum allowable voltage that is unbalanced between phases is -2%.
- Use a circuit breaker instead of a fuse.

4D151783A

4 Capacity tables

4 - 1 Cooling/Heating Capacity Tables

4

FTXA42A2V1BW + RXA42B5V1B8
FTXA42B2V1B(S/B/T) + RXA42B5V1B8
FTXA42C2V1B(W/S/B) + RXA42B5V1B8
FTXA42D2V1B(G/P/L/C/Y) + RXA42B5V1B8

Cooling -50Hz 220-240V-

AFR	13,1
BF	0,225

Indoor temperature			Outdoor temperature [°C DB]																	
EWB	EDB	°C	20			25			30			32			35			40		
			TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI
14	20	4,17	3,25	0,79	4,11	3,23	0,88	3,91	3,18	0,96	3,83	3,17	0,99	3,72	3,15	1,04	3,52	3,14	1,12	
16	22	4,50	3,13	0,81	4,30	3,06	0,89	4,11	3,01	0,97	4,03	2,99	1,00	3,91	2,96	1,05	3,71	2,93	1,12	
18	25	4,69	3,30	0,82	4,49	3,26	0,89	4,30	3,23	0,97	4,22	3,22	1,00	4,10	3,21	1,05	3,91	3,21	1,13	
19	27	4,79	3,59	0,82	4,59	3,58	0,90	4,40	3,59	0,97	4,32	3,60	1,01	4,20	3,62	1,05	4,00	3,69	1,13	
22	30	5,08	3,24	0,83	4,88	3,21	0,90	4,69	3,19	0,98	4,61	3,18	1,01	4,49	3,18	1,06	4,29	3,20	1,14	
24	32	5,27	3,02	0,83	5,07	2,99	0,91	4,88	2,96	0,99	4,80	2,95	1,02	4,68	2,94	1,06	4,49	2,93	1,14	

Heating -50Hz 220-240V-

AFR	14,6
-----	------

Indoor temperature		Outdoor temperature [°C WB]																	
EDB	°C	-15			-10			-5			0			6			10		
		TC	PI	SHC	TC	PI	SHC	TC	PI	SHC	TC	PI	SHC	TC	PI	SHC	TC	PI	SHC
15	2,57	0,84	3,09	0,97	3,61	0,97	4,13	1,22	5,59	1,28	6,07	1,32							
20	2,41	0,87	2,93	1,00	3,45	1,00	3,97	1,25	5,40	1,31	5,89	1,35							
22	2,35	0,88	2,87	1,01	3,39	1,01	3,90	1,26	5,33	1,32	5,81	1,37							
24	2,29	0,89	2,80	1,02	3,32	1,02	3,84	1,27	5,25	1,33	5,74	1,38							
25	2,25	0,89	2,77	1,02	3,29	1,02	3,81	1,28	5,21	1,34	5,70	1,38							
27	2,19	0,90	2,71	1,03	3,23	1,03	3,75	1,29	5,14	1,35	5,63	1,40							

Heating capacity at nominal operating frequency, measured according to -EN 14511-

Indoor temperature		Outdoor temperature [°C WB]																	
EDB	°C	-15			-10			-5			0			6			10		
		TC	PI	SHC	TC	PI	SHC	TC	PI	SHC	TC	PI	SHC	TC	PI	SHC	TC	PI	SHC
20	3,47	1,20	4,07	1,27	3,88	1,34	4,37	1,41	6,00	1,49	6,48	1,55							

Heating capacity at maximum operating frequency, measured according to EN 14511

Notes

- The bold cells indicate the standard conditions.
- The capacities are based on the following conditions:
Corresponding refrigerant piping length: -5- m
Level difference: -0- m
- The air flow rate and bypass factor are mentioned in the table.
- The ratings shown are net capacities which include a deduction for indoor fan motor heat.
- The total capacity, power input and sensible heat capacity must be calculated by interpolation, using the figures in the table (figures not in the table may not be used in the calculation).

Symbols

- AFR: Air flow rate [m³/min]
 BF: Bypass factor
 EWB: Entering wet-bulb temperature (°C WB)
 EDB: Entering dry-bulb temperature (°C DB)
 TC: Total capacity [kW]
 SHC: Sensible heat capacity [kW]
 PI: Power input [kW]

3D117642F

FTXA50A2V1BW + RXA50B5V1B8
FTXA50B2V1B(S/B/T) + RXA50B5V1B8
FTXA50C2V1B(W/S/B) + RXA50B5V1B8
FTXA50D2V1B(G/P/L/C/Y) + RXA50B5V1B8

Cooling -50Hz 220-240V-

AFR	13,5
BF	0,170

Indoor temperature			Outdoor temperature [°C DB]																	
EWB	EDB	°C	20			25			30			32			35			40		
			TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI
14	20	4,60	3,75	0,97	4,60	3,75	1,10	4,60	3,75	1,23	4,56	3,74	1,28	4,42	3,72	1,34	4,19	3,70	1,44	
16	22	5,35	3,71	1,05	5,12	3,63	1,15	4,89	3,56	1,25	4,79	3,53	1,29	4,65	3,50	1,35	4,42	3,46	1,45	
18	25	5,58	3,90	1,05	5,35	3,85	1,15	5,12	3,81	1,26	5,02	3,80	1,30	4,88	3,78	1,36	4,65	3,78	1,46	
19	27	5,70	4,24	1,06	5,47	4,22	1,16	5,23	4,22	1,26	5,14	4,23	1,30	5,00	4,25	1,36	4,77	4,32	1,46	
22	30	6,04	3,83	1,07	5,81	3,79	1,17	5,58	3,76	1,27	5,49	3,75	1,31	5,35	3,75	1,37	5,11	3,76	1,47	
24	32	6,27	3,58	1,07	6,04	3,53	1,17	5,81	3,49	1,27	5,72	3,48	1,31	5,58	3,47	1,37	5,34	3,46	1,47	

Heating -50Hz 220-240V-

AFR	15,1
-----	------

Indoor temperature		Outdoor temperature [°C WB]																	
EDB	°C	-15			-10			-5			0			6			10		
		TC	PI	SHC	TC	PI	SHC	TC	PI	SHC	TC	PI	SHC	TC	PI	SHC	TC	PI	SHC
15	2,76	0,93	3,32	1,08	3,88	1,08	4,43	1,35	6,00	1,42	6,52	1,47							
20	2,59	0,96	3,15	1,10	3,71	1,10	4,26	1,38	5,80	1,45	6,32	1,50							
22	2,52	0,97	3,08	1,11	3,64	1,11	4,19	1,39	5,72	1,46	6,24	1,51							
24	2,46	0,98	3,01	1,12	3,57	1,12	4,13	1,40	5,64	1,48	6,16	1,52							
25	2,42	0,99	2,98	1,13	3,54	1,13	4,09	1,41	5,60	1,48	6,12	1,53							
27	2,35	1,00	2,91	1,14	3,47	1,14	4,02	1,42	5,52	1,50	6,04	1,54							

Heating capacity at nominal operating frequency, measured according to -EN 14511-

Indoor temperature		Outdoor temperature [°C WB]																	
EDB	°C	-15			-10			-5			0			6			10		
		TC	PI	SHC	TC	PI	SHC	TC	PI	SHC	TC	PI	SHC	TC	PI	SHC	TC	PI	SHC
20	3,82	1,42	4,46	1,50	4,23	1,59	4,75	1,67	6,50	1,77	7,01	1,84							

Heating capacity at maximum operating frequency, measured according to -EN 14511-

Notes

- The bold cells indicate the standard conditions.
- The capacities are based on the following conditions:
Corresponding refrigerant piping length: -5- m
Level difference: -0- m
- The air flow rate and bypass factor are mentioned in the table.
- The ratings shown are net capacities which include a deduction for indoor fan motor heat.
- The total capacity, power input and sensible heat capacity must be calculated by interpolation, using the figures in the table (figures not in the table may not be used in the calculation).

Symbols

- AFR: Air flow rate [m³/min]
 BF: Bypass factor
 EWB: Entering wet-bulb temperature (°C W)
 EDB: Entering dry-bulb temperature (°C DI)
 TC: Total capacity [kW]
 SHC: Sensible heat capacity [kW]
 PI: Power input [kW]


3D115057F

5 Dimensional drawings

5 - 1 Dimensional Drawings

RXA42-50B8

Model	øA	øB	C	D
RXA42B5V1B8	9.5	6.4	19	19
RXA50B5V1B8	12.7	6.4	19	20

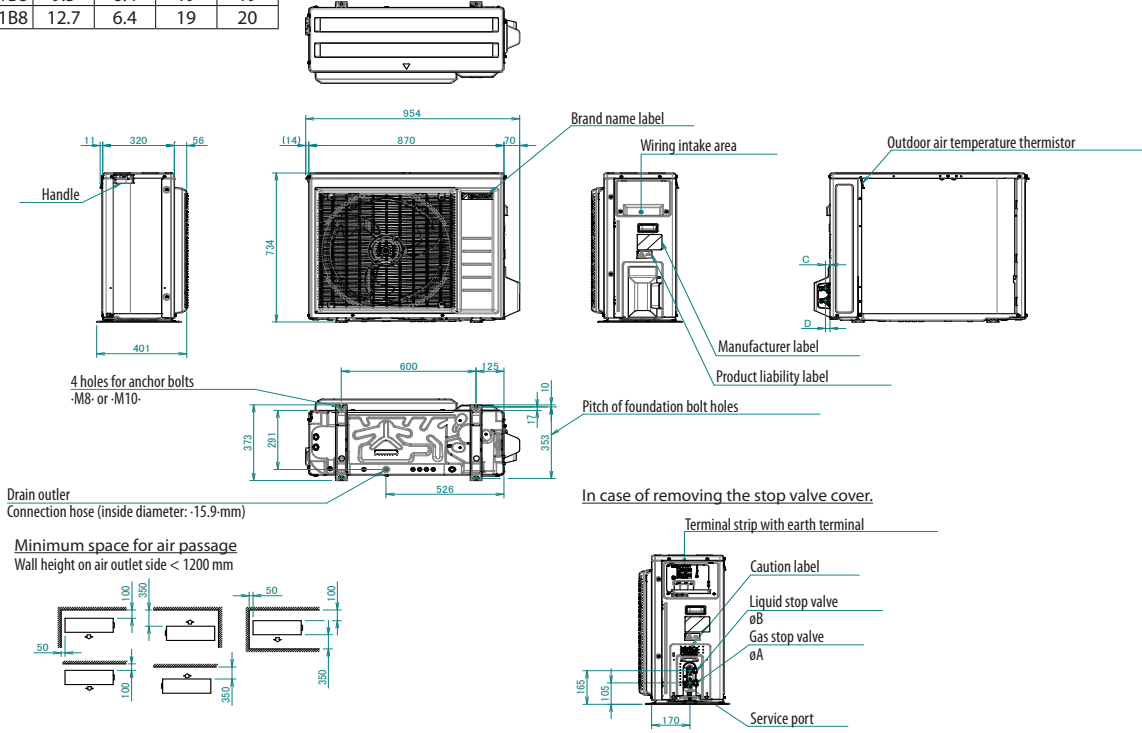


3D151857

6 Centre of gravity

6 - 1 Centre of Gravity

6



RXA42-50B8

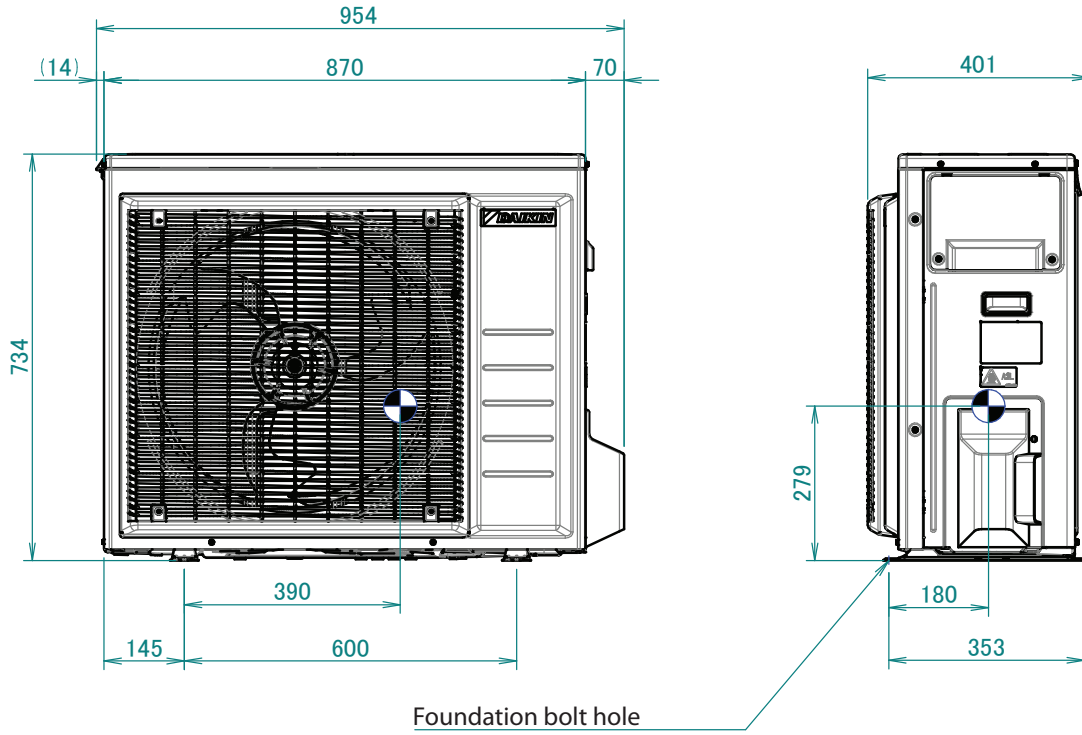

4D151963

7 Piping diagrams

7 - 1 Piping Diagrams

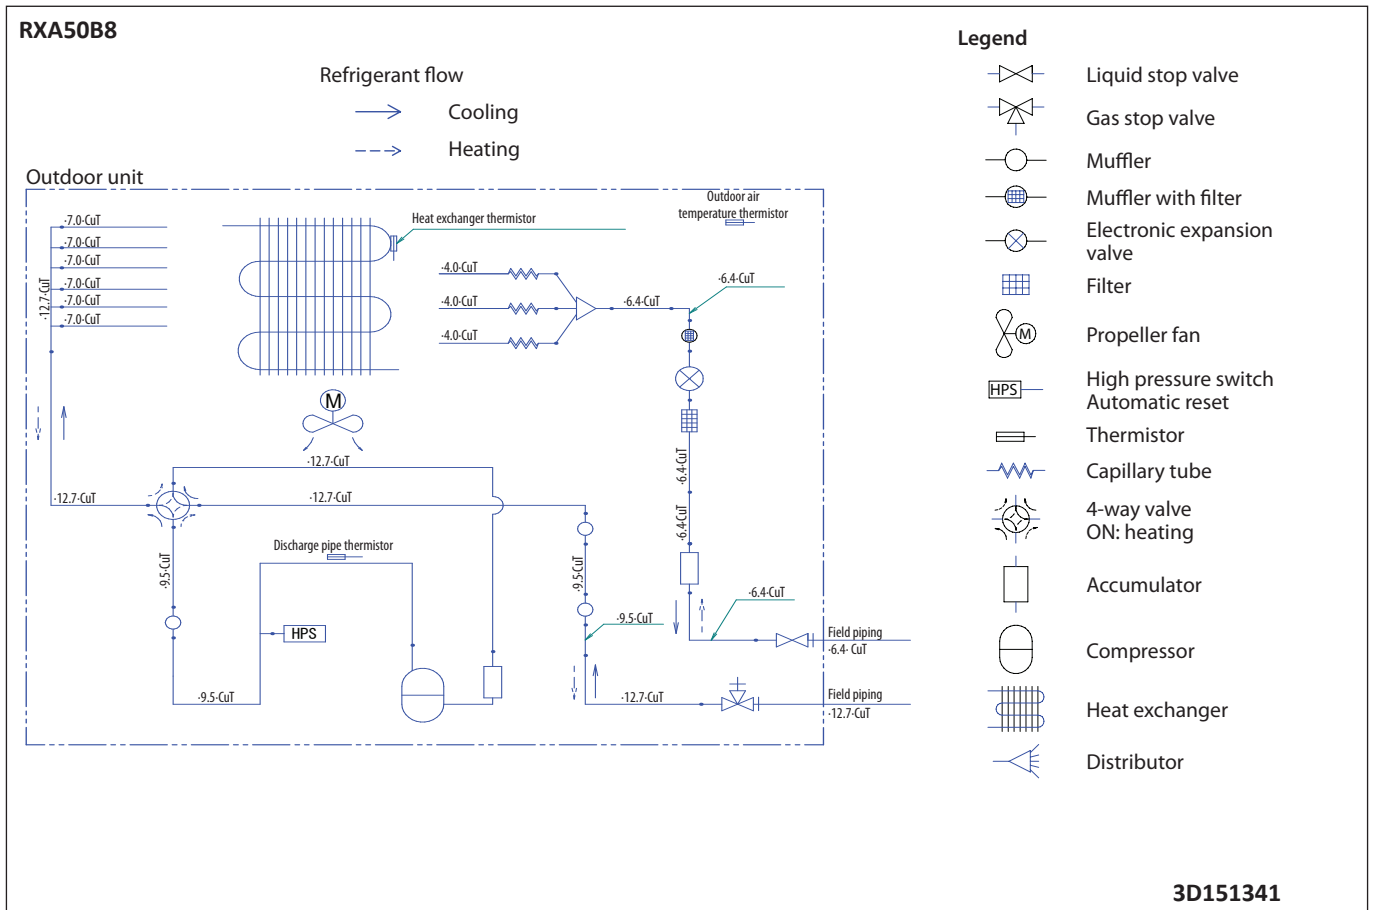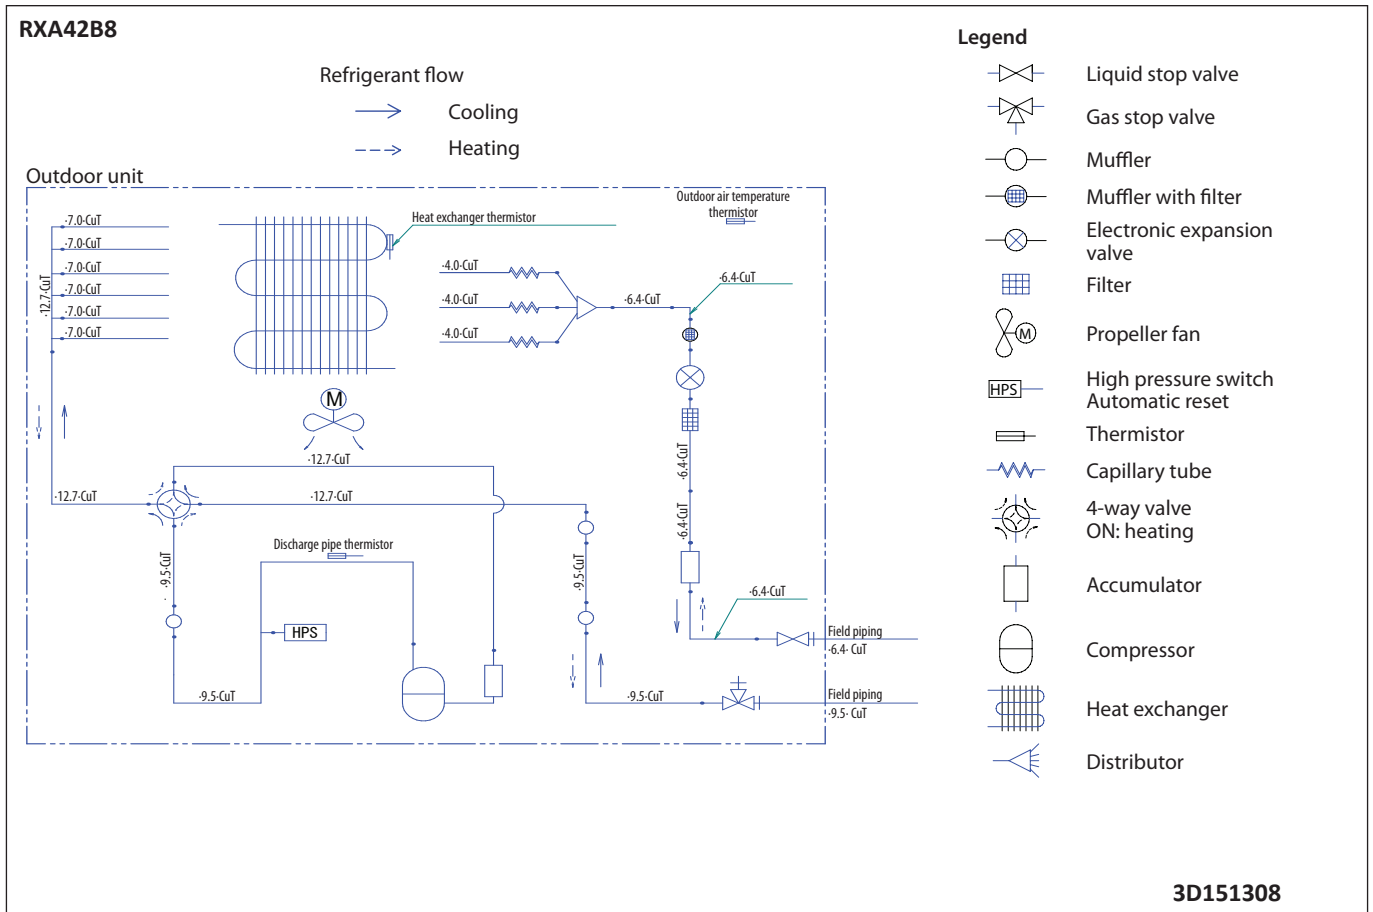

8 Wiring diagrams

8 - 1 Wiring Diagrams - Single Phase

8


RXA42-50B8

Field wiring

- BLK : Black
- BLU : Blue
- BRN : Brown
- GRN : Green
- GRY : Grey
- ORG : Orange
- YLW : Yellow
- RED : Red

- A1P Printed circuit board
- C7,C8 Capacitor
- F1U, F2U, F3U, F4U Fuse
- K4R, K10R, K20R, K30R Magnetic relay
- L Live
- L1R,L2R Reactor
- M1C Compressor motor
- M1F Fan motor
- N Neutral
- N=2,N=4,N=5 Number of passes
- PS Switching power supply
- Q1M Overload protector
- R1T~R5T Thermistor
- S1PH High pressure switch
- V821D, V822D Diode
- V817T, V818T IGBT
- V2R, V3R Intelligent power module
- V1R Diode bridge
- X1M Terminal strip
- X1A~X900A Connector
- Y1E Electronic expansion valve coil
- Y1S Reversing solenoid valve coil
- Z1C, Z2C, Z3C Ferrite core
- Z1F, Z2F Noise filter
- ⊕ Protective earth
- ⚡ Noiseless earth

Wiring diagram

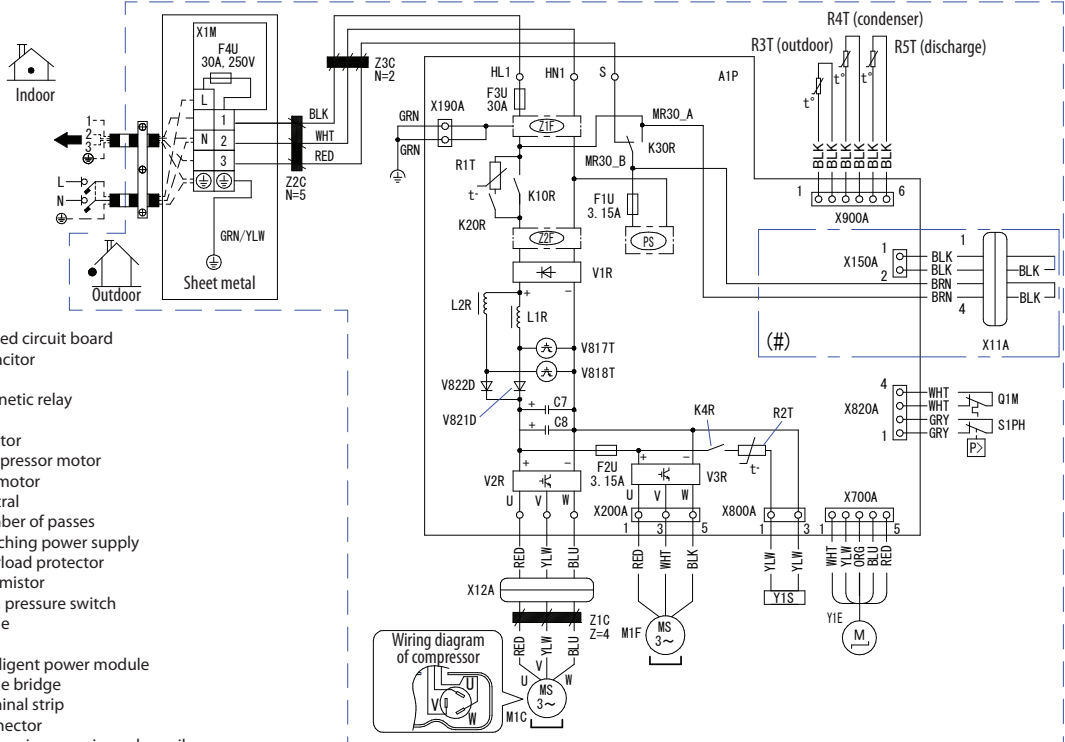

NOTES


1. Refer to the nameplate for the power requirements.
2. Do not remove or replace fuse when the units are energized.
3. (#) Only for the units with the suspend connector specified in the installation manual.

3D150217

9 Sound data

9 - 1 Sound Pressure Spectrum

RXA42B8

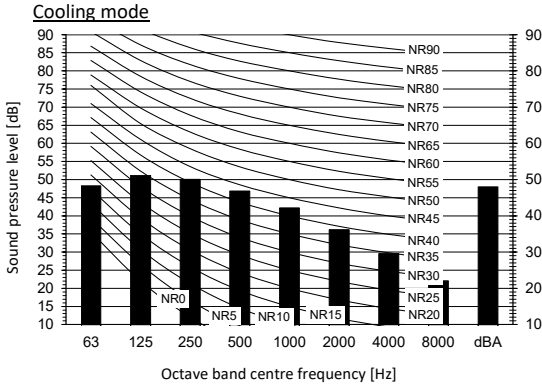

Cooling
Total dB

A	B
dBA	48


Legend

dBA = A-weighted sound pressure level (A scale according to IEC).

A Scale

B Fan speed: High

Heating mode

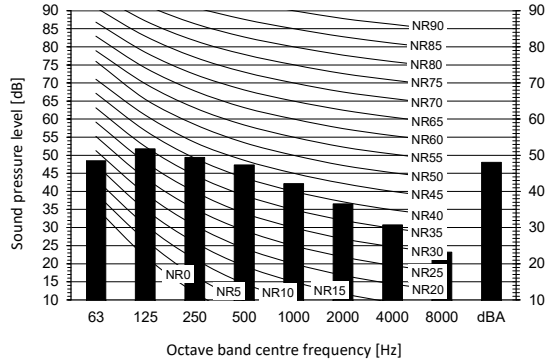


Heating
Total dB

A	B
dBA	48

Notes


1. Operating conditions: power source :220-240-V ·50-Hz; JIS standard
2. Background noise already taken into account.
3. Operating noise varies depending on operation and ambient conditions.
4. The operation noise measuring method is in accordance with JISC9612.
5. Measuring location: anechoic chamber

Location of microphone



3D117532A

RXA50B8

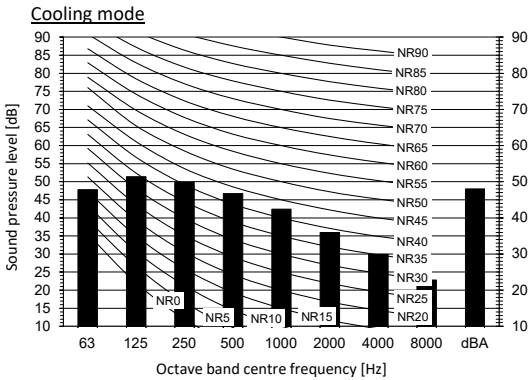

Cooling
Total dB

A	B
dBA	48


Legend

dBA = A-weighted sound pressure level (A scale according to IEC).

A Scale

B Fan speed: High

Heating mode

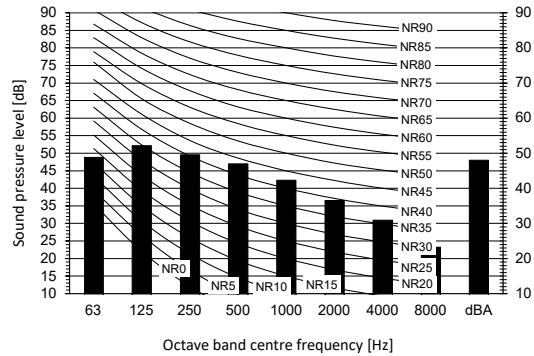


Heating
Total dB

A	B
dBA	48

Notes

1. Operating conditions: power source :220-240-V ·50-Hz; JIS standard
2. Background noise already taken into account.
3. Operating noise varies depending on operation and ambient conditions.
4. The operation noise measuring method is in accordance with JISC9612.
5. Measuring location: anechoic chamber

Location of microphone



3D117533A

10 Operation range



10 - 1 Operation Range

10

RXA42-50B8

Cooling


Heating

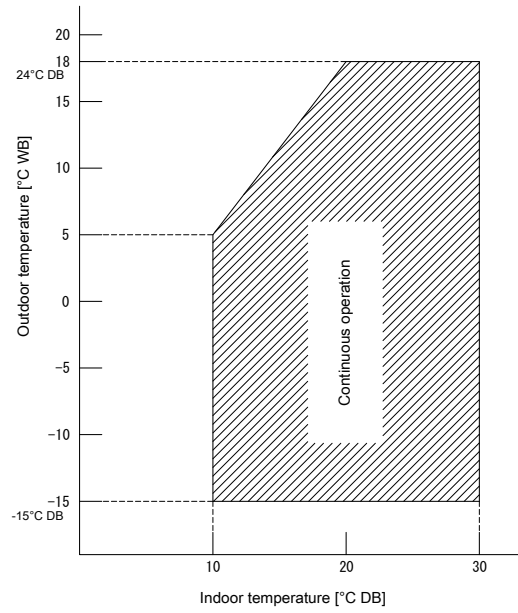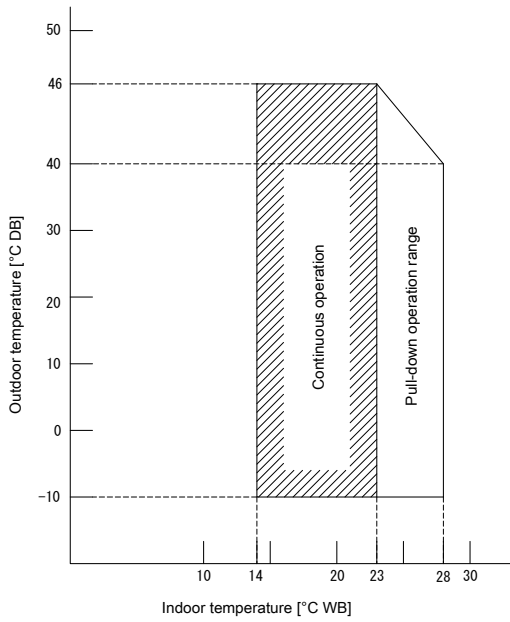

Notes

- The graphs is based on the following conditions.
 Corresponding refrigerant piping length: 5 m
 Level difference: 0m
 Air flow rate High

3D100846E



EEEN26

02/2026



The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.