

A close-up, low-angle shot of a white ceiling-mounted air conditioning unit. The unit is sleek and modern, with a curved design. The lighting is soft, highlighting the texture of the plastic and the metallic accents. The background is a plain, light-colored wall.

Our mission:


Your perfect
atmosphere

Information for end users: top efficiency and comfort range



Discreet comfort: FTXP-KV

Stylish front panel design blends with every interior including dry programme.

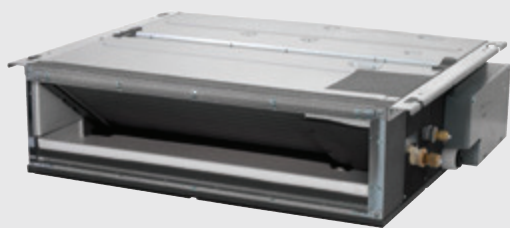

Concealed ceiling unit: FDXM-F

Only the suction and discharge grilles are visible.

Choose the right partner: pair and multi applications


Select the corresponding outdoor unit to best suit your needs. Pair applications connect one outdoor unit with one indoor unit. Space-saving multi units can connect up to five indoor units in multiple rooms.

Units for pair applications


- › RXZ-N (combined with Ururu Sarara)
- › RXJ-M (combined with Daikin Emura)
- › RXM-M (combined with FTXM-M)

Units for multi applications

- › 2MXM-M (combinable with FTXJ-M / FTXM-M, FDXM-F and FTXP-KV)
- › 3MXM-M (combinable with FTXJ-M / FTXM-M and FDXM-F)
- › 4MXM-M (combinable with FTXJ-M / FTXM-M and FDXM-F)
- › 5MXM-M (combinable with FTXJ-M / FTXM-M and FDXM-F)

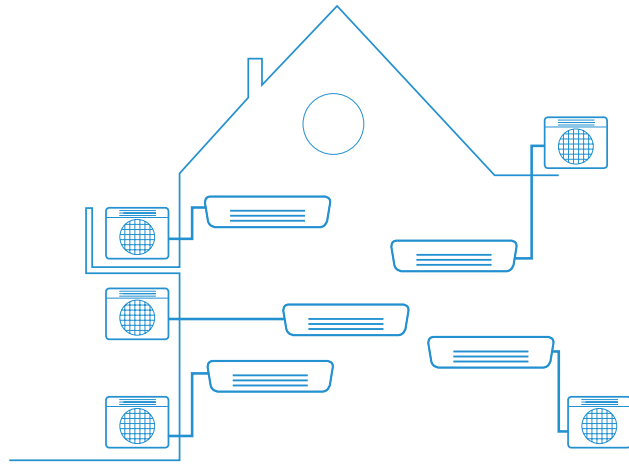

Pair application:
one outdoor unit per room

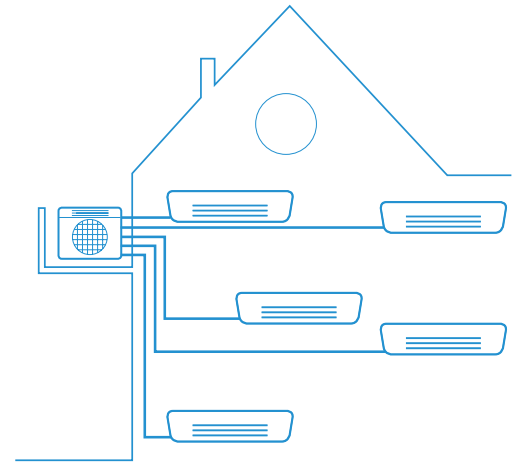

Multi application:
optimal solution when cooling or heating multiple rooms

Flexible installation – the elegant choice

Cooling with A+++ efficiency






Designed with energy-efficient compressors and refrigerants to provide optimum performance, most of our units can also cut their consumption by up to 80%.

Space saving multi outdoor units

Connect up to five indoor units with one multi outdoor unit. It is the optimal solutions for supplying all you need for cooling and heating multiple rooms.

Outdoor units and their connectable indoor units

BLUEEVOLUTION

Outdoor unit	Refrigerant		Wall mounted													Concealed ceiling					
	Sound power level	Type/ GWP	Daikin Emura FTXJ-MW/S				CTXM-M		FTXM-M					FTXP-KV			FDXM-F				
																					
Cooling/ Heating (dBA)	Charge (kg/ TCO ₂ Eq)	20	25	35	50	15	20	25	35	42	50	60	71	20	25	35	25	35	50	60	
2MXM40M	60	R-32/ 675	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
2MXM50M	61		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
3MXM40M	59		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
3MXM52M	59		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
3MXM68M	61		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
4MXM68M	61		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
4MXM80M	62		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
5MXM90M	66		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

*Note: blue cells contain preliminary data